

FIND WHAT MATTERS IN A BURRIS OPTIC

3

6

2019 NEW PRODUCTS THE BURRIS DIFFERENCE 4 BALLISTIC SERVICES H

HUNTING	8
ELIMINATOR® III LASERSCOPES®	10
VERACITY® RIFLESCOPES	14
FULLFIELD E1™ RIFLESCOPES	16
FULLFIELD II TM RIFLESCOPES	18
PREDATOR QUEST® RIFLESCOPES	20
DROPTINE® RIFLESCOPES	22
SCOUT RIFLESCOPES	24
TIMBERLINE™ RIFLESCOPES	25
HANDGUN SCOPES	26
SPEEDBEAD™ SHOTGUN MOUNT	27
ORACLE BOWSIGHT	28
BINOCULARS	30
SIGNATURE HD™ SPOTTING SCOPE	31

TACTICAL	32
XTR III RIFLESCOPES	34
XTR II RIFLESCOPES	36
MTAC [®] RIFLESCOPES	40
RT-6 RIFLESCOPE™	42
TACTICAL KITS	43
AR RIFLESCOPE™	46
MSR RIFLESCOPE™	47
T.M.P.R.™ SERIES	48
AR SIGHTS	50
FASTFIRE™	52
RINGS, MOUNTS, RETIC	LES
AND ACCESSORIES	54
RINGS AND MOUNTS	56
HUNTING MOUNT FIT CHART	62
TACTICAL MOUNT FIT CHART	62
RETICLES	64
HUNTNG PRODUCT SPECS	74
TACTICAL PRODUCT SPECS	78
ACCESSORIES	82

WARRANTY AND CUSTOMER SERVICE

83



2019 NEW PRODUCTS

NEW XTR III

XTR III 3.3-18x50mm / 5.5-28x56mm Page 34

Introducing the new generation of XTR riflescopes. Available in two new models and three reticle options, they take long range shooting to a new level. Designed and assembled in the USA, they feature front focal plane optical systems, 34mm tubes for extended adjustment, 5x Plus zoom and other competition inspired options.



NEW ORACLE BOWSIGHT Page 28

The innovative Oracle rangefinding bow sight instantly provides the exact distance to target and the exact aiming point, even at full draw. The Oracle learns your arrows trajectory, compensates for distance and angle of the shot, then presents the one and only perfect aiming dot.

201200	3.3-18x50 mm	SCR Mil
201201	3.3-18x50 mm	SCR MOA
201202	3.3-18x50 mm	SCR 2 Mil
201210	5.5-28x56 mm	SCR Mil
201210 201211	5.5-28x56 mm 5.5-28x56 mm	SCR Mil SCR MOA

NEW REAR FOCAL PLANE VERACITY MODELS


Page 14

New for 2019 are two new rear focal plane models 2-10x42mm and 3-15x50mm.

Calibrated for traditional, magnum and varmint loads, they are versatile enough for short or long-range hunting. Like all Veracity riflescopes they offer premium optics and coatings, 5x zoom system, the Burris MAD knob system and Ballistic E2 MOA reticle.

NEW ZERO CANT SINGLE PIECE XTREME TACTICAL BASE Page 61

Lock-in accuracy with this new zero cant base. Machined from a solid piece of steel with a Melonite® finish for strength and durability. Features a built-in recoil lug.



NEW XTR II



The 5x zoom system features premium lens coatings for maximum light transmission and side parallax adjustment for fine-tuned focus from 50 yards to infinity.

NEW AR P.E.P.R MOUNT Page 56

Available in 30mm, 34mm, and 35 mm options, this new QD P.E.P.R. mount has reinforced polymer ring inserts that let you make 5-40 MOA of scope adjustment. QD mount insures 1/4 MOA repeatability.




THE BURRIS DIFFERENCE

Premium optical glass and top-quality lens coatings ensure that the best image possible is delivered every time you look through a Burris scope. The durable construction and precise, easy-to-use adjustment system give you the confidence that your Burris scope will perform reliably every time. With the added benefits of being fogproof, waterproof and shockproof, feel secure that your Burris scope will endure whatever Mother Nature throws at you.

PREMIUM OPTICAL QUALITY

Burris uses high-grade optical glass and design prescriptions specifically for each lens inside each scope. Lens prescription tolerances are measured in 1/10,000,000 of an inch. 100% of lenses are inspected multiple times during lens and scope production.



KEY BENEFITS



cuoci

SHOCKPROOF



WATERPROOF





NITROGEN-FILLED

SUPERIOR LENS COATINGS



The Burris exclusive **Index-Matched HiLume™ Multi-coating** provides superior image quality and clarity to deliver the best possible image to your eye.

- Maximizes light transmission for exceptional low light ability
- Minimizes glare for better visibility
- 99.5 to 99.8% light transmission per lens surface

Scratch Resistant Coating

- Placed on top of the anti-reflective coating to prevent lens damage
- Extends the life of the scope by preventing dings and scratches



4

RUGGED CONSTRUCTION



Advanced engineering and attention to detail create rugged, reliable riflescopes that will endure a lifetime of hard use.

6061 T-6 aluminum scope tubes

- 35,000 40,000 PSI yield strength
- Corrosion resistant

Solid one-piece tube design

- Machined from a single piece of seamless aluminum tubing
- Lightweight and very strong.

Double Internal Spring System

• Provides nearly double the force of single spring systems to ensure that point of impact will not shift

Precision-gauged, hand-fitted parts

• Perfect fit of internal parts guarantees accurate performance

PRECISION ADJUSTMENT SYSTEM

Every Burris riflescope features a steel-onsteel adjustment system that is positive and repeatable, with audible clicks.

Accurate and positive adjustments

- Precise tolerances ensure that each click moves the point-of-impact the correct amount
- Hardened steel-on-steel designs for long-term performance
- Finger-adjustable clicks are both tactile and audible

Wide variety of shooter and situation specific options

- Low or high profile adjustment knobs
- MOA or Mil increments, dimensionally matched to the reticle
- "M.A.D" System (Modular Adjustment Dial System) available on premium riflescope lines



BURRIS FOREVER WARRANTY™

Every Burris optic is covered by the Burris Forever Warranty[™]. We will repair or replace your Burris optic if it is damaged or defective. The warranty is automatically transferred to future owners

- No repair or replacement charge
- No questions asked
- No warranty card needed
- No receipt needed



BURRIS BALLISTIC SERVICES 2.0

The newly updated Burris Ballistic Services is a set of sophisticated online ballistic tools that will allow you to master any Burris ballistic compensating reticle, build a dope card, program your Eliminator riflescope, or order custom elevation knobs. Burris Ballistic Services will turn you into a reticle expert and a pro on the shooting range.

BULLET LIBRARY

Ballistics really begin with your bullet. The better the bullet info, the better your results. The Burris Ballistic Services tools are centered around the best bullet and cartridge libraries in the business: almost 7,000 different cartridges and bullets are included from nearly every manufacturer.



Select Amn	nunition Type
· Factory load	C Hand Load
Factory	Ammo Details
Select Ammunition manufact	within .
HORNADY	
Select Cartridge:	
6.5 CREEDMOOR);
Select Bullet Weight/Style/Ty	pe/Description:
The field AMAX - BTTPs RC Trig TAM Equitments - 200 Sty ST Augentermans - 200 Sty Restand Equitments - 200 Sty Restand AMAX - 21146 DC Trig Hain AMAX - 201 File Styr AMAX - 801 AMI Styr AMAX - 801 AMI	No 62 6 489 Se BC 6485 Stroky BC 8 488 1585
Muzzle Velocity:	Ballatic Coefficient
2910	0.465

STEP 2


BurrisOptics.com/Ballistics


DOPE CARD

The Dope Card tool was designed with the serious shooter in mind, but it's also a great way for anyone to learn more about long-range shooting. The Burris Dope Card tool provides a level of detail that goes beyond the vast majority of ballistic tools available now.

BALLISTIC RETICLE ANALYSIS CALCULATOR

Burris offers a wide variety of reticles, and this tool ensures you can utilize their full potential.





Ballistic Plex E1™ FFP Varmint XTR II Ballistic 5.56 Gen 3





ELIMINATOR LASER RIFLESCOPE

The Eliminator LaserScope requires basic programming to work correctly. Using our industry-leading bullet library and ballistic engine, you can now quickly get the ballistic information needed to program your Eliminator scope.

CUSTOM SERVICES AND TECHNICAL HELP

The Burris Custom Shop can help you upgrade the knobs and reticles on many of our riflescopes. Prices will vary depending upon the model and upgrade desired. Here are some approximate costs:

- Knob upgrades start at \$40
- Custom MAD knobs start at \$50
- Reticle changes start at \$60

For specific costs and ordering, call the Technical Support line at 888-440-0244.

CUSTOM KNOBS

Burris now offers custom knobs for most of our riflescopes. This function allows you to modify the elevation knob to match your exact cartridge and environmental shooting conditions.

The following list of Burris riflescopes can accept custom knobs and options can be ordered using the Custom Knob tool:

M.A.D. SYSTEM

The Modular Adjustment Dial (M.A.D.) System lets you choose from exposed competition-style knobs or capped knobs for windage and elevation adjustments.

You can also add custom knobs with laser-etched markings that perfectly match the trajectory of any ammunition.

The following configurations are possible in the M.A.D. System:

- Capped knobs with Mil or MOA markings
- Exposed knobs with Mil or MOA markings
- Capped knobs with custom trajectory markings
- Exposed knobs with custom trajectory markings

Shooters will be able to order custom knobs through Burris Customer Service at https://ballistics. burrisoptics.com/

The M.A.D. System is available for select XTR II and Veracity models. See the chart for specific models.

- AR RIFLESCOPES
- C4 PLUS DROPTINE
- FULLFIELD E1



MSR RIFLESCOPES

PREDATOR QUEST


• XTR II

Exposed (non-M.A.D.) Race Dial Low Capped Low Exposed 201200 3.3-18x50mm • • • 201201 3.3-18x50mm • • • 201202 3.3-18x50mm • • • 201202 3.3-18x50mm • • • • 201202 3.3-18x50mm • • • • 201202 5.5-28x56mm • • • • 201211 5.5-28x56mm • • • • 201212 5.5-28x56mm • • • • 201212 5.5-28x56mm • • • • XTR II · · · • •			ELEVATION DIAL		WINE	DAGE
201201 3.3-18x50mm • • • 201202 3.3-18x50mm • • • 201210 5.5-28x56mm • • • 201211 5.5-28x56mm • • • 201212 5.5-28x56mm • • • 201212 5.5-28x56mm • • • 201212 5.5-28x56mm • • •	XTR III	(
201202 3.3-18x50mm • • • 201210 5.5-28x56mm • • • 201211 5.5-28x56mm • • • 201212 5.5-28x56mm • • • 201212 5.5-28x56mm • • • 201212 5.5-28x56mm • • •	201200	3.3-18x50mm		•	•	•
201210 5.5-28x56mm • • • 201211 5.5-28x56mm • • • 201212 5.5-28x56mm • • •	201201	3.3-18x50mm	•	0	•	•
201211 5.5-28x56mm • • • 201212 5.5-28x56mm • • • • Low Low Low Low Low Low Low	201202	3.3-18x50mm	•	0	•	•
201212 5.5-28x56mm • • • • Low Low Low Low Low	201210	5.5-28x56mm	•	0	•	•
Low Low Low Low	201211	5.5-28x56mm	•	0	•	•
	201212	5.5-28x56mm	•	0	•	•
	XTR II			2011	2011	
201018 1-8x24mm • • • •	201018	1-8x24mm	•	•		0
201019 1-8x24mm • • • • • • • • • • • • • • • • • •	201019	1-8x24mm	• Low	Low	Low	
VERACITY Capped Exposed Capped Exposed	VERACI	TY	Capped	Exposed	Capped	Exposed
200621 2-10X42mm • • • •	200621	2-10X42mm	•	0		0
200636 3-15x50mm • • • •	200636	3-15x50mm	•	0	•	0
200641 4-20x50mm • • • •	200641	4-20x50mm		0	•	0
200651 5-25x50mm • • • •	200651	5-25x50mm	•	0	•	0
200652 5-25x50mm • • •	200652	5-25x50mm	•	•	•	•

Installed on scope
 Packaged with scope

• Optional - contact for purchase



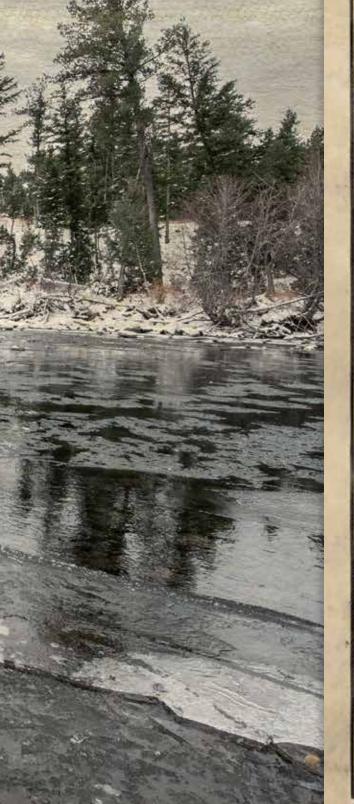

HUNT PRODUCT

TRUST US WITH YOUR HUNT

Finding corners of the world still devoid of a cell signal. The relationships solidified while hanging a trophy in camp. The laughter around the campfire as the last flame hangs on. Those familiar with Burris know well what matters. It's about self-reliance. Respect for the game and those you hunt beside. Pushing yourself season after season to be your absolute best. For more than 40 years we've been right there with you, pushing ourselves for the same reasons: we know exactly how much the season means to us, and that's why you can forever trust your hunt to Burris.





ELIMINATOR III

The **Eliminator® III LaserScope™** is the most innovative and effective hunting riflescope in the world. Combining outstanding optics, pinpoint laser rangefinding and precision trajectory compensation for the exact ammunition you choose for your hunt, it eliminates most of the variables and guesswork that often cause hunters to go home empty-handed. In one fast sequence the Eliminator III determines the distance to your target, factors in your trajectory and illuminates the perfect holdover. It's that simple.

The Eliminator III significantly extends the range and accuracy of your favorite rifle. No other riflescope combines this level of quality, technology, accuracy, repeatability, speed and effectiveness. It will greatly increase the distance at which you can make an ethical shot.

FOUR TOOLS IN ONE ADVANCED OPTIC!

The Burris Eliminator III is unlike any other scope. Combining four tools into one advanced optic. Eliminating problems, so you can focus on the shot.

Precision

- Ontic
- Precision Optic. All lenses are fully multi-coated for sharp, crisp, edge-to-edge clarity.
- Digital Inclinometer. An internal inclinometer delivers a precise aiming point for angled shots up to 45°
- Smart Dope Card. Simply program your cartridge and load into the Eliminator. The precise holdover is automatically determined
- Laser Range Finder. The built-in laser rangefinder will instantly determine the distance to your target out to 750 yards on game-sized targets

KEY FEATURES

- Automatic Trajectory Compensation. Customized trajectory compensation calculates the perfect holdover at your exact distance for your specific cartridge. Trajectory compensation works on any magnification.
- Wind Hold-Off. Scope displays a 10 mph Wind Value to indicate wind hold-off for your specific cartridge at the indicated range to target. Wind Value represents how many dots to hold into the wind for a 10 mph crosswind.
- No Rings Required. Riflescope comes with its own bases that attach to any Weaver-style or Picatinny base.

WINDAGE COMPENSATION

While complete wind compensation is not fully automated within the scope, it gives the shooter the tools needed to make a calculated hold-off estimate. In addition to distance, the scope's digital display will show a 10 mph Wind Value for your specific cartridge at the indicated range to your target.



www.burrisoptics.com/scopes/eliminator-iii-laserscope-series



Example 300 yards | 10-mph crosswind shooter holds 9 dots into the wind

Example 500 yards | 10-mph crosswind shooter holds 1.7 dots into the wind





WATCH THE VIDEO AT BURRISOPTICS.COM/ELIMINATOR



Two words: no guesswork. It's plug and play in a rangefinding scope that goes even bigger: Just feed the Eliminator III your cartridge's ballistic info and the scope calculates perfect holdover at your exact distance, estimates wind drift, then gives you a bright red dot of accuracy in seconds—all at the push of a button.

12

BURRIS OPTICS 2019





WATERPROOF SHOCKPROOF

FOGPROOF NITROGEN-FILLED

N₂





X96 Reticle

ELIMINATOR III LASERSCOPE 4-16x50mm

ITEM NUMBER: 200116, 200119

RETICLE: X96 RETICLE

ADJUSTABLE PARALLAX: 50 YDS. TO INFINITY

- High magnification extends your long-range shooting capability
- 50 mm objective allows for maximum light transmission
- Strong, low mounting system with its own bases mounts to any Weaver-style or Picatinny base; no rings required
- Reticle displays a 10 mph Wind Value to indicate wind hold-off for your specific cartridge at the indicated range to target; you estimate the actual wind speed and use the Wind Value as a guide to determine the number of dots to hold into the wind
- Model 200119 features Remote Cable Switch for convenient operation of On/Range button; expanded ballistic capability accomodates centerfire, rimfire, muzzleloader and slug gun loads



ELIMINATOR III LASERSCOPE 3-12x44mm

- ITEM NUMBER: 200120 RETICLE:
- X96 RETICLE

ADJUSTABLE PARALLAX: 50 YDS. TO INFINITY

- The lowest magnification in the series produces a compact, lightweight option
- Strong, low mounting system with its own bases mounts to any Weaver-style or Picatinny base; no rings required
- Reticle displays a 10 mph Wind Value to indicate wind hold-off for your specific cartridge at the indicated range to target; you estimate the actual wind speed and use the Wind Value as a guide to determine the number of dots to hold into the wind



SERIES FEATURES

- Customized trajectory compensation calculates the perfect holdover at your exact distance; program your cartridge's ballistics information, push a button, and a bright red illuminated dot signifies your new aiming point in a split second
- Built-in laser rangefinder features 1,200+ yards ranging capability
- Trajectory compensation is accurate at any magnification
- Integrated inclinometer compensates for shots at any uphill or downhill angle

TRIPLE THREAT IN THE WOODS

The Eliminator 4-16x50 (Model #200119) now has enhanced ballistic software that makes it a triple threat in the woods. Not only will it work for centerfire cartridges, but will now work on most rimfire, muzzleloader and slug guns as well. 5



The finest in premium, high light-transmitting scopes. 5x zoom and front or rear focal plane reticles deliver excellent target acquisition and a closer look at the big, bright picture.



WATERPROOF



SHOCKPROOF


FOGPROOF NITROGEN-FILLED


(N₂)

Ballistic E2™ RFP RETICLES

2017 BEST BUY

FIELD





FOREVER WARRANTY,



14

VERACITY RIFLESCOPE 2-10x42mm

ITEM NUMBER:	ITEM NUMBER:
200621 (M.A.D.)	NEW 200622 (M.A.D.)
RETICLE:	RETICLE:
BALLISTIC PLEX E1 [™] FFP	BALLISTIC E2™ RFP

 Low-profile adjustment knobs have finger-adjustment zero for windage and elevation; easily resets to zero once sighted-in

MAIN TUBE SIZE: 30 mm ADJUSTABLE SIDE PARALLAX: 50 YDS. TO INFINITY

VERACITY RIFLESCOPE 3-15x50mm

ITEM NUMBER:	ITEM NUMBER:	• Low-pr
200636 (M.A.D.)	NEW 200638 (M.A.D.)	windag
RETICLE: Ballistic plex e1™ FFP	RETICLE: BALLISTIC E2™ RFP	• 50 mm

Low-profile adjustment knobs have finger-adjustment zero for windage and elevation; easily resets to zero once sighted-in
50 mm objective allows for maximum light transmission

MAIN TUBE SIZE: 30 mm ADJUSTABLE SIDE PARALLAX: 50 YDS. TO INFINITY

VERACITY RIFLESCOPE 4-20x50mm

ITEM NUMBER: 200640 RETICLE: BALLISTIC PLEX ET FFP VARMINT	ITEM NUMBER: 200641 (M.A.D.) RETICLE: BALLISTIC PLEX E1 TM FFP	Ergonomic side focus allows easy-to-reach parallax	
MAIN TUBE SIZE: 30 mm	ADJUSTABLE SIDE PARALLAX: 50 YDS. TO INFINITY	adjustment Zero Click Stop adjustment knobs allow quick, easy return to original sight in setting without counting rotations 	

VERACITY RIFLESCOPE 5-25x50mm

ITEM NUMBERS:	ITEM NUMBER:
200650	200651 (M.A.D.)
RETICLE:	RETICLE:
BALLISTIC PLEX E1™ FFP VARMINT	BALLISTIC PLEX E1

: ITEM NUMBER: A.D.) 200652 (M.A.D.) RETICLE: EX E1™ FFP SCR™ MOA

MAIN TUBE SIZE: 30 mm ADJUSTABLE SIDE PARALLAX: 50 YDS. TO INFINITY

- Designed for precise adjustment at extreme ranges, perfect for varmint hunting; MAD knobs offer 24.5 MOA of adjustment in one rotation
- 50 mm objective allows for maximum light transmission
- Ergonomic side focus allows easy-to-reach parallax adjustment
- · Zero Click Stop adjustment knobs allow quick, easy return to sight-in yardage setting without counting rotations

SERIES FEATURES

- Our top-of-the-line hunting scopes featuring a 5x zoom system, a larger field of view and front focal plane design.
- Front focal plane reticle allows the reticle size to increase or decrease with magnification so trajectory compensation is always correct for the selected power setting
- Advanced windage and elevation adjustment is accurate and repeatable, and matches the reticle's MOA measurement system













MODULAR

DIAL (M.A.D.)

SYSTEM

ADJUSTMENT

M.A.D. SYSTEM

Models feature the M.A.D. System providing more accessibility and customization to windage and

elevations knobs and settings. Turret is single revolution.

See page 7

Burris. FULLFIELD E1 RIFLESCOPES

+ ★ ★ + FOREVER WARRANTY, + NO OUESTIONS ASKED + + NO OUESTIONS ASKED +

If you had to pick just one scope to have in your safe, the Fullfield E1 would be a sure winner. No matter where or how you hunt—from whitetail in the woods to elk in the Rockies—the Fullfield E1 will help you fill your freezer.

16

OPTICS 2019



SHOCKPROOL

<u>S</u>C

N₂

WATERPROOF

FOGPROOF NITROGEN-FILLED



ex Ballistic Plex E1™MV

RETICLES

Long-Range MOA

FULLFIELD E1 RIFLESCOPE 2-7x35mm

ITEM NUMBER: 200317

Low-magnification model is compact and lightweight;

RETICLE: BALLISTIC PLEX E1™ MAIN TUBE SIZE: 1 in.

allows low mounting height



FULLFIELD E1 RIFLESCOPE 3-9x40mm

ITEM NUMBERS: 200320, 200322 (Illuminated reticle) RETICIE BALLISTIC PLEX E1™ MAIN TUBE SIZE: 1 in.

Most popular and versatile model

• Available illuminated reticle has 10 settings from low light to daylight; reduces time to get on target in any lighting condition and increases accuracy when target is dark



FULLFIELD E1 RIFLESCOPE 4.5-14x42mm ITEM NUMBER:

200344

RETICIE

ITEM NUMBER: 200338 RETICIE BALLISTIC PLEX E1™

• High magnification extends your longrange shooting capability • Ergonomic side focus allows easy-to-LONG-RANGE MOA reach parallax adjustment

MAIN TUBE SIZE: 1 in.

ADJUSTABLE SIDE PARALLAX: **50 YDS. TO INFINITY**



FULLFIELD E1 RIFLESCOPE 6.5-20x50mm

ITEM NUMBER: 200341 RETICLE:

• High magnification extends your long-range shooting capability • Ergonomic side focus allows easy-to-reach parallax adjustment

BALLISTIC PLEX E1™ MV

MAIN TUBE SIZE: ADJUSTABLE SIDE PARALLAX: 1 in. **50 YDS. TO INFINITY**



SERIES FEATURES

- State-of-the-art Ballistic Plex E1[™] reticle features trajectory compensation out to 500 yards with cascading dots to compensate for crosswinds
- High-grade optical glass provides excellent brightness and clarity with lasting durability
- Quality, precision-ground lenses are larger than those of comparable scopes, for better light transmission
- Index-matched, HiLume™ multicoating aids in low-light performance and glare elimination, increasing your success rate
- Finger-adjustable windage and elevation knobs create a sleek profile; knob indications always reflect a change in the point of impact for pinpoint accuracy

SIMPLE, ACCURATE, EASY TO USE

The Ballistic Plex E1 features a durable etched glass reticle that simplifies the biggest challenges in long-distance shooting: determining holdover at distance and hold-off for wind drift. The hash marks on lower vertical crosshair are calibrated for dead-on aiming from 100 to 500 yds for nearly any big-game hunting cartridge. Cascading dots help you quickly and easily adjust for wind.

18

Burris. FULLFIELD[™]II RIFLESCOPES

d by the strength desdales, borne

FOREVER WARRANTY, NO DUESTIONS ASKED *

Ballistic Mil-Dot

RETICLES

Ballistic Plex™

Plex

A scope company is always been judged by the strength of its workhorse. This is our team of Clydesdales, borne of high-performance optical glass in a trusted, reliable, durable platform.



FOGPROOF NITROGEN-FILLED

N,

FULLFIELD II RIFLESCOPE 2-7x35mm

ITEM NUMBER 200123

• Low-magnification model is compact and lightweight; allows low mounting height

RETICLE: BALLISTIC PLEXTM

MAIN TUBE SIZE. 1 in.

FULLFIELD II RIFLESCOPE 3-9x40mm

RETICLE:

ITEM NUMBER: 200161 RETICLE: PLEX

ITEM NUMBERS . Available with matte or nickel finish 200162 (MATTE BLACK) 200169 (NICKEL) BALLISTIC PLEXTM

MAIN TUBE SIZE: 1 in.

FULLFIELD II RIFLESCOPE 4.5-14x42mm

ITEM NUMBER: 200183 RETICLE: BALLISTIC PLEX™ MAIN TUBE SIZE: 1 in. ADJUSTABLE PARALLAX: **50 YDS. TO INFINITY** High magnification extends long-range shooting capability Parallax adjustment provides improved accuracy at long distances







FULLFIELD II RIFLESCOPE 6.5-20x50mm

ITEM NUMBER: 200193 RETICLE: **BALLISTIC MIL-DOT** MAIN TUBE SIZE: 1 in. ADJUSTABLE PARALLAX:

- High magnification and mil-dot reticle extends long-range shooting capability • 50 mm objective allows maximum light collection
- · Parallax adjustment provides improved accuracy at long distances

50 YDS. TO INFINITY

SERIES FEATURES

- High-grade optical glass provides excellent brightness and clarity with lasting durability
- Quality, precision-ground lenses are larger than those of comparable scopes, allowing for better light collection
- Index-matched, HiLume™ multicoating aids in low-light performance and glare elimination, increasing your success rate
- Low-profile windage and elevation turrets create a sleek profile; indications always reflect a change in the point of impact for pinpoint accuracy

THE MOST DECORATED S 0 PE IN **BURRIS HISTORY**

The Fullfield II is one of the most recognized and awarded scopes in the shooting and hunting industry. Since its introduction in 1975, it has set the standard for accuracy, reliability and affordability. It's still one of our most popular models with a wide selection of magnifications and features

Burris. PREDATOR GUEST®

RIFLESCOPES

FOREVER WARRANTY, NO DUESTIONS ASKED *

Fast-moving camouflaged critters present an even bigger challenge when the light is fading. World Champion coyote caller Les Johnson helped us design this light-gathering scope that quickly compensates for wind and elevation, then eliminates glare and detection for the ultimate advantage.



Er

WATERPROOF

SHOCKPROOF FOGPROOF

OOF NITROGEN-FILLED

N₂

RETICLE

Predator Quest® is a registered trademark of Predator Quest, LLC. Realtree Max-1® is a registered trademark of Jordan Outdoor Enterprises, Ltd.

Ballistic Plex™ E1

PREDATOR QUEST® RIFLESCOPE 4.5-14x42mm

ITEM NUMBERS: 200370, 200371 (Camo finish)

RETICLE: BALLISTIC PLEX E1™

MAIN TUBE SIZE:

ADJUSTABLE SIDE PARALLAX: 50 YDS. TO INFINITY

High magnification extends long-range shooting capability
Ergonomic side focus allows easy-to-reach parallax adjustment
Matte black or Realtree Max-1[®] Camo finishes available





IDEAL FOR PREDATOR HUNTING

Burris teamed up with expert predator hunter Les Johnson to design a line of riflescopes ideal for the special challenges that predators bring.

SERIES FEATURES

- State-of-the-art Ballistic Plex E1 reticle features trajectory compensation out to 500 yards with cascading dots to compensate for crosswinds or moving targets
- Threaded Anti-Reflection Device (ARD) reduces lens glare to prevent detection, and aids in spotting game in the rising or setting sun
- Index matched, HiLume™ multicoating provides low-light performance and glare elimination, increasing your success rate
- Finger-adjustable windage and elevation turrets create a sleek profile; indications always reflect a change in the point of impact for pinpoint accuracy

Burris. DROPTINE RIFLESCOPES

Step into legendary Burris performance with a scope that steps up your game. Our reliable, high-quality glass is glare-resistant and superbly capable in low light, with a shockproof design that gives you the most for your dollar.



WATERPROOF

SHOCKPROOF FOGPROOF

OOF NITROGEN-FILLED

RETICLES

Ballistic Plex[™]

G2B Mil-Dot™

BURRIS OPTIOS 2019

DROPTINE RIFLESCOPE 2-7x35mm

ITEM NUMBERS: 200015, 200016 RETICLE: BALLISTIC PLEXTM

MAIN TUBE SIZE: 1 in.

• 200015 with focus set at 50 yards and calibrated for .22 LR ammo • 200016 with focus set at 75 yards and calibrated for slug guns



23 BURRIS OPTICS 2019

DROPTINE RIFLESCOPE 3-9x40mm

ITEM NUMBERS: 200017, 200019

RETICLE:

• 200017 with focus set at 100 yards for centerfire loads • 200019 with focus set at 50 yards and calibrated for .22 LR ammo

BALLISTIC PLEXTM MAIN TUBE SIZE: 1 in.



DROPTINE RIFLESCOPE 3-9x50mm

ITEM NUMBER: 200049 RETICLE: BALLISTIC PLEXTM MAIN TUBE SIZE: 1 in.

• 50 mm objective allows for maximum light collection





DROPTINE RIFLESCOPE 4.5-14x42mm

ITEM NUMBER: 200077 RETICLE: BALLISTIC PLEXTM ITEM NUMBER: 200078 RETICLE: G2B MIL-DOT™

ADJUSTABLE PARALLAX: MAIN TUBE SIZE: **50 YDS. TO INFINITY** 1 in.



SERIES FEATURES

- High-grade optical glass provides excellent brightness and clarity
- Quality precision-ground lenses are larger than those of comparable scopes for better light transmission
- Index-matched, HiLume™ multicoating aids in low-light performance and glare reduction, increasing your success rate
- Finger-adjustable windage and elevation knobs create a sleek profile; indications always reflect a change in the point of impact for pinpoint accuracy
- Simple, rugged reticles have holdovers for precise shots at extended ranges

SIMPL TOOLS FOR ANY HUNTER

Designed to get the job done in the field. With specific models calibrated for centerfire, slug gun or .22 rifles, there's a Droptine to meet your needs.



Specifically designed to match scout rifles, our slim, compact optics give you low-tomedium magnification, perfect for close- to mid-range targets. Placed well forward on the rifle, you'll get-and keep-both eyes perfectly on targets both moving and still. When that happens, well, we all know what goes down next.



SERIES FEATURES

- For shooters who need a work rifle or fighting carbine and use the multipurpose scout rifle.
- Compact and lightweight, so it's easy to carry your rifle in the field
- Forward mounting design allows mounting in front of the ejection port, for extended eye relief and both-eyes-open shooting with unobstructed access to the cartridge port; beneficial for fast target acquisition and increased situational awareness



Those who love muzzleloaders, slug guns, or hunting with big-bore rifles know a scope can truly bite if you squeeze one off with your face too close to the eyepiece. The compact Timberline provides up to 5 inches of eye relief in an affordable, lightweight platform ideal for all-day grinds through brush and hilly terrain.



SERIES FEATURES

- Compact for easier hunting in mountainous terrain or heavy brush
- Up to 5 inches of eye relief keeps heavy recoiling riflescopes away from your face; perfect for muzzleloaders, slug guns, mountain rifles, and quality rimfire rifles

25

BURRIS OPTICS 201

- Light weight and small size doesn't affect the balance and feel when mounted low on short-action rifles
- Index-matched, HiLume[™] multicoating provides low-light performance and glare elimination

HANDGUN SCOPE 2x20mm ITEM NUMBERS: 200218, 200229

RETICLE: PLEX

MAIN TUBE SIZE:

1 in.

- Most compact and lightweight configuration in the product line
- Available with matte black (200218) or nickel finish (200229)



HANDGUN SCOPE 2-7x32mm

- Variable 2-7x magnification offers greater ITEM NUMBERS: 200279, 200299 RETICLE:
 - field versatility Available with matte black (200279) or
 - nickel finish (200299)
 - Available Posi-Lock[™] system (item 200299) uses a retractable steel post in addition to the springs of a conventional adjustment system, to keep the point of aim firmly locked in place.



200309

RETICLE:

BALLISTIC PLEXT

MAIN TUBE SIZE:

BALLISTIC PLEXTM

200291, 200298

ITEM NUMBERS:

RETICLE: PLEX

HANDGUN SCOPE 3-12x32mm

- ITEM NUMBER: Large magnification extends your long-range shooting capability
 - Parallax adjustment for improved accuracy at any distance

MAIN TUBE SIZE: 1 in.

ADJUSTABLE PARALLAX: **25 YDS. TO INFINITY**





Given handgun hunters employ some seriously impressive cartridges, these durable and reliable scopes are purpose-built with superb recoil absorption and long eye relief appropriate for heavy recoil long range shooting.

Burris

HANDGUN

SCOPES



RETICLES

FOREVER WARRANTY,

* NO QUESTIONS ASKED *

Ballistic Plex™

SERIES FEATURES

- Compact, lightweight scopes with long eye relief create the perfect platform for handgun hunting
- Double internal spring-tension system allows the scope to hold zero through shock, recoil, and vibrations
- Durable, stress-free, solid 1-piece outer tube withstands shock and vibrations of even the heaviest-recoiling calibers
- High-grade optical glass provides excellent brightness and clarity





SPEEDBEAD[™] **SHOTGUN** MOUNTS

No other system exists for mounting a FastFire[™] optic ultra-low and perfectly in line with the natural sighting plane of the shotgun. Improve your speed and accuracy over waterfowl, upland birds, turkeys or clays.



WATERPROOF SHOCKPROOF



FASTFIRE[™] 3 WITH SPEEDBEAD SHOTGUN MOUNT

- Includes both 8-MOA Fastfire 3 red dot sight and SpeedBead Shotgun Mount in one package
- Mounts low between the stock and receiver
- Line of sight falls just above the vented rib for accurate aiming
- 1x magnification allows botheyes-open shooting
- Parallax free, for improved accuracy
- CR-1632 battery with automatic time-out feature lasts up to 5 years
- Compatible with Shotgun Item 300240 Benelli[®] Super Black Eagle II 12 Ga. Benelli® M2, Montefeltro, Ultra Light 300241 Beretta® A400 Xplore 300253 300244 Beretta® Xtrema/2, 391, 391 Light, Urika/2 300245 Reminaton® 870 300248 Remington® 1100, 1187



SPEEDBEAD SHOTGUN MOUNTS


- SpeedBead Shotgun Mount only; FastFire optics sold separately
- Compatible with many popular shotguns
- All SpeedBead Shotgun Mounts are compatible with all FastFire red dot sight models
- Mounts between the stock and receiver

ltem	Compatible with Shotgun
410670	Benelli® Super Black Eagle II
410671	Benelli® Super Black Eagle (original) 12ga
410672	Benelli® M2, 12 Ga., Montefeltro, Ultra Light
410673	Benelli® M1, 12 Ga.
410674	Benelli® Legacy 12 Ga., Sport II, Super Sport, Cordoba
410687	Benelli® M2 20 Ga.
410675	Benelli® SuperNova
410676	Benelli® R1, ARGO
410677	Beretta [®] A400 Xplore
410678	Speed Bead, Beretta Xtrema/2, 391, 391 Light, Urika/2
410679	Franchi® I-12
410680	Remington® 870
410681	Remington [®] 1100, 1187

Windage and elevation adjustments let you fine-tune your aiming point to the center of your shot pattern.

410682 Stoeger® 2000, P-350

SpeedBead mount installs between the buttstock and receiver; works with any shim kit.



Description

ltem

Item

410355 SpeedBead Mount Riser - 1/8 in. 410356 SpeedBead Mount Riser - 1/4 in.

> SpeedBead mount aligns the red dot lower than any other optic on the market for accurate and instinctive shooting.

201

5



The innovative Oracle bow sight is a game changer for bow hunters. It instantly provides exact distance to target and exact aiming point. Built off of a decade of rangefinding and ballistic compensation experience with the Eliminator riflescope. **Eliminate guessing distance.** Built-in rangefinder gives exact distance to the target at full draw. **Eliminate aiming between pins.** Instantly calculates and displays the exact aiming point for any distance and shot angle. **Eliminate aiming with the wrong pin.** The Oracle presents the one and only perfect aiming dot for the exact distance and your exact arrow.

Burris. ORACLE™ BOW SIGHT

FOREVER WARRANTY, NO OUESTIONS ASKED *

Aurris





WATER RESISTANT

HUCKPROOF F

FOGPROOF NITROGEN-FILLED

ORACLE RANGEFINDING BOW SIGHT

ITEM NUMBERS: NEW 300400

- All Aluminum Construction
- Locking Micro Adjustment Knobs
- Increase shooting distances out to 80 110 yards
- Accommodates up to 176 MOA (184 inches of drop at 100 yards.)
- Stores two different trajectory curves for different arrows or draw weights
- Right or Left-hand compatible
- Rear Peep Improves Shot Accuracy and Consistency
- 2nd and 3rd Axis Adjustments
- Water Resistant





HOW IT WORKS

- 1 Just sight in at 20 yards and two farther distances and the Oracle learns your entire trajectory curve.
- 2 A rangefinder measures the exact distance to your target while at full draw.
- 3 The Oracle instantly calculates the perfect trajectory compensation for the distance and shot angle.
- **4** The sight displays exact aiming point for your shot.

EASY PUSH-BUTTON ACTIVATION

ORACLE FEATURES

- No glass to glare, scratch or fog for any conditions. Don't let your trophy of a lifetime walk away because you couldn't see clearly through your sight
- Built in fixed 20-yard pin to give you supreme confidence that you will always have a pin to reference, no matter what
- Sighting in the Oracle is fast and precise with micro adjustment knobs that lock down rock solid
- Compatible with arrow speeds from 200- 420 fps
- Right and Left-hand compatible


Activate sight at full draw!

Burris BINOCULARS SIGNATURE HD & DROPTINE

FOREVER WARRANTY

2017 BEST BUY

Hunters have trusted Burris optics for over 40 years and the new Droptine and Signature binoculars continue the tradition of reliability, affordability and performance. Versatile enough for any style of hunting, they are big on performance but won't slow you down.



WATERPROOF SHOCKPROOF

3

FOGPROOF NITROGEN-FILLED


SIGNATURE HD BINOCULARS 8x42mm

ITEM NUMBER: 300292

 8x magnification and HD glass for optimal light transmission and true color fidelity

SIGNATURE HD BINOCULARS 10x42mm

ITEM NUMBER: **300293**• 10x magnification brings the minute details into focus without additional weight and bulk.



- ITEM NUMBER: 4300294
 - 12x magnification is the best choice for wide open country and terrain and larger 50mm objectives offer better detail in low light



SIGNATURE HD SERIES FEATURES

- High-performance HD lenses and BaK-4 prisms produce sharper images and edge-to-edge clarity
- Open bridge design reduces weight and is comfortable to hold
- Nitrogen filled for waterproof and fogproof performance in harsh weather conditions
- Robust aluminum eyecups for extreme ruggedness

DROPTINE BINOCULARS 8x42mm

- ITEM NUMBERS: 300290
- 8x magnification provides detail and a wide field-of-view
 Full size performance in compact, light-weight package

DROPTINE BINOCULARS 10x42mm

ITEM NUMBERS: 010x magnification is ideal for scouting eastern whitetail or western mule deer

DROPTINE SERIES FEATURES

- BaK-4 prisms and fully multi-coated lenses for maximum light transmission and reduced glare.
- Nitrogen filled for waterproof and fogproof performance in harsh weather conditions
- All Burris binoculars include a durable carrying case and neoprene neck strap for all-day comfort
- Robust aluminum eyecups for extreme ruggedness








X50mm

Burris **SPOTTER**





SPOTTER SIGNATURE HD 20-60x85mm

- ITEM NUMBER: 300102 • Built-in sun shade reduces glare and protects the objective lens from rain and snow
- Both coarse and fine focusing adjustment are possible with the forward mounted focus knob NEW 626205
 - Eyecup can be adjusted to accommodate eyeglasses
 - Lightweight, durable design with a die-cast magnesium body that is armored for greater protection in the field
 - Angled eyepiece and rotating tripod mount makes it easy to use whether you're standing or prone

30x WIDE ANGLE EYEPIECE

ITEM NUMBER: 626200

HARD CASE

ITEM NUMBER

ITEM NUMBER : ITEM NUMBER · 626201 626202 RETICLE: RETICLE: SCR MOA SCR MIL

- An optional fixed power 30x eyepiece provides even more range, detail and a wide field-of-view
- Available with your reticle choice of a SCR Mil and SCR MOA
- Easy to install



RETICLES

SCR™ MOA

SCR™ MIL



Take glassing to a higher level with Burris' Signature HD Spotting Scope. With a 20-60x magnification range, you can save time and boot leather by finding and evaluating trophy animals from a mountain away. The HD lenses and apochromatic lens system eliminate color fringing and deliver superb edge-toedge resolution.





NITROGEN-FILLED

SERIES FEATURES

- Premium HD glass for optimum resolution and maximum light transmission under any lighting condition
- The index-matched lenses eliminate color aberrations and produce true color fidelity across the visible light spectrum
- Nitrogen gas purging ensures waterproof, fog proof performance under extreme temperatures

Two integrated mounts on the Spotter Signature HD will accept a FastFire 3 red dot sight for fast, easy, aiming and target acquisition



FOREVER WARRANTY, NO QUESTIONS ASKED *

WATERPROOF

SHOCKPROOF

FOGPROOF



TACTICAL PRODUCT

WHEN THERE'S FAR TOO MUCH ON THE LINE

Whether it's in the face of a threat or in heated competition, no tolerance exists for failure. There's far too much on the line, and that requires unfailing certainty and faith that your optics will help you perform and prevail when it's go time. Knowing you—and we—have done everything in our power to help that shot find its mark is what matters above all, and that starts with the name you'll see right there on your scope. That name is Burris.



+ ★ ★ + FOREVER WARRANTY, HO OUESTIONS ASKED + HO OUESTIONS ASKED + HO OUESTIONS ASKED +

A Colorado original. The Burris XTR III is engineered, designed and assembled out West where distance is measure in hours instead of yards. This next generation long-range competition puts you on target at extreme ranges with Best-In-Class features such as an industry best field of view, 5x plus zoom range, choice of three front focal plane reticles, race dial options and more.





N₂)

SHOCKPROOF


FOGPROOF NITROGEN-FILLED

RETICLES

Burris.

XTR III

RIFLESCOPE



XTR III RIFLESCOPE 5.5-30x56mm

ITEM NUMBER:	ITEM NUMBER:
NEW 201210	NEW 201211
(Non-Illuminated)	(Non-Illuminated)
RETICLE:	RETICLE:
SCR MIL	SCR MOA

red) ITEM NUMBER: NEW 201212 (Non-Illuminated) RETICLE:

SCR2 MIL

 At 30x this new optical system provides greater depth of field, sharper images, better resolution and larger eye box than competitive scopes

• 56mm front objective delivers brighter images at high magnification under any light condition



MAIN TUBE SIZE: 34 MM

XTR III RIFLESCOPE 3.3-18x50mm

ITEM NUMBER:	ITEM NUMBER: NEW 201201	ITEM NUMBER: NEW 201202
(Non-Illuminated)	(Non-Illuminated)	(Non-Illuminated)
RETICLE:	RETICLE:	RETICLE:
SCR MIL	SCR MOA	SCR2 MIL

MAIN TUBE SIZE: 34 MM



Proudly designed, machined and assembled in the USA.

SERIES FEATURES

- 34mm Body tube for extended adjustment range
- 5x+ Zoom with 150° power ring rotation
- Improved optical system with a larger field of view, smaller eyepiece signature and generous eye box at all magnifications
- Oversize tactical knobs with a Race Dial option for PRS and NRL style shooting
- Three reticle options in MIL or MOA
- Zero click stop for dependability

• Choose from three reticles to match your shooting style. With over120 MOA in elevation adjustment, it will reach out past a mile with the 6.5 Creedmoor

 The shorter overall length balances well with any shooting platform



DESIGNED, ENGINEERED AND BUILT IN COLDRADD


Built for competitors by competitors. With input from our pro staff, these scopes meet the high standards and demands of long-range shooters. Proudly designed, engineered and built in Colorado, where Burris has been building scopes for over 40 years.



★★★★ FOREVER WARRANTY, WAY NO OUESTIONS ASKED ★ WAY NO OUESTIONS ASKED ★ WAY AND OUESTIONS ASKED ★

It comes down to a matter of inches when a door blows open and you've got less that a second to clear a room. This is no time for chance. It's time to put absolute confidence in yourself and the crystal clear, low-magnification performance of your scope to get you out of harm's way.





WATERPROOF

SHOCKPROOF FOGPROOF

N₂

XTR II RIFLESCOPE 1-8x24mm

ITEM NUMBER: 201018 (M.A.D.) ITEM NUMBER: 201019 (M.A.D.)

RETICLE: BALLISTIC CIRCLE DOT™ (FFP)

RETICLE: BALLISTIC DOT™ (RFP)



MAIN TUBE SIZE: 34 MM

XTR II RIFLESCOPE 2-10x42mm

ITEM NUMBER: 201023 RETICLE: G2B MIL-DOT™ • Versatile, low-magnification scope lets you easily transition from CQB to mid-range shooting with accuracy



MAIN TUBE SIZE: 34 MM

ADJUSTABLE SIDE PARALLAX: **50 YDS. TO INFINITY**

ITEM NUMBER: 201022

SCRTM MOA

RETICLE:

XTR II RIFLESCOPE 3-15x50mm

201031

201034

RETICIE SCR™ MIL

ITEM NUMBER: 201033 RETICLE: G2B MIL-DOT™

ITEM NUMBER: ITEM NUMBER 201032 RETICLE: (Non-Illuminated) SCRTM MOA

• Versatile, combat-proven platform is ideal for mid- to long-range shooting



MAIN TUBE SIZE: ADJUSTABLE SIDE PARALLAX: **50 YDS. TO INFINITY** 34 MM

SERIES FEATURES

- Versatile 5x or new 8x zoom system creates a large field of view at close ranges and excellent target acquisition at longer ranges
- Dimensionally matched, single-turn windage and elevation knobs have a 1/10-mil click value adjustment and Zero Click Stop
- Rear, Front, and Dual Focal Plane reticle designs allow for fast target acquisition and maximum accuracy
- Feature the Modular Adjustment Dial (M.A.D.) System providing more accessibility and customization to windage and elevation knobs and settings

11 SETTINGS

Eleven illuminated brightness settings span night vision, low light, and daytime visibility, with a convenient battery-saver position between each setting.

Burris XTR II RIFLESCOPES

***** FOREVER WARRANTY

Those of us whose realities live in the 1,000-plus-yard realm know the difference between success and failure grows exponentially with every foot. Features like the 5x Zoom System and Zero Click Stop Adjustment Knobs-among many moreallow for an epic level of shot control at distances mere mortals only dream of covering accurately.

Burris

38

2019

BURRIS OPTICS










RETICLES



SHOCKPROOF

FOGPROOF NITROGEN-FILLED

XTR II RIFLESCOPE 4-20x50mm

	ITEM NUMBER: 201044 RETICLE: G2B MIL-DOT™	ITEM NUMBER: 201041 RETICLE: HORUS [®] H591™	ITEM NUMBER: 201042 201045 (Non-Illuminated) RETICLE: SCR™ MIL	ITEM NUMBER: 201043 RETICLE: SCR™ MOA	 Popular magnification is ideal for mid- to long-range precision shooting 	
--	--	--	---	--	--	--

MAIN TUBE SIZE: 34 MM ADJUSTABLE SIDE PARALLAX: 50 YDS. TO INFINITY

XTR II RIFLESCOPE 5-25x50mm

	RETICLE: SCR™ MIL		
ITEM NUMBER: 201053 RETICLE: G2B MIL-DOT™	ITEM NUMBER: 201051 201056 (Flat Dark Earth) 201054 (Non-Illuminated)	ITEM NUMBER: 201052 RETICLE: SCR™ MOA	

• Popular magnification range is ideal

for long-range precision shooting

MAIN TUBE SIZE: 34 MM ADJUSTABLE SIDE PARALLAX: 50 YDS. TO INFINITY

XTR II RIFLESCOPE 8-40x50mm

ITEM NUMBER: 201080	ITEM NUMBER: NEW 201081	 High magnification is ideal for extreme long-range shooting Features XT-80 click adjustment knob, with 80 clicks per rotation
Reticle: F-Class Moa	RETICLE: F-CLASS DCH	

MAIN TUBE SIZE: 34 MM ADJUSTABLE SIDE PARALLAX: 50 YDS. TO INFINITY

SERIES FEATURES

- Versatile 5x zoom system creates a large field of view at close ranges and excellent target acquisition at long ranges
- Zero Click Stop adjustment knobs let you quickly and easily revert back to the original zero setting without counting clicks
- XT-100 click adjustment knobs, with 10 mils or 25 MOA of adjustment per rotation, can take most tactical calibers out past 1,000 yards in a single turn

FO RETICLE DESIGN

Front focal plane reticle design allows the reticle size to increase or decrease as magnification is increased or decreased; trajectory compensation and reticle measurements are always correct and proportional for the selected power setting.









Burris MTAC. RIFLESCOPES

* Shown with combo kit see page 45

> *** FOREVER WARRANTY ASSA COLLE


Wins in competitive shooting don't have to come with a four-figure price tag. Tough, sleek, snag-free, they're built for consistent, mid-distance, repeatable shooting with an unmatched level of features and comfort that add up to an extreme value in versatility.

BURRIS OPTICS





FOGPROOF NITROGEN-FILLED RETICLES



Ballistic AR™

MTAC RIFLESCOPE 1-4x24mm

ITEM NUMBERS: 200437, 200437-FF (COMBO)

RETICLE: BALLISTIC CQ™


MAIN TUBE SIZE: 30 mm 200465 (BLACKOUT)

> RETICLE: BALLISTIC AR™

ITEM NUMBERS:

200426, 200426-FF (COMBO)

- big-game stalking • Available combo is a complete shooting platform at significant savings: MTAC 1-4x24mm riflescope, 3-MOA FastFire™ 3 red dot
 - savings: MIAC 1-4x24mm riflescope, 3-MOA rastFire 3 sight, and 30 mm AR-P.E.P.R.™ Mount







ITEM NUMBER: 200429 RETICLE: BALLISTIC CQ™ ITEM NUMBER: 200439 RETICLE: BALLISTIC AR™

• Compact model is perfect for 3-gun, close-quarter battle (CQB), or big-game stalking



MAIN TUBE SIZE: 30 mm

SERIES FEATURES

- Ideal platform for competitive shooters, especially 3-Gun enthusiasts
- Generous eye relief up to 4 inches for comfortable shooting
- Index-matched, HiLume™ multicoating aids in low-light performance and glare reduction, increasing your success rate

STAY HIDDEN IN THE SHADDWS. DR STAND DUT

The MTAC Series let you add some color and texture to your favorite AR platform. Available in Prym1 Blackout and Sandstorm camo patterns, as well as matte black. Pick pattern or color that matches your style.

Burris. RT-6 RIFLESCOPE



RT-6 RIFLESCOPE 1-6x24mm

 ITEM NUMBERS:
 RETICLE:

 200472,
 BALLISTIC AR™

 200475 (COMBO)

- Illuminated reticle with 11 levels of illumination
- Integrated adjustable throw lever
- Available in matte black

MAIN TUBE SIZE: 30 mm

FOREVER WARRANTY, NO OUESTIONS ASKED *

WATERPROOF

SHOCKPROOF

FOGPROOF

Speed reigns supreme in three-gun competition. So if you want to compete, you better be fast on the target and fast to shoot. Race inspired and tactical strong, the RT-6™ is guaranteed to shave seconds off the clock.

SERIES FEATURES

N₂

NITROGEN-FILLED

- Shorter than most 1-4x scopes for quicker, easier handling
- A 6x zoom with true 1x low power (optional) setting for both eyes open engagement.
- Ballistic AR[™] mil reticle with trajectory compensation out to 600 yards
- Patented integrated adjustable throw lever can be loacted throughout the circumference and for and aft for your customized perfect location

RETICLES



Everything you need to outfit your AR, at a significant savings. You'll get highquality sights, mounts, and the legendary Burris technology, alongside the peace of mind that comes from knowing each component is perfectly matched.





FOGPROOF NITROGEN-FILLED



Burris. **QUARTERS** TACTICAL KITS



Burris CLOSE-QUARTERS TACTICAL KITS



RT-6 RIFLESCOPE 1-6x24mm

ITEM NUMBERS: 200475 RETICLE:

BALLISTIC ARTM

MAIN TUBE SIZE: 30 mm

- Illuminated reticle with 11 levels of illumination
- Integrated adjustable throw lever
- Available in matte black
- Includes: RT-6 Riflescope 1-6x24mm, 3-MOA FastFire[™] 3 red dot sight, 30 mm AR-P.E.P.R.[™] mount

RETICLES



Ballistic AR™

+++++

FOREVER WARRANTY



MTAC[™] RIFLESCOPE 1-4x24mm

ITEM NUMBER: 200437-FF	
RETICLE: BALLISTIC CQ™	

 ITEM NUMBER:
 ● Ideal

 200426-FF
 ● Gene

 RETICLE:
 ● Incluce

 BALLISTIC AR™
 ● Incluce

Ideal platform for competitive shooters, especially 3-gun enthusiasts
Generous eye relief up to 4 inches for comfortable shooting
Includes: MTAC 1-4x24mm riflescope, 3-MOA FastFire 3 red dot sight, and 30 mm AR-P.E.P.R. Mount

MAIN TUBE SIZE: 30 mm



FULLFIELD TAC30[™] RIFLESCOPE 1-4x24mm

RETICLE:

BALLISTIC CQTM

ITEM NUMBER: 200433-FF Fast-action combo designed for competitive shooters and law enforcement and military operators
Includes: Fullfield TAC30 1-4x24mm, 3-MOA FastFire 3 red dot sight, and 30 mm AR-P.E.P.R. Mount
Also available as optic only; item 200433

MAIN TUBE SIZE: 30 mm

SERIES FEATURES

- Ideal for the first-time competitive shooter, or as an equipment upgrade for the experienced tactical operator
- All primary optics feature illuminated reticles, which reduces time to get on target in any lighting condition and increases accuracy when the target is dark
- Tactical kits mount on any Picatinny-style rail
- Products can be used together or individually to match your needs

THE ULTIMATE IN PLUG AND PLAY DPTICS

These time-and money-saving kits are ready for the range right out of the box. They include a primary low-magnification optic, secondary FastFire red dot sight and rugged AR-P.E.P.R. Mount.



Burris **RIFLESCOPE**[™]



AR RIFLESCOPE 4.5-14x42mm

ITEM NUMBERS: RETICLE: 200333 (5.56 Caliber) 200334 (7.62 Caliber)

WINDMAP

MAIN TUBE SIZE: C4 WIND MOA™ 1 in.

WINDMAP

ADJUSTABLE PARALLAX: **50 YDS. TO INFINITY**

• Custom tactical riflescope at an affordable price

• Ships with custom knob calibrated for either 5.56 or 7.62, to match the most popular tactical cartridges

• Receive one additional free custom elevation knobs when you submit ammunition information online

• Finger-adjustable windage and elevation turrets create a sleek profile; indications always reflect a change in the point of impact for pinpoint accuracy





With C4 technology, you see your target and windage compensating reticle with your right eye. simply refocus to your left eye and you can easily see the WindMap.

Trajectory compensation is a critical component for accuracy at distance. The AR Riflescopes Series has adjustment knobs calibrated for holdover to match an AR's most commonly fired rounds: the 5.56 mm (.223) and 7.62 mm (.308) rounds. Custom AR scopes durably built for ultra-accuracy-with everything except the custom scope price.

SERIES FEATURES

- Match elevation adjustment to your ammunition using the customized adjustment knob
- Automatically compensates for bullet drop when you dial in yardage-to-target; no need for holdover
- WindMap[™] helps you determine wind hold-off for your exact cartridge
- The C4 Wind MOA[™] reticle has 1-MOA tick marks up to 10 MOA on each side of the reticle so you can easily compensate for wind.
- Threaded Anti-Reflection Device (ARD) reduces lens glare for greater concealment to prevent detection

C4 Wind MOA™

RETICLE

***** FOREVER WARRANTY, NO QUESTIONS ASKED *



WATERPROOF

SHOCKPROOF

NITROGEN-FILLED FOGPROOF

N₂)





MSR RIFLESCOPE 3-9x40mm

TEM NUMBERS:	RETICLE:	
200137	BALLISTIC	PLEX™

MAIN TUBE SIZE: 1 in.

- Low-profile elevation knob with visible quarter-MOA clicks
- Available with reticle calibrated for .223 for greater accuracy with popular tactical ammunition



MSR RIFLESCOPE 4.5-14x42mm RETICLE:

- MAIN TUBE SIZE: **BALLISTIC PLEX™** 1 in.
- ADJUSTABLE PARALLAX: **50 YDS. TO INFINITY**
- High magnification extends your long-range shooting capability
- · Parallax adjustment for improved accuracy at long distances



The Ballistic Plex reticle is calibrated to match popular .223 factory loads. It will match most distances within a few yards. For the most accurate calibration, visit the Ballistic Service page of the Burris website (http://ballistics.burrisoptics.com/).

Get into the black gun world with a scope that gets both you and your dollar farther from the start. Reliable, precision-ground, glare-resistant glass, tough, shockproof design, and simple, elegant, trajectory-compensating reticle that can be matched to any caliber or bullet weight. And that's just the beginning.





FOGPROOF NITROGEN-FILLED

SERIES FEATURES

- Designed for shooters new to tactical rifles, who are ready for an affordable custom tactical riflescope
- High-grade optical glass provides excellent brightness and clarity with lasting durability
- Index-matched, HiLume[™] multicoating aids in low-light performance and glare elimination, increasing your success rate
- Finger-adjustable windage and elevation turrets create a sleek profile; indications always reflect a change in the point of impact, for pinpoint accuracy



T.M.P.R. COMPONENTS

T.M.P.R. Power Sharing Connectors



T.M.P.R. FASTFIRE M3

DOT SIZE:

3 MOA

- ITEM NUMBERS: Compatible with the T.M.P.R. Prism Sights allowing for it to use the larger sight's battery instead of relying on its own battery power
 - Automatic brightness sensor adjusts brightness to match the environmental conditions; also has 3 manual brightness settings
 - Battery access is conveniently located on the top of the sight; automatic time-out feature after 8 hours helps battery last up to 5 years



T.M.P.R. LASER SIGHT

ITEM NUMBERS: • Red Laser 300221

- Compatible with the T.M.P.R. Prism Sights allowing for it to use the larger sight's battery instead of relying on its own battery power
- Perfect for low-light fast-action tactical shooting and home defense

The T.M.P.R. SYSTEM is a modular system of purpose-specific optics that can be used individually or in combination to create the ultimate sight for any situation. Each T.M.P.R. System component has its own battery. When connected to a T.M.P.R. prism sight, they can be powered by the prism sight's high-capacity CR123 battery.

48





WATERPROOF SHOCKPROOF

FOGPROOF

NITROGEN-FILLED

T.M.P.R. PRISM SIGHTS

T.M.P.R. 3 3x32mm

ITEM NUMBERS: 300224 300228 (COMBO)

RETICLE: BALLISTIC 3X™

- Compact, 3x prism sight offers fast target acquisition
- Illuminated Ballistic 3X reticle
- Quick detach QD Mount
- Red, Green and Blue illumination





TMPR Components can be attached on top, left or right side of the prism sight. Simply remove any of the three panels to attach the M3 or Laser Sight. Power connector points provide shared power from prism sight's main battery.



T.M.P.R. 5 5x32mm

ITEM NUMBERS: 300226 300229 (COMBO)

RETICLE: BALLISTIC AR™

- 5x magnification for long-range target engagement
 Illuminated Ballistic AR reticle
- Quick detach QD Mount
- Red, Green and Blue illumination

**** FOREVER WARRANTY, You ouestions asked * UND アモデマティー

SERIES FEATURES

- Shares power with T.M.P.R. components: T.M.P.R. FastFire M3 and the T.M.P.R. Laser Sight (both sold separately)
- Ballistic reticle with 7 illumination levels and three colors
- Night Vision Compatible 2 night vision settings and 3 colors for 6 NV settings
- Circular reticle provides ultra-fast engagement at close distances
- Trajectory compensation out to 600 yards

POWER SHARING CONNECTORS

The T.M.P.R. FastFire M3 and the T.M.P.R. Laser Sight have tiny power connectors at their base allowing them to share the power of the T.M.P.R. Prism Sight.






TIT

+ ★ ★ + FOREVER WARRANTY, NO OUESTIONS ASKED + HOLD TEST CELLULE

Made specifically for close-quarter engagement with an AR, these compact prism sights allow for nanosecond target acquisition in the lowest-light scenarios. When it's go-time, the variety of magnifications ensures lawmen, military and competitive shooters can accurately cover any distance.







Red, green, or reverts to black when battery is off.

WATERPROOF SHOCKPROOF

FOGPROOF

NITROGEN-FILLED

 (N_2)

······

Rollictic AD



• Fixed 3x magnification with a 32 mm objective

• 3 reticle color settings: red, green, and black

• Available tactical kit includes AR-332 optic,

Device, and rugged, reusable carry case

3-MOA FastFire[™] 3 red dot sight, Anti-Reflection

• 5 red and 5 green illuminated settings

AR-332™

ITEM NUMBERS: 300208 300222 (KIT)

RETICLE: BALLISTIC CQ™

ITEM NUMBER: 300217

RETICLE **BALLISTIC 3X**



AR-TRIPLER[™]

ITEM NUMBER: 300213

- Adds 3x magnification to any 1x or non-magnified optic
- Windage and elevation adjustments allow complete use of reticle images on partner optics

ITEM NUMBER: 300216 (COMBO)

- Available combo includes AR-Tripler and AR-Pivot Ring[™] Quick Detach
- Lets you transition between close-quarter and mid-distance shooting without swapping weapons or optics
- · Pivot ring lets it easily flip to the side with the push of a button, to switch from 3x to 1x shooting



AR-536™ ITEM NUMBERS:

300210 300223 (KIT)

BALLISTIC CQ™

ITEM NUMBER:

BALLISTIC AR

QUICK DETACH, 30 mm

• Lets you quickly and easily mount the AR-

Tripler in-line behind non-magnified objects

• Flips to the side with the push of a button for

1x shooting; manually pushes back into the

• Installation and removal is easy with the quick-

Automatically locks into place for secure

upright position for longer shots

RETICLE:

300218

RETICLE

AR-PIVOT RING^T

ITEM NUMBER:

shooting

detachable mount

420168

- Fixed 5x magnification with a 36 mm objective
 - 3 reticle color settings: red, green, and black
 - 5 red and 5 green illuminated settings
 - Available tactical kit includes AR-536 optic, 3-MOA FastFire™ 3 red dot sight, Anti-Reflection Device, and rugged, reusable carry case



ITEM NUMBER: • For use with Burris AR-536 and 410351 AR-332

- Locking quick-detach design is strong and allows for easy detachment
- Dependable, return-to-zero reliability



Fixed 1x magnification with a 20 mm objective

• 3 reticle color settings: red, green, and black

• 7 red and 7 green illuminated settings with push-button activation

- Night vision compatible
- 5,000+ hours of battery life with one lithium AA battery
- Available tactical kit includes AR-1X optic, AR-Tripler[™], and AR-Pivot Ring[™], Quick Detach



ANTI-REFLECTION DEVICE

- ITEM NUMBERS: 626004 626005
- Threaded anti-reflection devices (ARDs) reduce lens glare and provide greater concealment to prevent detection
- Available to fit AR-332 (626004) or AR-536 (626005)

SERIES FEATURES

- Made for competitive shooters, law enforcement personnel, and military operators
- Provides additional range from a compact, fast-acquisition optic
- Rugged construction withstands recoil, abuse and all types of weather
- Includes lens covers to protect from dirt and debris

The AR-332/AR-536 are available in combo kits that have everything you need for a complete set up: a rugged optic, FastFire 3™ 3-MOA red dot sight, antireflection device and rugged, reusable carry case.

AR-1X[™]

ITEM NUMBERS:

300214 300219 (KIT)

BALLISTIC CQ™-1X


RETICLE:











The FastFire puts an unmistakable, bright red dot on your target giving you an immediate speed and accuracy advantage. Perfect as a primary sight or paired on top of an existing sight.

WATERPROOF



52



FASTFIRE 2

ITEM NUMBERS: 300232, 300233

DOT SIZE: 4 MOA Automatic brightness sensor adjusts brightness to match the environmental conditions

Surris

- Available with Picatinny/Weaver mount for mounting on rifles, handguns and tactical shotguns
- Black hood, when installed, puts unit into sleep mode

SERIES FEATURES

- Bright red dot allows for fast target acquisition and easy aiming
- 1x magnification allows for both-eyes-open shooting, for enhanced awareness and target acquisition
- Parallax-free, for better accuracy





FASTFIRE 3

- ITEM NUMBERS: 300234, 300235 DOT SIZE: 3 MOA ITEM NUMBERS: 300236, 300237 DOT SIZE: 8 MOA
- Automatic brightness sensor adjusts brightness to match the environmental conditions; also has 3 manual brightness settings
 - Battery access is conveniently located on the top of the sight; automatic time-out feature after 8 hours helps battery last up to 5 years
 - Available with Picatinny/Weaver mount for mounting on rifles, handguns and tactical shotguns





AR-F3™

DOT SIZE:

3 MOA

- ITEM NUMBER:
 • Product includes AR-F3 tactical mount and 3-MOA FastFire 3 red dot sight
 - Positions the FastFire at the optimum height on an AR as a standalone sight and as a co-witness for iron sights
 - Sight is protected by metal wings on each side
 - \bullet Has convenient storage space for spare battery, open-end wrench, and $\text{Torx}^{\circledast}$ wrench
 - Fits any Weaver or Picatinny-style base

MOUNTS

FASTFIRE MOUNTS

ltern	Mount
410321	1911 Standard
410322	1911 Adjustable/Novak
410323	Kimber® Standard/Target/Bomar
410324	Beretta® 92 & 96/90Two/Cougar/Taurus PT99
410319	Glock 45 ACP & 10mm, + PX4 Storm
410327	Sig Sauer® P226
410328	Springfield XD®
410336	Smith & Wesson® M&P®
410318	Ruger American Pistol
410329	Ruger® Mark I, II, III
410332	Ruger® M77, No. 1, Super Redhawk, Super Blackhawk Hunter
410333	Marlin® 336, 444, 1895 (Pre-drilled and tapped)
410334	Winchester® M94 (Pre-drilled and tapped)
410335	Picatinny/Weaver
410635	Sako® Rifles (Requires Picatinny Mount # 410335)

Mounts to almost anything—including handguns, rifles and shotguns—and the shockproof design stands up to years of punishing recoil

• Windage and elevation adjustments make fine-tuning easy



AR-F3[™] MOUNT

ITEM NUMBER: 410348

- Simplest, most effective way to mount any FastFire sight on an AR flattop
- Allows the FastFire to mount at the optimum height, so the red dot can co-witness with iron sights
- Fits Weaver or Picatinny-style base
- Metal wings protect the lens from impact and unintentional abuse
- Lower compartment stores spare battery, open-end wrench, and Torx[®] wrench

SCOPE TUBE FASTFIRE[™] MOUNTS

ITEM NUMBERS: 410337, 410338, 410339

- Positions a FastFire sight in nearly any radial position on a primary optic
- Allows primary optic to remain at a higher magnification as you quickly switch to a FastFire sight for ultra-fast, closequarter target engagement

PICATINNY PROTECTOR MOUNT

ITEM NUMBER: 410330

- Protects any FastFire sight from impact or abuse
- Use when mounting a FastFire on pistols, rifles or shotguns, for extra protection and peace of mind
- Fits Weaver or Picatinny-style base

- Complements a high-power primary optic for long-range target acquisition and weapon alignment
- Available in 1 in., 30 mm, or 34 mm





RINGS, MOUNTS, RETICLES AND ACCESSORIES

> SOLID FOUNDATION FOR SUCCESS

Burris has built a reputation for some of the most solid, reliable rings and bases on the market. Our quality rings, mounts and accessories create the perfect shooting solution. You'll stay on target round after round with gear from Burris.



Burris. RINGS & MOUNTS

Hunters and tactical shooters count on Burris mounting solutions, with a wide variety of options that securely mount a riflescope onto any Weaver or Picatinny-style rail. These rings and bases provide long-lasting holding power and durability for hunters, duty officers and competitive shooters.

NEW AR-SIGNATURE QD[™] P.E.P.R.[™] MOUNTS

• The new streamlined design with QD mount insures ¹/₄ MOA re-mount capability and allows for use of back up iron sights while maintaining proper eye-relief. Available in 30-, 34- and 35-mm options with Burris' Signature polymer ring inserts, it provides adjustment from 5 to 40 MOA without using windage/elevation knobs.




D





AR-P.E.P.R.™ MOUNTS

- Full ring and base mounting solution in one
- Allows up to 2 inches of forward scope positioning
- Provides optimum eye relief and full field of view
- Includes both smooth and Picatinny ring tops
- Quick-detach models allow for fast mounting



				Dimensions						
	Item	Size	Weight	A	В	С	D	E	QD MOUNT	CANT
	410341	30 mm	8.7 oz.	1.00 in.	1.75 in.	1.60 in.	4.15 in.	2.15 in.		0 MOA
	410342	30 mm	8.7 oz.	1.00 in.	1.75 in.	1.60 in.	4.15 in.	2.15 in.	•	0 MOA
	410343	1 in.	8.3 oz.	1.00 in.	1.57 in.	1.50 in.	4.15 in.	2.15 in.		0 MOA
	410344	1 in.	8.3 oz.	1.00 in.	1.57 in.	1.50 in.	4.15 in.	2.15 in.	•	0 MOA
	410345	34 mm	6.9 oz.	0.68 in.	1.90 in.	1.35 in.	4.90 in.	2.90 in.		20 MOA





			Dimensions						
ltem	Size	Weight	А	В	С	D	E	F	QD MOUNT
410352	30 mm	10.33 oz.	.81 in.	2.13 in.	1.5 in.	5.0 in.	3.0 in.	3.45 in.	•
410353	34 mm	10.09 oz.	.76 in.	2.28 in.	1.5 in.	5.0 in.	3.0 in.	3.45 in.	•
410354	35 mm	10.09 oz.	.76 in.	2.28 in.	1.5 in.	5.0 in.	3.0 in.	3.45 in.	•

AR-P.E.P.R. Quick-Detach Model

XTR RINGS™

- 1 in. and 30 mm models are lightweight aluminum with incredible holding power
- Quick-detach models allow fast mounting
- 34 mm models are all steel, to handle the largest scopes

ltem	Size	Quick-Detach	Aluminum	Steel	1 Ring	2-Ring Set
Low						
420160	30 mm		•			•
420161	30 mm		•		•	
420180	1 in.		•			•
Medium						
420157	30 mm	•	•			•
420162	30 mm		•			•
420163	30 mm		•		•	
420181	1 in.		•			•
420185	1 in.	•	•			•
420190 – 2 Wide Rings	34 mm			•		•
420191 – 1 Thin, 1 Wide Ring	34 mm			•		•
High						
420164	30 mm		•			•
420165	30 mm		•		•	
420182	1 in.		•			•
Extra-High						
420159	30 mm	•	•			•
420166	30 mm		•			•
420167	30 mm		= •		•	
420183	1 in.		•			•
420187	1 in.	•	•			•
420192 – 2 Wide Rings	34 mm			•		•
420193 – 1 Thin, 1 Wide Ring	34 mm			•		•
Picatinny Ring Top	o - allows atta	chment of acc	essories on top	o of mounted s	cope	
420189	1 in.		•		•	

RING HEIGHTS

30 mm

420169

These are the dimensions of Xtreme To	actical Rings, from
the center of the scope to the top of the	ne mount base.

	Low	Medium	High	Extra-High
30 mm	0.85 in.	1.10 in.	1.35 in.	1.60 in.
1 in.	0.75 in.	1.00 in.	1.25 in.	1.50 in.
34 mm		1.00 in.		1.50 in.





Low

Extra-High



34 mm Steel Wide Ring



34 mm Steel Thin Ring



Picatinny Ring Top





Pos-Align® Offset Inserts

XTR SIGNATURE RINGS™


- Provide precision customization of cant to maximize usable elevation adjustment of the scope. Included inserts allow for 5, 10, 15, 20, 25, 30 and 40 MOA of cant
- Provide 100% scope-to-ring contact, eliminating the need to lap rings while providing tremendous gripping power without leaving ring marks
- Strong, lightweight aluminum rings feature solid steel dual screw clamps that insure each ring
 mounts flat and centered on any Picatinny base
- Includes the following Pos-Align® Offset Inserts: Concentric (Zero MOA), +/-5 MOA, +/-10 MOA, and +/-20 MOA (2 sets)

RING HEIGHTS

High

These are the dimensions of XTR Signature Rings, from the center of the scope to the top of the mount base.

ltem	Height	Size	ltem	Height	Size
420210	1.00 in.	34 mm	420223	1.50 in.	30 mm
420211	1.50 in.	34 mm	420231	1.00 in.	1 in.
420221	1.00 in.	30 mm	420232	1.25 in.	1 in.
420222	1.25 in.	30 mm	420233	1.50 in.	1 in.



Length

3.5 in.

Lengt

1.5 in.

AR-T.E.R. EXTENSION RINGS

- Great for mounting a red dot sight ahead of the AR-Tripler[™]
- Milled from one piece of aluminum alloy, for increased strength
 - Quick-detach lever for easy attachment and removal

ltem	Height	Optic Centerline Height
420188	2.6 in.	1.50 in.

1/2-INCH PICATINNY RISER

- Provides 1/2 inch of additional mounting height for optimal sight alignment on tactical platforms
 - Height 0.5 in.

410340



SIGNATURE RINGS

- Revolutionary Pos-Align® Inserts technology
- · Pos-Align Inserts guarantee perfect centering and maximum scope-to-ring contact for tremendous gripping power without damaging the scope finish

Signature Zee Rings

- Lets you virtually sight in your gun without moving the scope adjustments
- Corrects misalignment caused by off-center receiver holes
- Corrects for bases or rings being slightly off-center
- No need for expensive tapered bases or shimming for thousand-yard shooting
- · Solid steel rings are ideal for hunting







Black Gloss Matte

Nickel

Black Gloss

Signature Universal Dovetail Rings

420511 1 in. High Matte 420521 1 in. Medium Matte 420578* 30 mm Medium Matte 420522 1 in. Medium Nicke 420581* 30 mm High Matte 420530 1 in. High Black 420582* 30 mm Extra-High Matte 420531 1 in. High Matte 420582* 30 mm Extra-High Matte 420531 1 in. High Matte 42052 1 in. Medium Matte 420531 1 in. High Matte 420532 1 in. High Matte 420532 1 in. High Matte 420541 1 in. Medium Matte 420585* 30 mm Extra-High Matte 420561 1 in. Medium Matte 420587* 30 mm High Matte								
420501 1 in. Medium Matte 420520 1 in. Medium Black 420511 1 in. High Matte 420520 1 in. Medium Matte 420578* 30 mm Medium Matte 420522 1 in. Medium Nicke 420581* 30 mm High Matte 420530 1 in. High Black 420582* 30 mm Extra-High Matte 420530 1 in. High Matte 5ignature Double Dovetail In. Medium Matte 42058* 30 mm Extra-High Matte 420561 1 in. Medium Matte 42058* 30 mm Extra-High Matte 420561 1 in. Medium Matte 42058* 30 mm Extra-High Matte	ltem	Size	Height	Finish	ltem	Size	Height	Finish
420511 1 in. High Matte 420521 1 in. Medium Matte 420578* 30 mm Medium Matte 420522 1 in. Medium Nicke 420581* 30 mm High Matte 420530 1 in. High Black 420582* 30 mm Extra-High Matte 420530 1 in. High Matte 420582* 30 mm Extra-High Matte 420531 1 in. High Matte 420582* 30 mm Extra-High Matte 420531 1 in. High Matte 420561 1 in. Medium Matte 420587* 30 mm Extra-High Matte 420561 1 in. Medium Matte 420587* 30 mm Extra-High Matte	Signature U	Iniversal Doveta	ail		Signature Ze	e Rings (We	aver-Style)	
420578* 30 mm Medium Matte 420522 1 in. Medium Nicke 420581* 30 mm High Matte 420530 1 in. High Black 420582* 30 mm Extra-High Matte 420531 1 in. High Matte 420582* 30 mm Extra-High Matte 420531 1 in. High Matte 420582* 30 mm Extra-High Matte 420531 1 in. High Matte 420532 1 in. High Matte 420532 1 in. High Matte 420561 1 in. Medium Matte 420587* 30 mm Extra-High Matte 420561 1 in. Medium Matte 420587* 30 mm High Matte	420501	1 in.	Medium	Matte	420520	1 in.	Medium	Black (
A20581* 30 mm High Matte A2050 1 m. High Black 420581* 30 mm High Matte 42050 1 in. High Black 420582* 30 mm Extra-High Matte 420531 1 in. High Matte Signature Double Dovetail X Matte 420585* 30 mm Extra-High Matte 420561 1 in. Medium Matte 420587* 30 mm Extra-High Matte	420511	1 in.	High	Matte	420521	1 in.	Medium	Matte
420582* 30 mm Extra-High Matte 420531 1 in. High Matte 420582* 30 mm Extra-High Matte 420531 1 in. High Matte 5ignature Double Dovetail	420578*	30 mm	Medium	Matte	420522	1 in.	Medium	Nickel
Signature Double Dovertail A20532 1 in. High Nicke 420561 1 in. Medium Matte 42058* 30 mm Extra-High Matte 420571 1 in. Medium Matte 42058* 30 mm High Matte	420581*	30 mm	High	Matte	420530	1 in.	High	Black (
Signature Double Dovetail 420585* 30 mm Extra-High Mattee 420561 1 in. Medium Mattee 420587* 30 mm High Mattee 420571 1 in. Medium Mattee 420587* 30 mm High Mattee	420582*	30 mm	Extra-High	Matte	420531	1 in.	High	Matte
420561 1 in. Medium Matte 420587* 30 mm High Matte					420532	1 in.	High	Nickel
42036/ 30 mm rign Mare	Signature D	ouble Dovetail			420585*	30 mm	Extra-High	Matte
420571 1 in. High Matte 420588* 30 mm Medium Matte	420561	1 in.	Medium	Matte	420587*	30 mm	High	Matte
	420571	1 in.	High	Matte	420588*	30 mm	Medium	Matte

*30 mm comes with "zero" inserts and +/-.010 inserts for both front and rear rings.





Signature Rimfire/Airgun Rings

ltem	Size	Height	Finish	Finish	
Signature Rin	nfire/Airgun				
420554	1 in.	Medium	Matte		
420556	1 in.	High	Matte		

Comes with clamps for 11 mm and 3/8" dovetails



Pos-Align® Offset Inserts

Signature Pos-Align® Offset Inserts					
Installation	Kit				
626019	1 each of +/005, +/010, +/020				
Gunsmith K	Gunsmith Kit				
626024	10 each of +/005, +/010, +/020				
Individual In	nserts				
626017	+/010 Eccentric Offset				
626018	+/020 Eccentric Offset				

La de St

RUGER®-TO-WEAVER BASE ADAPTER

- For use with Zee Rings
- Mounts optics onto Ruger® firearms that feature the proprietary Ruger® integral mounting system

ltem	Compatible with Ruger® Firearm
410990	M77®, Super Redhawk®
410991	No. 1, 77/22°, 77ML°, 77/44°, Mini-14°, Redhawk°
410992	M77® for use with Eliminator® LaserScope®

BURRIS





ZEE RINGS

- Tough, solid steel
- Weaver-style
- Machined to exacting tolerances to handle recoil or abuse

Zee Ring, Standard Model

Zee Ring, Quick-Detach Model

RIMFIRE/AIRGUN RINGS

 Available in solid 	ltern	Size	Height	Finish	Material	Quick-E		
steel or aluminum	.22 Ring I	.22 Ring Pairs (fits in 22-in. grooved receivers)						
Securely mount	420069	1 in.	Medium	Matte	Steel			
your rimfire or	420072	1 in.	Medium	Black Gloss	Steel			
airgun optic	420073	1 in.	High	Black Gloss	Steel			
	420076	1 in.	High	Matte	Steel			
	420068	l in.	Medium	Matte	Steel			

ltem

420034

420037

420044

420077

420079

420080

420081

420082

420083

420084

420085

420086

420087

Weaver-Style 420031

Height

Low

Medium

Medium

High

High

Low

Low

Medium

High

Low

Medium

Medium

High

High

Size

1 in.

1 in.

1 in.

30 mm

30 mm

1 in.

Finish

Matte

Matte

Matte

Matte

Matte

Nickel

Black Gloss

Black Gloss

Black Gloss

Matte

Matte

Nickel

Nickel

Matte

Detach

CZ-STYLE RINGS

 Solid steel 	
Designed for	
mounting optics	
on CZ rifles	

Quick-Detach

٠

ltem	Size	Height	Finish	Action
CZ 550				
420130	1 in.	Medium	Matte	Long-Action
CZ 527				
420140	1 in.	Medium	Matte	Short-Action



TIKKA® T3® RINGS


- Solid steel
- Ring and base solution specifically designed for Tikka® T3® rifle

ltem	Size	Height	Finish
Tikka T3 Rin	ngs		
420135	1 in.	Medium	Matte
420136	30 mm	Medium	Matte
420137	30 mm	High	Matte



RING HEIGHTS

Ring Heights	Low	Medium	High	Extra-High
Signature 1 In.		0.77	0.89	
Standard 30 mm & Signature 30 mm		0.78	0.89	1.02
Zee 1 In. & Quick-Detach 1 In.	0.63	0.76	0.95	
Zee Signature 1 In.		0.77	0.92	
Zee 30 mm & Zee Signature 30 mm		0.81	0.93	1.18
CZ (All)		1.00		
.22 Signature Deluxe		0.90	1.29	
1-In22 Rings (All)		0.80	0.95	
Tikka T3		1.125	1.250	



Dimensions listed are from the center line of the scope tube to the bottom of the ring.

60

LEU.

XTREME TACTICAL[™] 2-PIECE BASES

- Solid steel bases work with all Weaver-style, Picatinny-style, and mil-spec rings
- Engineered with minimal height and weight
- Mil-spec cross slots guarantee rock-solid attachment
- Matte finish

ltem	Style	Reversible Front Base
410600	XTB-700/7 (Remington® 700 & 7 Short & Long)	
410605	XTB-70/Express (Winchester® 70 Short, Long & Express)	
410606	XTB-70 WSS (Winchester® 70 Short, Long & SXR)	1000
410615	XTB-SavR (Savage® Short & Long Round Rear)	5 · · · · · · · · · · · · · · · · · · ·
410620	XTB-SavF (Savage® Short & Long Flat Rear)	
410625	XTB-ABOLT (Browning® A-Bolt Short & Long)	
410630	XTB-TIKKA® (Tikka®)	
410635	XTB-SAKO® Dovetail (SAKO® Dovetail Steel Base Low Profile)	

XTREME TACTICAL™ 1 PIECE BASES

The new Xtreme Tactical one-piece bases offer the perfect mounting solution for precision shooters. In addition to greater strength and rigidity, the 25 MOA cant offers extended range capability.

- Milled from a single piece of solid steel
- Compatible with all Weaver-style, Picatinny-style rings
- Designed to work with both short and long actions
- Matte finish

ltem	Style	MOA Cant
410650	XTB-Sav Round Rear Long	25
410651	XTB-Sav Round Rear Short	25
410652	XTB-700 Long Action - Howa 1500 Long Action	25
410653	XTB-700 Short Action	25
410655	XTB-Howa 1500 Short Action	25
410658	XTB-TIKKA® (Tikka®)	25
NEW 410660	XTB-Sav Round Rear Long	No Cant
NEW 410661	XTB-Sav Round Rear Short	No Cant
NEW 410662	XTB-700 Long Action - Howa 1500 Long Action	No Cant
NEW 410663	XTB-700 Short Action	No Cant
NEW 410665	XTB-Howa 1500 Short Action	No Cant
NEW 410668	XTB-TIKKA® (Tikka®)	No Cant

	VERACITY	FULLFI	ELD E1, II	DF PRED/	OPTINE,	т	SCOUT	тімв	UINE VERACITY FULLFIELD E1, II DROPTINE, SCOUT TIMBERLINE HANDG
	, 5-25x		εε			ε		E	2-10x-42mm 3-15x, 4-20x, 5-25x 3-15x, 4-20x, 5-25x 3-7x-35mm 4-5-14x-42mm 6-5-20x-50mm 4-5-14x-42mm 4-5-14x-42mm 4-5-14x-42mm 4-5-14x-32mm 4-5-14x-32mm 4-5-14x-32mm 1-27x-32mm
HUNTING MOUNT FIT	2-10x-42mm 3-15x, 4-20x,	2-7x-35mm 3-9x-40mm	4.5-14x-42m 6.5-20x-50m	2-7x-35mm	3-9x-50mm	4.5-14x-42m	2.75-20mm 2-7x32mm	4.5-14x-32m	2-10x-42.mm 3-15x, 4-20x, 2-7x-35.mm 4-5-14x-42.mm 4-5-14x-42.mm 6-5-20x-50.mm 3-9x-40.mm 3-9x-42.mm 3-9x-42.mm 2-75x-20.mm 2-75x-20.mm 2-75x-20.mm 2-75x-22.mm 2-75x-22.mm
Base or Ring Model Gloss Matte Nickel	and the second		Ring Height Se					1	Base or Ring Madel Gloss Matte Nickel Ring Height Selection
BROWNING® A-Bolt (Long action)								18	RUGER® Super Redhawk
XTB-A-Bolt Reversible (Two-piece steel tactical) 410625	мм	ιι	мн	LL	н м	L	L	L	Ruger to Weaver Adapter Base (Use Zee Rings) 410990 L L
BROWNING® A-Bolt, Micro Medallion (Short action)									RUGER®, Super Backhawk with integral ring cuts above barrel
XTB-A-Bolt Reversible (Two-piece steel tactical) 410625	мм	ιι	мн	ιι	нм	ι	L	L	Ruger to Weaver Adapter Base (Use Zee Rings) 410991 L L
BROWNING® A-Bolt/II, WSS Super Short Action (Including Ruger® .2	204 and nev	wer .223							SAKO® with dovetail receiver (Long actions)
XTB-A-WSS Reversible (Two-piece steel tactical) 410626	мм	M L	мн	M L	нм	L	L	L	XTB-Sako (Two-piece steel tactical) 410635 M H L H H L H H L M
CZ Bolt Action Centerfire Rifles									SAKO® with dovetail receiver (Short actions)
CZ 550 (Long Action) - 1 in., medium 420130									хтв-Sako (Two-piece steel factical) 410635 м н ц ц н н ц ц н н м м м
CZ 527 (Short Action) - 1 in., medium 420140									SAUER® 101 (See Remington® 700)
HOWA® 1500, INTERARMS® 1500, MOSSBERG® 1500, S&W® 1500, 1550, 1600	0, 1700 (See F	Remington	· 700)						SAUER® 202
AARLIN® XL7									XTB-SavR Rev LASA 410615 M M L L M H L L M M L L
TB-70/Exp Reversible (Two-piece steel tactical) 410605	MM	1 1	мм	LL	M M		L		SAVAGE® 110, 111, 112, 114, 116 long action, standard barrel, flat rear receiver bridge
IARLIN® XS7				-				101	XTB-SavF Reversible (Two-piece steel tactical) 410620 M M L M M
TB-70/Exp Reversible (Two-piece steel tactical) 410605			мм		AA AA		L		SAVAGE® 10, 11, 12, 14, 16 short action, STRIKER, standard barrel, flat rear receiver bridge
NOSSBERG® MVP, 100, ATR, 4x4, 1500, 1700 (See Remington® 700)	m m		m m						XTB-SavF Reversible (Two-piece steel factical) 410620 M L M L M L M <
OSLER® 48 (See Remington® 700)									SAVAGE® 10FP, 12 short action, Axis, rounded rear receiver bridge, new adjustable trigger system (Also Stevens® 200)
EMINGTON® 700, 721, 725, 40X (Long action) (Also fits Ruger® Ro	aund Bosoine		any athou	-					XTB-SavR Reversible [Two-piece steel tactical] 410615 M L M L M L M M
			мн		нм		1	м	
TB-700/7 Reversible (Two-piece steel tactical) 410600		ML	мп		пм			M	SAVAGE® 110FP, 112, long action, round rear receiver bridge, new adjustable trigger system (Also Stevens® 200) XTB-SavR Reversible [Two-piece steel tactical] 410615 M M L L M H L L H M
EMINGTON® 700, 722, 725, 40X, and 700ML muzzleloader (Shor									And the second
(TB-700/7 Reversible (Two-piece steel tactical) 410600	мм	LL	мн		нм		L	M	SMITH & WESSON® 1500 Rifle (See HOWA®)
REMINGTON® 783									THOMPSON/CENTER® Venture
TB-SavR Rev LASA 410615	M M		мн	LL	нм	L	L	м	XTB-SovR Rev LASA 410615 M M L L M H L L H M L L
REMINGTON® Model 7, 673, XR-100, XP-100 Repeater									TIKKA®
TB-700/7 Reversible (Two-piece steel tactical) 410600	M M					-	L	м	XTB-Tikka Reversible (Two-piece steel tactical) 410630 M H L L M H L L H M L L
IMFIRES - Most .22's with 3/8 grooved receiver, except Anschutz® (XII, and Sako® 78	.22, Brown	ing® T-Bol	t, Kimber	◎ 82, We	atherby	,			WEATHERBY® Vanguard, X (See HOWA®)
22 Signature Deluxe Rings - 1 in., high 420555 420556			•						WINCHESTER® 70, 70A, 670, 770 non express models (Long action, serial number higher than 66,350) .860 rear mount hole spacing (Also fits Marlin® M7 & Browning® Bolt BBR)
22 Signature Deluxe Rings - 1 in., medium 420554		• •		• •		•		•	VTT 70/Fm Describle
22 Rings Aluminum - 1 in., standard height 420071						•			(Two-piece steel todical w/ Zee Rings) 410605 m m L L m m L L m m L L L
22 Deluxe Steel Rings - 1 in., medium 420072 420069									WINCHESTER® 70, 70A, 670, 770 non express models (Short action, serial number higher than 66,350) .860 rear mount hole spacing
2 Deluxe Steel Rings - 1 in., high 420073 420076									XTB-70/Exp Reversible (Two-piece steel tactical) 410605 M M L L M M L L M L L L
UGER® American									WINCHESTER® 70, Super Short Action (Including Ruger® .204 and newer .223)
TB-SavR Rev LASA 410615	мм	ιι	мн	LL	нм	L	L	м	XTB-70/WSS Reversible (Two-piece steel tactical) 410606 M H L L H L L L L H M L M
RUGER® Number 1, 77/22®, 77/17®, 77/44®, 77/ML®, 10/22® Mag	, Mini-14º R	anch, Mi	ni 30®						WINCHESTER® 70 Express Post 1964 (.330 rear mount hole spacing for H&H, STW, and Ultra-Mag magnum length action)
Ruger to Weaver Adapter Base (Use Zee Rings) 410991	мн		-	LM	н	L	L	м	XTB-70/Exp Reversible (Two-piece steel tactical) 410605 M M L L M M L L M L L M
-g									

Notes: Some rifles with heavy/varmint barrels may require one size higher rings. Fits will vary depending on gun modifications and shooting posture. XTR Rings are much higher than all other ring heights, as designated on this page.

Ring Codes L = Low Ring M = Medium Ring H = High Ring F = Front Ring R = Rear Ring XH = Extra-High Ring Low rings can be used on non-Posi-Lack™ model

62

BURRIS OPTICS 2019

 Base Codes
 LA = Long Action
 LU = Long Eye Relief Base (Dovetail front, windage adjustable rear)
 LH = Left Hand
 REV = Reversible Front Base (.850 in. longer or shorter ring span than standard on TU- and DD-bases)

TACTICAL MO	UNT FIT	хт	- F	XTRII		RT-6	AR	1		MSR		FULLFII TAC3	XTRII XTRII MTAC RT-6 AR MSR	FULLFIELD TAC30
		3.3-18x50mm	3x56mm	1-5x, 1.5-8x, 2-10x, 1-8x 3-15x, 4-20x, 5-25x, 8-40x	.5-6x40mm	1-6x24mm	3-9x40mm	4.5-14x42mm	2-7x35mm	3-9x40mm	4.5-14x42mm	1-4x24mm	3.3-1&50mm 5.5-2&56mm 5.5-2&56mm 1-5x, 1.5&x, 2-10x, 1-&x 1-5x, 1.5&x, 2-10x, 1-&x 1-5x, 1.5&xd0mm 1-6x, 2-10x, 1-&x 3-9xd0mm 3-9xd0mm 4.5-14xd2mm 4.5-14xd2mm	1-4x24mm
Base or Ring Model	Gloss Matte Nick	el					Ring Heigh	nt Selection	ı				ase or Ring Model Gloss Matte Nickel Ring Height Selection	-
BROWNING® A-Bolt (Long action)													AKO® with dovetail receiver (Long actions)	
XTB-A-Bolt Reversible (Two-piece steel tactical)	410625	м	н	м м	۸ N	и м	L	м	L	L	м	м	TB-Sako (Two-piece steel tactical) 410635 H XH M H M M L H L L H	м
XTB-A-bolt Reversible (Two-piece steel to	ictical)												AKO® with dovetail receiver (Short actions)	
XTB-A-Bolt Reversible (Two-piece steel	410625		н			л м		м			м	м	TB-Sako (Two-piece steel tactical) 410635 H XH M H M M M M M M	м
tactical)		m						m			m	m	AVAGE® 110, 111, 112, 114, 116 long action, standard barrel, flat rear receiver bridge	
BROWNING® A-Bolt, WSS Super Short A	ction (Including Ruger®	.204 and n	ewer .	223)									TB-SavF Reversible (Two-piece steel tactical) 410620 M H M M M M M M L M M	м
XTB-A-WSS Reversible (Two-piece steel tactical)	410626	м	н	мм	۸ ۸	n n	L	м	м	L	м	м	AVAGE® 110FP, 112, long action, round rear receiver bridge, new adjustable trigger system (Also Stevens® 200)	
HOWA® 1500, INTERARMS® 1500, MOSSI	BERG® 1500, S&W® 150	0, 1550, 16	00, 17	700 (See	Remin	igton® 7	700)						TB-SavR Reversible (Two-piece steel tactical) 410615 M H M M M M L M L L M	м
REMINGTON® 700, 721, 725, 40X (Long	action) (Also fits Ruger	® Round Re	ceiver	and mar	ıv oth	ers)							AVAGE® 10, 11, 12, 14, 16 short action, STRIKER, standard barrel, flat rear receiver bridge	
XTB-700/7 Reversible (Two-piece steel													TB-SavF Reversible (Two-piece steel tactical) 410620 M H M M M M L M L L M	м
tactical)	410600	м	н	M	۸ ۸	n w	۰.	м	м	L	м	м	AVAGE® 10FP, 12 short action, rounded rear receiver bridge, new adjustable trigger system (Also Stevens® 200)	
REMINGTON® 700, 722, 725, 40X, and 2	700ML muzzleloader (S	hort action)										TB-SavR Reversible (Two-piece steel tactical) 410615 M H M M M M L M L L M	н
XTB-700/7 Reversible (Two-piece steel tactical)	410600	м	н	M	۸ A	и м	L	м	L	L	м	м	MITH & WESSON® 1500 Rifle (See HOWA®)	
REMINGTON® Model 7, 673, XR-100, XP	-100 Repeater												IKKA®	
XTB-700/7 Reversible (Two-piece steel tactical)	410600	м	н	M N	۸ N	м м	м	н	L	м	н	м	TB-Tikka Reversible (Two-piece steel tactical) 410630 H XH M H M M L M L L M	м
RIMFIRES - Most .22's with 3/8 grooved	receiver, except Anschu	utz® .22, Bro	wning	g® T-Bolt,	Kimbe	er® 82,	Weath	erby® X	XXII, d	and Se	ako® 7	78	VEATHERBY® Vanguard (See HOWA®)	
.22 Signature Deluxe Rings - 1 in., high	420554						•			•			VINCHESTER® 70, 70A, 670, 770 non express models (Long action, serial number higher than 66,350) .860 rear mount hole spacing Iso fits Marlin® M7 & Browning® Bolt BBR	
.22 Rings Aluminum - 1 in., standard height 42	20071						•		•	•			TB-70/Exp Reversible 410605 M H M M M L M L L M	м
.22 Deluxe Steel Rings - 1 in., medium 42	20072 420069								•	•			ivorpiece steel hadical w/ Zee Rings) 410000 m m m m m m L m L L m	
RUGER® Number 1, 77/22®, 77/17®, 77/	/44°, 77/ML°, 10/22° M	Aag, Mini-1	4® Ran	nch, Mini	30 ®								VINCHESTER® 70, 70A, 670, 770 non express models (Short action, serial number higher than 66,350) .860 rear mount hole spacing	
Ruger to Weaver Adapter Base (Use Zee 4: Rings)	10991	м	хн	м н	H A	м м	м	н	L	м	н	м	TB-70/Exp Reversible (Two-piece steel tactical) 410605 M H M M M M L M L L M	м
RUGER® M77® Integral Base on receiver (Short & Long actions)												VINCHESTER® 70, Super Short Action (Including Ruger® .204 and newer .223)	
Russes to Mamon Admites Press													TB-70/WSS Reversible (Two-piece steel tactical) 410606 H XH M H M M L H H L H	м
Ruger to Weaver Adapter Base 41 (Use Zee Rings)	10990	м	ΧН	M F	H A	M M	м	н	L	м	н	м	VINCHESTER® 70 Express Post 1964 (.330 rear mount hole spacing for H&H, STW, and Ultra-Mag magnum length action)	
													TB-70/Exp Reversible (Two-piece steel tactical) 410605 M H M M M M L M M L M	м

 Base Codes
 LA = Long Action
 LU = Long Eye Relief Base

 SA = Short Action
 (Dovetail front, windage adjustable rear)

LH = Left Hand REV = Reversible Front Base (.850 in. longer or shorter ring span than standard on TU- and DD-bases)
 Base Codes
 LA = Long Action
 LU = Long Eye Relief Base

 SA = Short Action
 (Dovetail front, windage adjustable rear)

LH = Left Hand REV = Reversible Front Base (.850 in. longer or shorter ring span than standard on TU- and DD-bases)

Burris RETICLES

Reticles take the guesswork out of target size and distance, wind hold-off, and holdover. There's a quality Burris reticle with features for every shooting challenge.

THE RIGHT FOCAL PLANE FOR THE SHOT

FRONT FOCAL PLANE


Front focal plane (FFP) reticle design, also called first focal plane, places the reticle in front of the zoom mechanism, allowing the reticle size to increase or decrease as magnification is increased or decreased.


Trajectory compensation and reticle measurements are always correct and proportional for the selected power setting.


REAR FOCAL PLANE


Rear focal plane (RFP) reticle design, also called second focal plane, places the reticle behind the zoom mechanism so the reticle size stays constant at every magnification.


Trajectory compensation and reticle measurements will only be correct at one magnification setting (normally high power).












Simple reticle


- Thin crosshair with bolded edges is highly visible
- · Lets you zero in on animals of nearly any size






RETICLE SUBTENSIONS (in MOA)

	LC	W MA	G	HIGH MAG					
Model	А	В	w	А	В	w			
Fullfield II™									
3-9x40	.86	2.3	26	.31	.83	9.40			
Handgun									
2x-20	.81	2.2	25						
2-7x32	.90	2.5	28	.27	.72	8.20			
Scout™ (Heav	y Plex	Reticle)							
2-75x20mm	.70	3.4	22						







C4 WIND MOA™

- Clean, simple reticle works perfectly with custom elevation knob and WindMap™ on the AR Riflescope platform
 1 MOA tick marks allow easy compensation for wind drift





RETICLE SUBTENSIONS (@ High Mag)



LONG-RANGE MOA

- Increases precision for long-range competition
- Ultra-fine center area helps shooters engage targets with extreme accuracy
- MOA-based, proprietary Burris design increases detail for long-range competition without adding clutter or distraction
- Design increases speed and precision for wind hold-off, range estimation and impact measurement


DETAIL



BALLISTIC MIL-DOT

- Ideal for very flat-shooting cartridges
- Perfect choice for long-range target shooters, varmint shooters, and tactical marksmen
- Mil-dots can be used for estimating range and target size, and help compensate for wind drift

DETAIL




RETICLE SUBTENSIONS (in MOA)


Model	А	В	С	D	E	F	G	н
4.5-14x42	30	1	1	5	.13	.2	1	2



RETICLE SUBTENSIONS (in Mils; @ 20x)

Model	A	В	w	
6.5-20x50	.05	.78	10	






BALLISTIC PLEX[™]

ANY REPORT OF THE MERINA


- The most simple, effective and elegant trajectorycompensating reticle
- Quick and easy to use
- Can be matched to any caliber or bullet weight for longrange accuracy

DETAIL




RETICLE SUBTENSIONS (in MOA)

	LC	W MA	G	HIGH MAG					
Model	А	В	w	А	В	w			
2-7x35	1.1	3.0	26	.39	1.06	9.1			
3-9x40	.86	2.3	20	.31	.83	7.1			
3-9x-50	.82	2.2	19	.29	.79	6.8			
4.5-14x-42	.58	1.6	19	.19	.52	6.2			




BALLISTIC PLEX E1[™]

- Trajectory-compensating technology and cascading dots for compensating wind drift with nearly any biggame hunting cartridge
- Dots represent hold-off for a 10 mph wind
- Simple, accurate and easy to use



RETICLE SUBTENSIONS (in MOA)


	LC	w w	AG	HIGH MAG					
Model d	A	В	w	А	В	w			
2-7x35 O		3.0	26	.39	1.06	9.1			
3-9x40 5	.86	2.3	20	.31	.83	7.1			
3-9x50	.82	2.2	19	.29	.79	6.8			
4.5-14x42	.58	1.6	19	.19	.52	6.2			



BALLISTIC PLEX E1[™] MV


- Trajectory-compensating technology and cascading dots for compensating wind drift
- Dots represent hold-off for a 10 mph wind
- At 20x power setting, it's calibrated for the .22-250 cartridge; also works well with other flat-shooting cartridges
- Mil measurement tools aid in calculating distance and target size


DETAIL



RETICLE SUBTENSIONS (in Mils)

Model	А	В	с	D	E	F	G	н
6.5-20x50	.125	.03	5	.25	.5	1.5	2.5	.25





١.,

BALLISTIC PLEX E1TM FFP

2-10x/3-15x

4-20x/5-25x

- MOA reticle
- Trajectory compensation out to 600 yards
- Cascading dots represent a 10 mph wind hold-off
- Bold, tapered crosshairs in an FFP design make the reticle highly usable, ensuring its visibility even on low power

G н

2 .3

DETAIL


Model

2-10x42

3-15x50

20

20 .5 .2 2 4 4 2 .3




RETICLE SUBTENSIONS (in MOA)

.3

2 4 4

.75



RETICLE SUBTENSIONS RFP (in MOA)


Model	А	В	С	D	E	F	G	н	1	J	к
4-20x50	.38	13	4	1	1	.5	.15	2	.8	1.2	.38
5-25x50	.35	13	4	1	1	.5	.13	2	.8	1.2	.35

FFP PLANE RONT FOC. 14.

BALLISTIC PLEX E1[™] FFP VARMINT

- Precision varmint reticle
- MOA tick marks for measuring distance and determining target size
- Trajectory compensation out to 700 yards
- Cascading dots represent a 10 mph wind hold-off
- Bold crosshairs in an FFP design make the reticle highly usable, ensuring its visibility even on low power

DETAIL




RETICLE SUBTENSIONS (in MOA)

Model	А	В	с	D	E	F	G	н	1	J	К
4-20x50	2	40	2	.38	1	4	.13	2	4	.23	.13
5-25x50	2	40	2	.30	1	4	.11	2	4	.18	.11

67 BURRIS OPTICS 2019

FFP

FRONT




SCR[™] MIL

in all of the second second


- Mil-based, proprietary Burris design
 Increases precision for long-range competition, without adding clutter or distraction
- Extended center illuminated area (select models only) lets the shooter confidently engage targets at long distances in low light and shadows
 Increases speed and precision for wind hold-off and for range estimation
- and impact measurement






RETICLE SUBTENSIONS

Unit	A	В	с	D	E	F	G	н	Т	J	К	L	м	N	0
4-20x50 an	d 5-25	×50													
Mils	1.00	.50	.035	.10	.25	.10	.08	2.00	.20	.40	.60	.80	.02	.03	.125
CM	10	5	.35	1	2.5	1	.8	20	2	4	6	8	.2	.3	1.25
in./100yd.	3.60	1.80	.13	.36	.90	.36	.29	7.20	.72	1.44	2.16	2.88	.07	.11	.45
MOA	3.44	1.72	.12	.34	.86	.34	.28	6.88	.69	1.38	2.06	2.75	.07	.10	.43
3-15x50															
Mils	1.00	.50	.05	.10	.25	.12	.08	2.00	.20	.40	.60	.80	.02	.04	.125
CM	10	5	.5	1	2.5	1.25	.8	20	2	4	6	8	.4	.4	1.25
in./100yd.	3.60	1.80	.18	.36	.90	.45	.29	7.20	.72	1.44	2.16	2.88	.07	.14	.45
MOA	3.44	1.72	.17	.34	.86	.43	.28	6.88	.69	1.38	2.06	2.75	.07	.14	.43

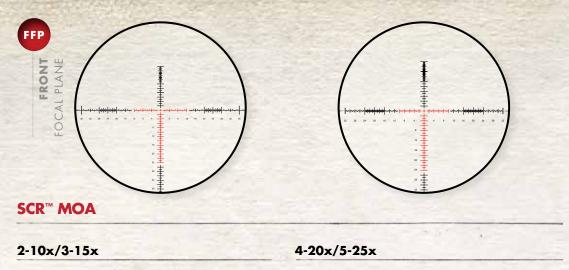


• Burris offers an MOA-based version of the SCR reticle with the same features as the SCR Mil.

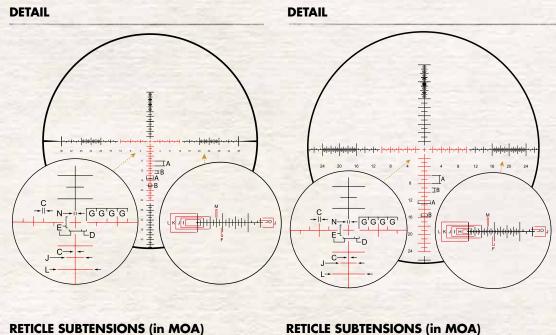

Model	A	В	с	D	Е	F	G	н	I	J	к	L	м	N	0	Model
2-10x / 3-15x																

RETICLE S	SUBTENSIONS	in MOA
------------------	-------------	--------

Model	А	В	С	D	E	F	G	н	Т	J	к	L	м	Ν	0
4-20x / 5-25x	2	1	.12	.5	1	.25	.5	.7	1	1.5	2	3	.07	.11	.35

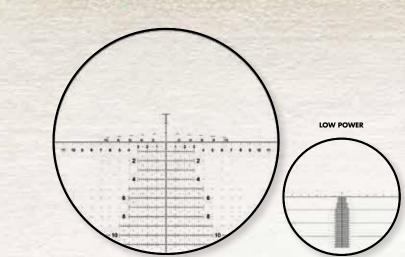

HORUS[®] H591[™]

- Detailed milradian grid pattern provides multiple hold points to make quick elevation and windage adjustments in the field
- Use the hash marks on either side of the main vertical crosshair to engage moving targets
- Rapid Range Bars let you estimate the range to common-sized targets quickly and accurately


DETAIL

FFP


PLANE

FOCAL

FRONT

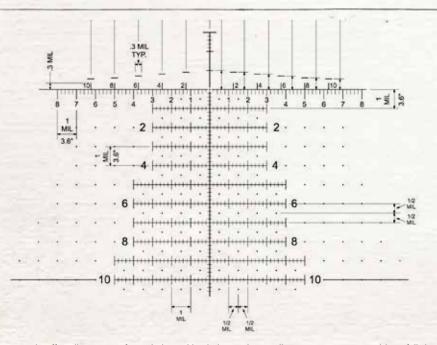


The H591 reticle offers illumination for twilight and lowlight conditions. Illumination is not viewable in full daylight.




- Optimized for long-range F-Class competitive shooting
- Laid out in 0.5 MOA increments
- A secondary horizontal crosshair gives the shooter 20 MOA of additional adjustment, with the MOA hash marks for wind hold-off still visible
- Illuminated center dot at the 0, 10, 20, and 30 MOA marks






RETICLE SUBTENSIONS (in MOA)




BURRIS OPTICS 2019



G2B MIL-DOT


- Mil-based reticle with hash marks between the mil dots for more precise aiming, distance measurement, holdover and hold-off for wind
- Excellent in tactical situations when determining target distance and size is critical

DETAIL



RETICLE SUBTENSIONS


Units	А	В	С	D	E	F	G	н	J	к	L
Mils	10	.5	.5	.2	.05	.5	1	.05	.05	5	2
in./100 yd.	36	1.8	1.8	.72	.18	.18	3.6	.18	.18	18	7.2
Models	-	-					34				
Droptine	4.5-1	4x42 (R	ear Foc	al Plane)							
XTR II	2-10×	42, 3-1	5x50, 4	-20x50	5-25×5	50					



BALLISTIC CQ

- Designed for competitive shooting, law enforcement and military applications
- Circular center provides ultra-fast engagement at close distances
- Dots provide trajectory compensation out to 600 yards for popular 5.56 and 7.62

DETAIL



RETICLE SUBTENSIONS (in Mils)


Units	А	В	С	D	E	F	G	н
Mils	5	.75	.2	.66	.33	.25	.2	.55
Models								
Prism	AR-33	32, AR-55	56					
MTAC*	1-4x2	4, 1.5x6	×42					
*Calibration	is for high	power						

RFP PLANE FOCAL EAR 2

BALLISTIC 3X


- Stadia lines and center horseshoe are optimized for viewing at 3x magnification
- Fine aiming lines for elevation and windage adjustment, precise shot placement at distance • Proven broken circle design with center dot for
- ultra-fast engagement at short distances
- Center illumination is daylight bright and won't wash out in harsh light

DETAIL



RETICLE SUBTENSIONS (in Mils)


Model	A	В	с	D	E	F	G
AR-332	1	.50	.175	.125	.1	1.25	10



BALLISTIC AR™

- Versatile tactical reticle with milradian meaurements
- Illuminated broken circle with center dot allows for ultra-fast engagement at short distances
- Trajectory compensation out to 600 yards
- Ideal for achieving long-range accuracy with 5.56 and .223 ammunition

DETAIL



RETICLE SUBTENSIONS (in Mils)

Units	А	В	С	D	E	F	G
Mils	10	1	.5	.125	.75	1.25	.175
Models							
Prism	AR-536						
MTAC	1-4x24, 1.5-	5x42					
RT-6	1-6x24						




XTR II BALLISTIC 5.56 GEN 3

- Helps shooters achieve maximum accuracy with 5.56 and .223 ammunition
- Milradian measurements and an illuminated broken circle with center dot allow for ultra-fast engagement at short distances

Outside Dia. = 2.25 Mil

• Trajectory compensation allows for engagement of targets out to 1,000 yards

DETAIL



RETICLE SUBTENSIONS (in Mils)

Model	А	В	С
1-5x24, 1.5-8x28	1	.5	.1


REAR FOCAL PLANE

XTR II BALLISTIC CQ MIL

- Tactical reticle with milradian measurements
- Illuminated broken circle with center dot allows for ultra-fast engagement at short distances


• Simple mil marks create easy holdover and wind hold-off references


DETAIL



RETICLE SUBTENSIONS (in Mils)

Model	А	В	С	D	
1-5x24, 1.5x8	1	.5	.1	1.5	






BALLISTIC DOT


い スペンシンドー 中国語

- Circular center dot provides ultra-fast engagement at close distances, with trajectory compensation out to an impressive 1,000 yards • Daylight-bright illuminated center dot
- Ideal for achieving long-range accuracy with 5.56 and .223 ammunition

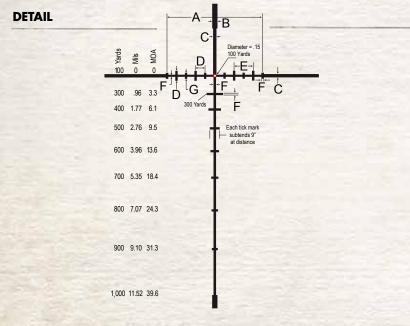

RETICLE SUBTENSIONS RFP (in Mils)


Model	А	В	С	D	E	F	G
1-8x24mm	5	.25	.15	.5	1	.1	.3



BALLISTIC CIRCLE DOT[™]


- Versatile tactical reticle with milradian meaurements
- Illuminated circle with small center dot provides speed at low magnification and precision at high magnification
- Trajectory compensation out to 600 yards
 Ideal for achieving accuracy with 5.56 and .223 ammunition

DETAIL



RETICLE SUBTENSIONS FFP (in Mils)


			-	_		1.1.1
Model	A	В	С	D	E	F
1-8x24mm	5	2	1	.5	.3	.1



F-CLASS DCH


- Designed purposefully to assist F-Class and other long range shooters in executing the highest level of accuracy possible
- The ultrafine center .02 MOA crosshairs are enhanced for contrast by the .125MOA center dot

DETAIL



RETICLE SUBTENSIONS (in MOA)


Model	А	В	С	D
8-40x50	.5	.125	.03	.02



BALLISTIC E2

- The Ballistic E2 is a rear focal plane reticle calibrated for traditional, magnum and varmint loads
- Hash marks on lower vertical crosshair are calibrated for dead-on aiming from 100 to 600 yards and cascading dots help you quickly and easily adjust for a 10-m.p.h. crosswind

DETAIL



All Subtensions in MOA at 15X magnification. When modifying for 10X, leave all actual reticle dimensions the same except the Trajectory bar and wind spacing which must maintain it's MOA values as shown at 15X

RETICLE SUBTENSIONS (in MOA)

Model	А	В	с	D	E	F
2-10x42	.170	.120	.230	.45	.50	1.00
3-16x50	.170	.120	.230	.45	.50	1.00

MATCH YOUR EXACT BALLISTICS TO YOUR BURRIS RETICLE

Burris makes it easy to match your environment, cartridge, gun and scope to provide the exact reticle data you need. Whether you dial in a solution, or prefer an exact holdover, this tool will calculate it for you. Learn



precisely where your shot will fall at any distance.

Burris	a serie friend and a serie front and	-
RETICLE AN	ALYSIS	
	Bertik Ballatis Pisa Ef	

The Burris Ballistic Services offers a newly updated set of sophisticated online ballistic tools that will allow you to:

- Build & true a dope card
- Program your Eliminator riflescope
- Order custom elevation and windage knobs
- Analyze your Burris reticle

With our easy-to-use software, expansive cartridge and bullet libraries, and highly customizable results, the Burris Ballistic Services will turn you into a reticle expert and a pro on the shooting range.

These tool were developed with the serious shooter in mind, but it's also a great way for any novice to learn more about long range shooting.

And with the ballistic calculator adding in environmental factors, it's not just quicker: it's far more accurate than ever before.

burrisoptics.com/ballistics

74 HUNTING SPECIFICATIONS

San de la serie a Ministerie a

No.						-	-			-											$\left(\begin{array}{c} \\ \end{array} \right)$	-)
Elimina	itor® III La	serScope	[®] Series			-	0			4	-										X96 Retic	de
ltern	Magnification	Objective End Diameter	Clear Objective Diameter	Ocular End Diameter	Laser Range (Environmental conditions may limit range)	Operating Temperature	Reticle	Illumination	Focal Plane	(L	eld of View ow to High, 100 yds.)	Eye Relief	Exit Pupil (Low to High)	Click Value	Elevation Adjustment, Total Capability*	Windage Adjustment, Total Capability*	Parallax/Focus	Length	Weight	Battery	Mounting Rai Length	Remo ail Cable Switch
3-12x44	mm																					
200120	3-12x	61 mm	44 mm	42 mm	750 yds. (non-reflective) – 1200+ yds. (reflective)	-15°F – +122°I	F X96	•	RFP	Matte 3	3 - 9 ft.	3.5 – 4 in.	16 – 4.2 mm	1/8 MOA	50 MOA	50 MOA	30y to inf	13.5 in.	28.8 oz.	CR123A	6.9 in.	No
4-16x50	mm																					
200116	4-16x	65 mm	50 mm	42 mm	750 yds. (non-reflective) – 1200+ yds. (reflective)	-15°F – +122°I	F X96	•	RFP	Matte 2	6 - 7 ft.	3.5 – 4 in.	12.5-3.1 mm	1/8 MOA	40 MOA	40 MOA	50y to inf	15.5 in.	30.4 oz.	CR123A	8.5 in.	No
200119	4-16x	65 mm	50 mm	42 mm	750 yds. (non-reflective) – 1200+ yds. (reflective)	-15°F – +122°I	F X96	•	RFP	Matte 2	6 - 7 ft.	3.5 – 4 in.	12.5-3.1 mm	1/8 MOA	40 MOA	40 MOA	50y to inf	15.5 in.	30.4 oz.	CR123A	8.5 in.	Yes
	MOA is roughly 25 les mount and batter		on from center													-	\square	\square		T	T	
Veracit	y™ Riflesc	ones Seri	96					=0			-	-	19.2			Ballité		allistic Plex E1™ FI	7 C			
veruen	y kinese					-		-				_	100		Knob Style –						JCK M	NA
ltem	Magnification	Objective End Diameter	Clear Objective Diameter	Ocular End Diameter	Reticle	Focal Plane	Main Tube Size	Finish	Field o @ 100	of View (Low to) yds.)	High, E;	ye Relief	Exit Pupil (Low to High)	Click Value	Elevation & Windage*	Elevation A Total Capa	djustment, Wi bility* Tot	indage Adjustment, al Capability*	Parallax/Fa	ocus Leng	gth ∨	Neight
2-10x42	mm																					
200621	2-10x	49.5 mm	42 mm	44.25 mm	Ballistic Plex E1™ FFP	FFP	30 mm	Matte	52 -	10.5 ft.	3	1.50 – 4.25 in.	31 – 4.2 mm	1/4 MOA	MAD/LC	70 MOA	40	AOM	50y to in	F 13.	.5 in. 2	22.7 oz.
200622	2-10x	49.5 mm	42 mm	44.25 mm	Ballistic E2™ RFP	RFP	30 mm	Matte	52 -	10.5 ft.	3	.50 – 4.25 in.	31 – 4.2 mm	1/4 MOA	MAD/LC	70 MOA	40	AOM	50y to in	F 13.	.5 in. 2	22.7 oz.
3-15×50	mm																					
200636	3-15x	58 mm	50 mm	44.25 mm	Ballistic Plex E1™ FFP	FFP	30 mm	Matte	36 -	7.5 ft.	3	1.50 – 4.25 in.	16 - 3.3 mm	1/4 MOA	MAD/LC	70 MOA	40	AOM	50y to in	f 14.	.1 in. 2	25.2 oz.
200636	3-15x	58 mm	50 mm	44.25 mm	Ballistic E2™ RFP	RFP	30 mm	Matte	36 -	7.5 ft.	3	1.50 - 4.25 in.	16 - 3.3 mm	1/4 MOA	MAD/LC	70 MOA	40	AOM	50y to in	F 14.	.1 in. 2	25.2 oz.
4-20×50	mm																					
200640	4-20x	58 mm	50 mm	44.25 mm	Ballistic Plex E1™ FFP Varmint	FFP	30 mm	Matte	26 -	5.5 ft.	3	1.50 – 4.25 in.	12 – 2.5 mm	1/4 MOA	TC/Z	70 MO4	40	MOA	50y to in	f 15.	.0 in. 2	27.2 oz.
200641	4-20x	58 mm	50 mm	44.25 mm	Ballistic Plex E1™ FFP	FFP	30 mm	Matte	26 -	5.5 ft.	3	1.50 – 4.25 in.	12 – 2.5 mm	1/4 MOA	MAD/LC/	Z 70 MOA	40	AOM	50y to in	f 15.	.0 in. 2	27.2 oz.
5-25×50	mm																					
200650	5-25x	58 mm	50 mm	44.25 mm	Ballistic Plex E1™ FFP Varmint	FFP	30 mm	Matte	21 -	4.3 ft.	3	.50 – 4.25 in.	10 – 2.0 mm	1/4 MOA	TC/Z	64 MOA	30) MOA	50y to inf	f 16.	.4 in. 2	28.2 oz.

500 09

30 MOA

30 MOA

16.4 in.

16.4 in.

28.2 oz.

28.2 oz.

50y to inf

50y to inf

200652 5-25x 58 mm *Example: 50 MOA is roughly 25 MOA from center

*Example: 50 MOA is roughly 25 MOA in any direction from center

58 mm

50 mm

50 mm

5-25x

200651

MAD = M.A.D. System, single turn LC = Low, Capped Knob LT - Low, Single-Turn Tactical Knob TC - Tall, Capped Knob TT - Tall, Multi-Turn Tactical Knob Z - Zero Click Stop E - Extra Low, Capped Knob (included in box) *Knob Style Codes

Matte

Matte

30 mm

30 mm

FFP

FFP

44.25 mm Ballistic Plex E1™ FFP

44.25 mm SCR™ MOA

					Statistics of the local division in which the local division in which the local division in the local division	-	-	-	and the second							/	
Fullfield	d E1™ Rifles	copes Serie	es		and the second	-								Ballistic Plex E1 ^{TP}	M Ballistic Plex	E1™MV L	ong-Range MOA
ltern	Magnification	Objective End Diameter	Clear Objective Diameter	Ocular End Diameter	Reticle	Focal Plane	Main Tube Size	Finish	Field of View (Low to High, @ 100 yds.)	Eye Relief	Exit Pupil (Low to High)	Click Value	Elevation Adjustment, Total Capability*	Windage Adjustment, Total Capability*	Parallax/Focus	Length	Weight
2-7x35m	ım																
200317	2-7x	41 mm	35 mm	39 mm	Ballistic Plex E1™	RFP	1 in.	Matte	45-13 ft.	3.1-4.1 in.	17-5 mm	1/2 MOA	60 MOA	60 MOA		11.4 in.	12.0 oz.
3-9x40m	ım																
200320	3-9x	48 mm	40 mm	39 mm	Ballistic Plex E1™	RFP	1 in.	Matte	33-13 ft.	3.1-3.4 in.	13-5 mm	1/4 MOA	50 MOA	50 MOA		12.2 in.	13.0 oz.
200322	3-9x	48 mm	40 mm	39 mm	Ballistic Plex E1™, Illum.	RFP	1 in.	Matte	33-13 ft.	3.1-3.4 in.	13-5 mm	1/4 MOA	50 MOA	50 MOA		12.2 in.	13.0 oz.
4.5-14x4	12mm																
200338	4.5-14x	51.5 mm	42 mm	39 mm	Ballistic Plex E1™	RFP	1 in.	Matte	22-7.5 ft.	3.1-3.8 in.	9-3 mm	1/4 MOA	40 MOA	40 MOA	50y to inf	12.6 in.	15.3 oz.
200344	4.5-14x	51.5 mm	42 mm	39 mm	Long-Range MOA	RFP	1 in.	Matte	22-7.5 ft.	3.1-3.8 in.	9-3 mm	1/4 MOA	40 MOA	40 MOA	50y to inf	12.6 in.	15.3 oz.
6.5-20x5	50mm																
200341	6.5-20x	63 mm	50 mm	39 mm	Ballistic Plex E1™ MV	RFP	1 in.	Matte	18-6 ft.	3.1-3.6 in.	7.6-2.5 mm	1/4 MOA	30 MOA	30 MOA	50y to inf	14.0 in.	16.9 oz.

3.50 - 4.25 in.

3.50 - 4.25 in.

10 – 2.0 mm

10-2.0 mm 1/4 MOA

1/4 MOA

MAD/LC/Z

MAD/LT/Z/E 64 MOA

64 MOA

21 - 4.3 ft.

21 - 4.3 ft.

BURRIS OPTICS 2019

														() (-		(
				_		-											
		-					1.1					1000		Ballistic Plex	м Р	ex	Ballistic Mil-Dot
Fulffield"	II Riflescop	Objective End Diameter	Clear Objective Diameter	Ocular End Diameter	Reticle	Focal Plane	Main Tube Size	Finish	Field of View (Low to High, @ 100 yds.)	Eye Relief	Exit Pupil (Low to High)	Click Value	Elevation Adjustment, Total Capability*	Windage Adjustment, Total Capability*	Parallax/Focus	Length	Weight
2-7x35mm																	
200123	2-7x	41 mm	35 mm	39 mm	Ballistic Plex™	RFP	1 in.	Matte	45-13 ft.	3.1-4.1 in.	17-5 mm	1/2 MOA	60 MOA	60 MOA		11.4 in.	12.0 oz.
3-9x40mn	1																
200161	3-9x	45.5 mm	40 mm	39 mm	Plex	RFP	1 in.	Matte	33–13 ft.	3.1-3.4 in.	13-5 mm	1/4 MOA	50 MOA	50 MOA		12.2 in.	13.0 oz.
200162	3-9x	45.5 mm	40 mm	39 mm	Ballistic Plex™	RFP	1 in.	Matte	33-13 ft.	3.1-3.8 in.	13-5 mm	1/4 MOA	50 MOA	50 MOA		12.2 in.	13.0 oz.
200169	3-9x	45.5 mm	40 mm	39 mm	Ballistic Plex™	RFP	1 in.	Nickel	33–13 ft.	3.1-3.4 in.	13-5 mm	1/4 MOA	50 MOA	50 MOA		12.2 in.	13.0 oz.
4.5-14x42	mm																
200183	4.5-14x	56 mm	42 mm	39 mm	Ballistic Plex™	RFP	1 in.	Matte	22-7.5 ft.	3.1-3.8 in.	9-3 mm	1/4 MOA	40 MOA	40 MOA	50y to inf	13.0 in.	18.0 oz.
6.5-20x50	mm																
200193	6.5-20x	63 mm	50 mm	39 mm	Ballistic Mil-Dot	RFP	1 in.	Matte	18-6 ft.	3.1-3.6 in.	7.6-2.5 mm	1/4 MOA	30 MOA	30 MOA	50y to inf	14.5 in.	19.0 oz.
*Example: 50 M	DA is roughly 25 MOA	A in any direction from	center														

30 **Predator Quest® Riflescopes Series** Ballistic Plex E1™ Field of View (Low to High, @ 100 yds.) Elevation Adjustment, Total Capability* Windage Adjustment, Total Capability* Clear Objective Ocular End Exit Pupil (Low to High) Objective End Eye Relief Item Magnificatio Diamete Diameter Reticle Focal Plane Main Tube Size Finish Click Value Parallax/Focu Length[†] Weight 4.5-14x42mm 200370 39 mm Ballistic Plex E1™ RFP 1 in. 22-7.5 ft. 3.1-3.8 in. 9-3 mm 1/4 MOA 40 MOA 40 MOA 13.4 in. 15.3 oz. 4.5-14x 51.5 mm 42 mm Matte 50y to inf 200371 4.5-14x 51.5 mm 42 mm 39 mm Ballistic Plex E1™ RFP 1 in. Camo 22-7.5 ft. 3.1-3.8 in. 9-3 mm 1/4 MOA 40 MOA 40 MOA 50y to inf 13.4 in. 15.3 oz. *Example: 50 MOA is roughly 25 MOA in any direction from center [†]Length includes ARD



BURRIS OPTICS 2019

75 B

⁷⁶ HUNTING SPECIFICATIONS

Here and the second of the

Heavy Plex Bollistic PlexTM


) oz.

5							-	-	-	10000								J
N O	Scout R	iflescopes a	Series					- 15	211-0							Heavy Plex	E	Ballistic Plex™
	ltern	Magnification	Objective End Diameter	Clear Objective Diameter	Ocular End Diameter	Reticle	Focal Plane	Main Tube Size	Finish	Field of View (@ 100 yds.)	Eye Relief	Exit Pupil	Click Value (@ 100 yds.)	Elevation Adjustment, Total Capability (@ 100 yds.)*	Windage Adjustment, Total Capability (@ 100 yds.)*		Length	Weight
C	2-7x32m	m																
2	200261	2-7x	39 mm	32 mm	38 mm	Ballistic Plex™	RFP	1 in.	Matte	23 ft. low – 8 ft. high	9.2-12 in.	16 mm low-4.6 mm high	1/4 in.	66 in.	66 in.		9.7 in.	13.0 oz.
× C	2.75x20m	nm																
'n	200269	2.75x	27 mm	20 mm	35 mm	Heavy Plex	RFP	1 in.	Matte	15 ft.	7.3 in.	7.3 mm	1/2 in.	140 in.	140 in.		9.2 in.	7.0 oz.
	*Example: 50 M	MOA is roughly 25 MO	A in any direction from	center														T

						-	-	- 65	-									
Timberl	ine [™] Riflesc	opes Serie	S			_	-										Ballis	stic Plex™
ltern	Magnification	Objective End Diameter	Clear Objective Diameter	Ocular End Diameter	Reticle		Focal Plane	Main Tube Size	Finish	Field of View (Low to High, @ 100 yds.)	Eye Relief	Exit Pupil (Low to High)	Click Value	Elevation Adjustment, Total Capability (@ 100 yds.)*	Windage Adjustment, Total Capability (@ 100 yds.)*	Parallax/Focus	Length	Weight
4.5-14x3	2mm																	
201344	4.5-14x	45 mm	32 mm	39 mm	Ballistic Plex™		RFP	1 in.	Matte	17-6.3 ft.	3.75-5 in.	7.1-2.3 mm	1/8 MOA	30 in.	30 in.	7y to inf	11.3 in.	15.0 oz
*Example: 50 M	IOA is roughly 25 MOA	in any direction from	center														-	T

					-	6	1915	-									
Handg	un Scopes	Series			1		_								Ple	x	Ballistic Plex™
ltern	Magnification	Objective End Diameter	Clear Objective Diameter	Ocular End Diameter	Reticle	Focal Plane	Main Tube Size	Finish	Field of View (@ 100 yds.)	Eye Relief	Exit Pupil (Low to High)	Click Value (@ 100 yds.)	Elevation Adjustment, Total Capability (@ 100 yds.)*	Windage Adjustment, Total Capability (@ 100 yds.)*	Parallax/Focus	Length	Weight
2x20mm																	
200218	2x	27 mm	20 mm	35 mm	Plex	RFP	1 in.	Matte	21 ft.	10-24 in.	10 mm	1/2 in.	80 in.	80 in.		8.9 in.	7.0 oz.
200229	2x	27 mm	20 mm	35 mm	Plex	RFP	1 in.	Nickel	21 ft.	10-24 in.	10 mm	1/2 in.	80 in.	80 in.		8.9 in.	7.0 oz.
2-7x32n	ım																
200279	2-7x	39 mm	32 mm	38 mm	Ballistic Plex™	RFP	1 in.	Matte	21 ft. low -7 ft. high	11–21 in. Low 10–14 in. High	16-4.6 mm	1/4 in.	64 in.	64 in.		9.7 in.	13.0 oz.
200291	2-7x	39 mm	32 mm	38 mm	Plex	RFP	1 in.	Matte	21 ft. low-7 ft. high	11–21 in. Low 10–14 in. High	16-4.6 mm	1/4 in.	64 in.	64 in.		9.7 in.	13.0 oz.
200298	2-7x	39 mm	32 mm	38 mm	Plex	RFP	1 in.	Nickel	21 ft. low-7 ft. high	11–21 in. Low 10–14 in. High	16-4.6 mm	1/4 in.	64 in.	64 in.		9.7 in.	13.0 oz.
200299	2-7x	39 mm	32 mm	38 mm	Ballistic Plex™/Posi-Lock™	RFP	1 in.	Matte	21 ft. low-7 ft. high	11–21 in. Low 10–14 in. High	16-4.6 mm	1/4 in.	64 in.	64 in.		9.7 in.	13.0 oz.
3-12x32	mm																
200309	3-12x	44 mm	32 mm	38 mm	Ballistic Plex™	RFP	1 in.	Matte	14ft. low - 4ft. high	10–19 in. Low 10–12.5 in. High	11-2.7 mm	1/8 in.	28 in.	28 in.	7y to inf	10.8 in.	16.0 oz.
*Example: 50	MOA is roughly 25 M	OA in any direction fro	m center														





RastFire "3 with Speedbed" Shotyur Mount Raide Color Raide Colo	cfree 1.9 in. cfree 1.9 in. cfree 1.9 in.	Weight 1.9 oz 1.9 oz 1.9 oz 1.9 oz	8 MOA D Battery CR1632 CR1632 CR1632 CR1632	
Black Eagle II J Samp R MOA Date Red A date Benelli Super Black Eagle II J Gauge Unlimited I MOA I I SMOA B6 MOA Penallax Black Eagle II J Gauge Unlimited I MOA I 15 MOA B6 MOA Porallax Black Eagle II J Gauge Unlimited I MOA I 15 MOA B6 MOA Porallax Black Eagle II J Gauge Unlimited I MOA I 15 MOA B6 MOA Porallax Black Eagle II J Cauge Unlimited I MOA I 15 MOA B6 MOA Porallax Black Eagle II J Cauge Unlimited I MOA I 15 MOA B6 MOA Porallax Porallax Eagle II J Cauge Unlimited I MOA I 15 MOA B6 MOA Porallax Porallax Eagle II J Cauge Unlimited I MOA I 15 MOA B6 MOA Porallax Porallax Eagle II J Cauge Unlimited I MOA I 15 MOA B6 MOA Porallax Porallax Eagle II J Cauge Unlimited I MOA I 15 MOA B6 MOA Porallax Porallax Eag	cfree 1.9 in. cfree 1.9 in. cfree 1.9 in.	1.9 oz 1.9 oz 1.9 oz	CR1632 CR1632 CR1632 CR1632	
0.0201.07x2 lx15 mm8 MOA DotRedMateBenelli Super Black Eagle II 12 GaugeUnlimited1 MOA115 MOA86 MOAParallaxcolspan="4">colspan="4" colspan="4">colspan="4" colspan="4" colspan="4">colspan="4" colspan="4" colspa	c-free 1.9 in. c-free 1.9 in. c-free 1.9 in.	1.9 oz. 1.9 oz. 1.9 oz.	CR1632 CR1632 CR1632	
Addeds mourt and FastFire 3 integel 102, Montfefler, and Ultra Light 12 Gauge 00241 1.07x 21x15 mm 8 MOA Dot Red Matte Benelli M2, Montfefler, Ultra Light 12 Gauge Unlimited 1 MOA 115 MOA 86 MOA Parallax values mourt and FastFire 3 Sector Sector Sector Note Benetle ^m Xitema/2, 391, 391 Light, Utika/212 Gauge Unlimited 1 MOA 115 MOA 86 MOA Parallax values mourt and FastFire 3 Sector Sector Note Benetle ^m Xitema/2, 391, 391 Light, Utika/212 Gauge Unlimited 1 MOA 115 MOA 86 MOA Parallax values mourt and FastFire 3 Sector Sector Natte Benetle ^m Xitema/2, 391, 391 Light, Utika/212 Gauge Unlimited 1 MOA 115 MOA 86 MOA Parallax values mourt and FastFire 3 Sector Natte Remington [®] 870 12 Gauge Unlimited 1 MOA 115 MOA 86 MOA Parallax values mourt and FastFire 3 Sector Natte Remington [®] 870 12 Gauge Unlimited 1 MOA 115 MOA 86 MOA Parallax values mourt and FastFire 3 Sector Sector<	c-free 1.9 in. c-free 1.9 in. c-free 1.9 in.	1.9 oz. 1.9 oz. 1.9 oz.	CR1632 CR1632 CR1632	
Workerfeiters, wirter Light 12 Gauge Value Value 00241 1.07x 21x15 mm 8 MOA Dat Red • Matte Benelli M2, Montefeltro, Ultra Light 12 Gauge Valimited 1 MOA 115 MOA 86 MOA Parallax Values mouth fastifier Values m	cfree 1.9 in. cfree 1.9 in.	1.9 oz. 1.9 oz.	CR1632 CR1632	
002411.07x21x15 mm8 MOA DatRed•MatteBenelli M2, Montefeltro, Ultra Light 12 GaugeUnlimited1 MOA115 MOA86 MOAParallaxAugusta subscriptionAugusta subscription<	cfree 1.9 in. cfree 1.9 in.	1.9 oz. 1.9 oz.	CR1632 CR1632	
And uddes mouth and Fasifier 3 Serette's Xtreema/2, 391, 391 Light, and Utika/2 12 Gauge 20024 1.07x 2 1x15 mm 8 MOA Dat Red • Matte Berette [®] Xtrema/2, 391, 391 Light, Utika/2 12 Gauge Unlimited 1 MOA 115 MOA 86 MOA Parallax Returnington [®] 870 12 Gauge 200245 1.07x 2 1x15 mm 8 MOA Dat Red • Matte Remington [®] 870 12 Gauge Unlimited 1 MOA 115 MOA 86 MOA Parallax Returnington [®] 1100 and 1187 200248 1.07x 2 1x15 mm 8 MOA Dat Red • Matte Remington [®] 1100/1187 Unlimited 1 MOA 115 MOA 86 MOA Parallax Returnington [®] 1100 and 1187 200248 1.07x 2 1x15 mm 8 MOA Dat Red • Matte Remington [®] 1100/1187 Unlimited 1 MOA 115 MOA 86 MOA Parallax Returnington [®] 1100 and 1187 200248 1.07x 2 1x15 mm 8 MOA Dat Red • Matte Remington [®] 1100/1187 Unlimited 1 MOA 115 MOA 86 MOA Parallax Returnington [®] 1100 and 1187 20025 1.07x 2 1x15 mm 8 MOA Dat Red • Matte Remington [®] 1100/1187 Unlimited 1 MOA 115 MOA 86 MOA Parallax Returnington [®] 1100/1187 Unlimited 1 MOA 115 MOA 86 MOA Parallax Returnington [®] 1100/1187 Unlimited 1 MOA 115 MOA 86 MOA Parallax Returnington [®] 1100/1187 Unlimited 1 MOA 115 MOA 86 MOA Parallax Returnington [®] 1100/1187 Unlimited 1 MOA 115 MOA 86 MOA Parallax Returnington [®] 1100/1187 Unlimited 1 MOA 115 MOA 86 MOA Parallax Returnington [®] 100/1187 Unlimited 1 MOA 115 MOA 86 MOA Parallax	cfree 1.9 in. cfree 1.9 in.	1.9 oz. 1.9 oz.	CR1632 CR1632	
a single	cfree 1.9 in.	1.9 oz.	CR1632	
a gard gard gard gard gard gard gard gar	cfree 1.9 in.	1.9 oz.	CR1632	
002441.07x21x15 mm8 MOA DotRed•MotteBerete® Xtema/2, 391, 391 Light, Unika/212 GaugeUnlimited1 MOA115 MOA86 MOAParallaxRelining to "ST 12 GaugeVoldes mouries in stressVoldes mouries in stress <td col<="" td=""><td>cfree 1.9 in.</td><td>1.9 oz.</td><td>CR1632</td></td>	<td>cfree 1.9 in.</td> <td>1.9 oz.</td> <td>CR1632</td>	cfree 1.9 in.	1.9 oz.	CR1632
Added mouth Board Parallance Boar	cfree 1.9 in.	1.9 oz.	CR1632	
Remining the "Remining the "R	ofree 1.9 in.			
0.0245 1.07x 21x15 mm 8 MOA Dot Red • Matte Remington® 870 12 Gauge Unlimited 1 MOA 115 MOA 86 MOA Parallax Autor Saffire 3 Saffire 3 Unlimited 1 MOA 115 MOA 86 MOA Parallax Autor Saffire 3 Mathe 3 Mathe 3 Mathe 3 Mathe 3 Saffire 3 Saffire 3 Saffire 3	ofree 1.9 in.			
Andludes mount and FastFire 3 Remington® 1100 and 1187 800248 1.07x 21x15 mm 8 MOA Dot Red • Matte Remington® 1100/1187 Unlimited 1 MOA 115 MOA 86 MOA Parallax Includes mount and FastFire 3 Benetice® A400 Xplor 800253 1.07x 21x15 mm 8 MOA Dot Red • Matte Benetice® A400 Xplor Unlimited 1 MOA 115 MOA 86 MOA Parallax	ofree 1.9 in.			
termington® 1100 and 1187 100248 1.07x 21x15 mm 8 MOA Dot Red • Matte Remington® 1100/1187 Unlimited 1 MOA 115 MOA 86 MOA Parallax values watte Assertion® 1100/1187 Unlimited 1 MOA 115 MOA 86 MOA Parallax values watte Sector® Advo Value Natte Beretta® Advo Xplor Unlimited 1 MOA 115 MOA 86 MOA Parallax		1.9 oz.	CR1632	
300248 1.07x 21x15 mm 8 MOA Dot Red • Matte Remington® 1100/1187 Unlimited 1 MOA 115 MOA 86 MOA Parallax Andudes mount and FastFire 3 Seretta® A400 Xplor Value Note Parallax Parallax Benetta® A400 Xplor 107x 21x15 mm 8 MOA Dot Red • Matte Beretta® A400 Xplor Unlimited 1 MOA 115 MOA 86 MOA Parallax		1.9 oz.	CR1632	
Adudes mount and Fasifire 3 Heretta® A400 Xplor 1.07x 21x15 mm 8 MOA Dot Red • Matte Beretta® A400 Xplor Unlimited 1 MOA 115 MOA 86 MOA Parallax		1.9 oz.	CR1632	
Beretta® A400 Xplor 000253 1.07x 21x15 mm 8 MOA Dot Red 	-free 1.9 in.			
00253 1.07x 21x15 mm 8 MOA Dot Red • Matte Beretta® A400 Xplor Unlimited 1 MOA 115 MOA 86 MOA Parallax	-free 1.9 in.			
	-free 1.9 in.			
d de un de la march		1.9 oz.	CR1632	
Dracle" Bow Sight				
tem Max trajactory angle Laser Range (reflective) Laser Range (non-reflective) Operating temp Weight Battery life				
300400 176 MOA 500y 200y -10'F to 140'F 17 oz. CR123 1000-2000 cycles				
Droptine® Binocular Series				
Field of View Objective Exit Pupil Eye Relief IP Distance Range (Low to High,				
Objective Exit Pupil Eye Relief IP Distance Range (Low to High, Item Magnification Diameter Focus System Optics System Close Focus (feet) (mm) (inches) (mm) @ 1000 yds.) Eyecups Waterproof Depth Weight (oz.)	Dimensions (in.)			
8x42mm				
300290 8x 42mm Fast Focus Roof Prism 7 5.25 0.72 57-74 340 Adjustable, Aluminum 1 meter 20.1	5.6x4.8x2.0			
10x42mm				
300291 10x 42mm Fast Focus Roof Prism 7 4.20 0.65 57-74 300 Adjustable, Aluminum 1 meter 20,1	5.6x4.8x2.0			
DROPTINE SERIES Prism: BaK-4, phase corrected coating, dielectric coated Lenses: Hi-Lume, Index-matched, fully multi-coated Body: Nitrogen filled				
Signature HD® Binocular Series				
Objective Field of View Utem Mognification Diameter Focus System Optics System Close Focus (feet) IP Diatance Range (Low to High, New Mognification Diameter Focus System Optics System Close Focus (feet) (mm) @ 1000 yds,) Eyecups Waterproof Depth Weight (az.)	Dimensions (in.)	-		

ltern	Magnification	Objective Diameter	Focus System	Optics System	Close Focus (feet)	Exit Pupil (mm)	Eye Relief (inches)	IP Distance Range (mm)	(Low to High, @ 1000 yds.)	Eyecups	Waterproof Depth	Weight (oz.)	Dimensions (in.)	
8x42mm														
300292	8x	42mm	Fast Focus	HD Roof Prism	8.2	5.25	0.77	57-74	330	Adjustable, Aluminum	1 meter	23.2	5.8x5.0x2.0	
10x42mm														
300293	10x	42mm	Fast Focus	HD Roof Prism	8.2	4.20	0.61	57-74	314	Adjustable, Aluminum	1 meter	23.2	5.8x5.0x2.0	
12x50mm														
300294	12x	50mm	Fast Focus	HD Roof Prism	13.1	4.16	0.61	57-74	251	Adjustable, Aluminum	1 meter	24.3	6.5x5.1x2.3	

SIGNATURE HD SERIES Prism: BaK-4, phase corrected coating, dielectric coated Lenses: High-grade HD glass, Hi-Lume, Index-matched, fully multi-coated Body: Open bridge, Nitrogen filled

78 TACTICAL SPECIFICATIONS

				1														
XTR III **	Riflescope	1338°. C		-	-		1463.6	1	1	0.00.01	N. S. S.	N	- Sat Lower	the state	SCR™ N	AIL SCRT	± ™ MOA	SCR2 MIL
) Jiem	Magnification	Objective End Diameter	Clear Objective Diameter	Ocular End Diameter	Reticle	Focal Plane	Main Tube Size	Finish		Field of View (Low to High, @ 100 yds.)	Eye Relief	Exit Pupil (Low to High)	Click Value	Elevation Adjustment, Total Capability*	Windage Adjustment, Total Capability*	Parallax/ Focus	Length	Weight
3.3-18x50	mm	82. 23k			0.200	10.000				PROFILE ST	C.V	5.27 M	10.0031.057	223 To 24		35 (0)149	192	44.25
201200	3.3-18x	58 mm	50 mm	44.25 mm	SCR MIL	FFP	34 mm	Matte		37.5–6.8 ft.	3.25 – 4 in.	8.6-2.7	1/10 mil or 1/4 MOA*	120 MOA/35 mil	55 MOA/16 mil	25y to inf	13.3	29.8 oz.
201201	3.3-18x	58 mm	50 mm	44.25 mm	SCR MOA	FFP	34 mm	Matte	3	37.5–6.8 ft.	3.25 - 4 in.	8.6-2.7	1/10 mil or 1/4 MOA*	120 MOA/35 mil	55 MOA/16 mil	25y to inf	13.3	29.8 oz.
201202	3.3-18x	58 mm	50 mm	44.25 mm	SCR2 MIL	FFP	34 mm	Matte		37.5–6.8 ft.	3.25 – 4 in.	8.6-2.7	1/10 mil or 1/4 MOA*	120 MOA/35 mil	55 MOA/16 mil	25y to inf	13.3	29.8 oz.
5.5-30x50	mm		2.01.5.1				14.114		210.					- S			1.15.15	2.2.27
201210	5.5-30x	63.5 mm	56 mm	44.25 mm	SCR MIL	FFP	34 mm	Matte		23-4.2 ft.	3.25 – 4 in.	8.6-1.8	1/10 mil or 1/4 MOA*	90 MOA/26mil	55 MOA/16 mil	20y to inf	15.4	32 oz.
201211	5.5-30x	63.5 mm	56 mm	44.25 mm	SCR MOA	FFP	34 mm	Matte	140.1	23-4.2 ft.	3.25 - 4 in.	8.6-1.8	1/10 mil or 1/4 MOA*	90 MOA/26mil	55 MOA/16 mil	20y to inf	15.4	32 oz.
201212	5.5-30x	63.5 mm	56 mm	44.25 mm	SCR2 MIL	FFP	34 mm	Matte	1.1	23-4.2 ft.	3.25 – 4 in.	8.6-1.8	1/10 mil or 1/4 MOA*	90 MOA/26mil	55 MOA/16 mil	20y to inf	15.4	32 oz.
*See reticle option a	nd match up	1.2.2.1						5							1.1.1.1.1.2.1.1	54 50	2300	20 0

100				_	8 1	in in		18-						($\left(\right)$) (
XTR II"	Riflesco	pes Serie	es			<u>0</u> =			2311		1.11	Taxa and the state	G2B Mil-Dot™		SCRTM MOA	F-Class MOA	Horus® H591™	Ballistic Circle Dot™	Ballistic	Dot™	F-Class DC
Item	Magnification	 Objective End 	Clear	Ocular End Diameter	Reticle	Illumination	Focal Plane	Main Tube Size	Finish	Field of View (Low to High, @ 100 yds.)	Eye Relief	Exit Pupil (Low to High)	Click Value	Knob Style - Elevation*	Knob Style – Windage*	Elevation Adjustment, Total Capability*	Windage Adjustment, Total Capability*	Parallax/Focus	Length	Weight	Battery
1-8x24r			_					-		,	-,	(E CAL								,
201018	1-8x	34 mm	24 mm	44.25 mm	Ballistic Circle Dot		FFP	34 mm	Matte	105–12.5 ft .	3.50 - 4.00 in.	12-3 mm	1/10 mil	MAD/LT/Z/E	MAD/LC/Z	30 Mil/103 MOA	30 Mil/103 MOA	Support 1	10.75 in.	24.4 oz.	CR2032
201019	1-8x	34 mm	24 mm	44.25 mm	Ballistic Dot	S	RFP	34 mm	Matte	105 – 12.5 ft .	3.50 - 4.00 in.	12-3 mm	1/10 mil	MAD/LT/Z/E	MAD/LC/Z	30 Mil/103 MOA	30 Mil/103 MOA		10.75 in.	24.4 oz.	CR2032
2-10x42	2mm														1211	11 20 10			3.00		
201022	2-10x	49.5 mm	42 mm	44.25 mm	SCR™ MOA		FFP	34 mm	Matte	52-10.5 ft.	3.50 – 4.25 in.	12-4.2 mm	1/4 MOA; 100-click knob	π/z	π/z	90 MOA	55 MOA	50y to inf	13.5 in.	22.7 oz.	CR2032
201023	2-10x	49.5 mm	42 mm	44.25 mm	G2B Mil-Dot™		FFP	34 mm	Matte	52-10.5 ft.	3.50 - 4.25 in.	12-4.2 mm	1/10 mil; 80-click knob	π/z	π/z	26.2 Mils/90 MOA	16 Mils/55 MOA	50y to inf	13.5 in.	22.7 oz.	CR2032
3-15x50										11.11					ALC: N	2754 A. +	S.S.	P4		NE.	
201031	3-15x	58 mm	50 mm	44.25 mm	SCR™ MIL	•	FFP	34 mm	Matte	36-7.5 ft.	3.50 – 4.25 in.	16-3.3 mm	1/10 mil; 100-dick knob	π/z	π/z	32 Mils/110 MOA	16 Mils/55 MOA	50y to inf	14.1 in.	30.9 oz.	CR2032
201032	3-15x	58 mm	50 mm	44.25 mm	SCR™ MOA	•	FFP	34 mm	Matte	36-7.5 ft.	3.50 – 4.25 in.	16-3.3 mm	1/4 MOA; 100-click knob	π/z	π/z	110 MOA	55 MOA	50y to inf	14.1 in.	30.9 oz.	CR2032
201033	3-15x	58 mm	50 mm	44.25 mm	G2B Mil-Dot™	•	FFP	34 mm	Matte	36-7.5 ft .	3.50 – 4.25 in.	16-3.3 mm	1/10 mil; 100-dick knob	π/z	π/z	32 Mils/110 MOA	16 Mils/55 MOA	50y to inf	14.1 in.	30.9 oz.	CR2032
201034	3-15x	58 mm	50 mm	44.25 mm	SCR™ MIL		FFP	34 mm	Matte	36-7.5 ft.	3.50 - 4.25 in.	16-3.3 mm	1/10 mil; 100-dick knob	Π/Z	π/z	32 Mils/110 MOA	16 Mils/55 MOA	50y to inf	14.1 in.	30.9 oz.	CR2032
4-20x50	Omm				1. 18										12 3 3	ARCHE Day		A COLOR		1.1	
201041	4-20x	58 mm	50 mm	44.25 mm	Horus [®] H591™	•	FFP	34 mm	Matte	25.8-5.4 ft.	3.50 - 4.25 in.	12-2.5 mm	1/10 mil; 100-dick knob	π/z	π/z	26.2 Mils/90 MOA	16 Mils/55 MOA	50y to inf	14.9 in.	30.9 oz.	CR2033
201042	4-20x	58 mm	50 mm	44.25 mm	SCR™ MIL	· · · ·	FFP	34 mm	Matte	25.8-5.4 ft.	3.50 - 4.25 in.	12-2.5 mm	1/10 mil; 100-dick knob	Π/Z	π/z	26.2 Mils/90 MOA	16 Mils/55 MOA	50y to inf	14.9 in.	30.9 oz.	CR2032
201043	4-20x	58 mm	50 mm	44.25 mm	SCR™ MOA		FFP	34 mm	Matte	25.8-5.4 ft.	3.50 - 4.25 in.	12-2.5 mm	1/4 MOA; 100-click knob	π/z	π/z	90 MOA	55 MOA	50y to inf	14.9 in.	30.9 oz.	CR2032
201044	4-20x	58 mm	50 mm	44.25 mm	G2B Mil-Dot™	•	FFP	34 mm	Matte	25.8-5.4 ft.	3.50 - 4.25 in.	12-2.5 mm	1/10 mil; 100-dick knob	π/z	π/z	26.2 Mils/90 MOA	16 Mils/55 MOA	50y to inf	14.9 in.	30.9 oz.	CR2032
201045	4-20x	58 mm	50 mm	44.25 mm	SCR™ MIL		FFP	34 mm	Matte	25.8-5.4 ft.	3.50 - 4.25 in.	12-2.5 mm	1/10 mil; 100-dick knob	π/z	π/z	26.2 Mils/90 MOA	16 Mils/55 MOA	50y to inf	14.9 in.	30.9 oz.	CR2032
5-25x50)mm																				
201051	5-25x	58 mm	50 mm	44.25 mm	SCR™ MIL	•	FFP	34 mm	Matte	21-4.3 ft.	3.50 – 4.25 in.	10-2.0 mm	1/10 mil; 100-dick knob	π/z	π/z	26.2 Mils/90 MOA	16 Mils/55 MOA	50y to inf	16.3 in.	32.1 oz.	CR2032
201052	5-25x	58 mm	50 mm	44.25 mm	SCR™ MOA	Det is	FFP	34 mm	Matte	21-4.3 ft.	3.50 - 4.25 in.	10-2.0 mm	1/4 MOA; 100-click knob	π/z	π/z	90 MOA	55 MOA	50y to inf	16.3 in.	32.1 oz.	CR2032
201053	5-25x	58 mm	50 mm	44.25 mm	G2B Mil-Dot™	•	FFP	34 mm	Matte	21-4.3 ft.	3.50 – 4.25 in.	10-2.0 mm	1/10 mil; 100-dick knob	π/z	π/z	26.2 Mils/90 MOA	16 Mils/55 MOA	50y to inf	16.3 in.	32.1 oz.	CR2032
201054	5-25x	58 mm	50 mm	44.25 mm	SCR™ MIL		FFP	34 mm	Matte	21-4.3 ft.	3.50 – 4.25 in.	10-2.0 mm	1/10 mil; 100-dick knob	Π/Z	π/z	26.2 Mils/90 MOA	16 Mils/55 MOA	50y to inf	16.3 in	32.1 oz.	CR2032
201056	5-25x	58 mm	50 mm	44.25 mm	SCR™ MIL	•	FFP	34 mm	FDE	21-4.3 ft.	3.50 – 4.25 in.	10-2.0 mm	1/10 mil; 100-dick knob	π/z	π/z	26.2 Mils/90 MOA	16 Mils/55 MOA	50y to inf	16.3 in	32.1 oz.	CR2032
8-40x50	Omm																				
201080	8-40x	58 mm	50 mm	44.25 mm	F-Class MOA	•	FFP	34 mm	Matte	13.2-2.8 ft.	3.50 – 4.25 in.	6.25-1.25 mm	1/8 MOA; 80-click knob	Π/Z	π/z	70 MOA	30 MOA	50y to inf	16.7 in.	31.4 oz.	CR2032
201081	8-40x	58 mm	50 mm	44.25 mm	F-Class DCH		RFP	34 mm	Matte	13.2-2.8 ft.	3.50 - 4.25 in.	6.25-1.25 mm	1/8 MOA; 80-click knob	Π/Z	π/z	70 MOA	30 MOA	50y to inf	16.7 in.	31.4 oz.	N/A
	MOA is roughly 2	25 MOA from cen	ter										S 00 7 1								
		1	and the second																		

*Knob Style Codes MAD = M.A.D. System LC = Low, Capped Knob LT - Low, Single-Turn Tactical Knob TC - Tall, Capped Knob TT - Tall, Multi-Turn Tactical Knob Z - Zero Click Stop E - Extra Low, Capped Knob (included in box)

million	12220	24.20	CONTRACT OF			요구의 문									and the second				\frown
					12.0.2		1.1												······
							8 <u>-</u>	-	-										Ť.
TAC [™] Ri	flescopes S	ieries	N. S.	25			-								Trail St.	30.00	Ballistic CG) тм	Ballistic AR™
m	Magnification	Objective End Diameter	Clear Objective Diameter	Ocular End Diameter	Reticle	Illumination	Focal Plane	Main Tube Size	Finish	Field of View (Low to High, @ 100 yds.)	Eye Relief	Exit Pupil (Low to High)	Click Value	Elevation Adjustment, Total Capability*	Windage Adjustment, Total Capability*	Parallax/Focus	Length	Weight	Battery
-4x24mm	1.1	1 .	1.01		ALCONTO			1000											TIC-10
00437	1-4x	30 mm	24 mm	42 mm	Ballistic CQ™	•	RFP	30 mm	Matte	100-32 ft.	3.5-4.0 in.	24-32 mm	1/2 MOA	130 MOA	130 MOA		11.3 in.	14.5 oz.	CR2032
00426	1-4x	30 mm	24 mm	42 mm	Ballistic AR™	5 · · ·	RFP	30 mm	Matte	100-32 ft.	3.5-4.0 in.	24-32 mm	1/2 MOA	130 MOA	130 MOA		11.3 in.	14.5 oz.	CR2032
-4x24mm	Tactical Kit																		
00437-FF	1-4x	30 mm	24 mm	42 mm	Ballistic CQ™	12.0	RFP	30 mm	Matte	100-32 ft.	3.5-4.0 in.	24-32 mm	1/2 MOA	130 MOA	130 MOA		11.3 in.	25.0 oz.	CR2032
00426-FF	1-4x	30 mm	24 mm	42 mm	Ballistic AR™	• • 1	RFP	30 mm	Matte	100 - 32 ft.	3.5-4.0 in.	24 - 32 mm	1/2 MOA	130 MOA	130 MOA		11.3 in.	25.0 oz.	CR2032
actical kit inclu	des scope, FastFire	™ 3, and AR-P.E.P.	R.™ Mount	and the															
.5-6x42mi	n																		
00429	1.5-6x	46 mm	42 mm	39 mm	Ballistic CQ™	10.0	RFP	30 mm	Matte	33–13 ft .	3.1-3.8 in.	27 – 7 mm	1/2 MOA	80 MOA	80 MOA		12.2 in.	15.5 oz.	
00439	1.5-6x	46 mm	42 mm	39 mm	Ballistic AR™		RFP	30 mm	Matte	33–13 ft .	3.1-3.8 in.	27 – 7 mm	1/2 MOA	80 MOA	80 MOA		12.2 in.	15.5 oz.	

FullField	TAC30™ Rif	lescopes Se	eries		232.16		-	-	-									210 3	Ballistic CQ™
ltern	Magnification	Objective End Diameter	Clear Objective Diameter	Ocular End Diameter	Reticle	Illumination	Focal Plane	Main Tube Size	Finish	Field of View (Low to High, @ 100 yds.)	Eye Relief	Exit Pupil (Low to High)	Click Value	Elevation Adjustment, Total Capability*	Windage Adjustment, Total Capability*	Parallax/ Focus	Length	Weight	Battery
1-4x24mm	of the set	1.1.1.1.1.1	1000	1 - 18	10.00 March 10.00	in the Orly		1.11	1000	1	12 (Mar.)		1 A A			201	120484	Servic.	1.11
200433	1-4x	30 mm	24 mm	42 mm	Ballistic CQ™	•	RFP	30 mm	Matte	100-32 ft.	3.5-4.0 in.	24-6 mm	1/2 MOA	130 MOA	130 MOA		11.3 in.	17.0 oz.	CR2032
1-4x24mm	Tactical Kit									Server 1									
200433-FF	1-4x	30 mm	24 mm	42 mm	Ballistic CQ™		RFP	30 mm	Matte	100-32 ft.	3.5-4.0 in.	24-6 mm	1/2 MOA	130 MOA	130 MOA		11.3 in.	25.0 oz.	CR2032

						1.11		-											/ /***** <mark>0</mark> ** *
T-6 Rifle	escopes [™] Se	eries				_	Q.			600)					110	in an			Ballistic AF
em	Magnification	Objective End Diameter	Clear Objective Diameter	Ocular End Diameter	Reticle	Illumination	Focal Plane	Main Tube Size	Finish	Field of View (Low to High, @ 100 yds.)	Eye Relief	Exit Pupil (Low to High)	Click Value	Elevation Adjustment, Total Capability*	Windage Adjustment, Total Capability*	Parallax/Focus	Length	Weight	Battery
-6X24mn																10.00		1.2.2.2.2	1515
00472	1-6x	30 mm	24 mm	46 mm	Ballistic AR™	•	RFP	30mm	Matte	106-18.5 ft.	3.3-4.0 in.	11.5-5.2 mm	1/2 MOA	80 MOA	80 MOA		10.3 in.	17.4 oz.	CR20
-6X24mn	Tactical Kit																		
00475	1-6x	30 mm	24 mm	46 mm	Ballistic AR™	•	RFP	30mm	Matte	106-18.5 ft.	3.3-4.0 in.	11.5-5.2 mm	1/2 MOA	80 MOA	80 MOA		10.3 in.	25.4 oz.	CR20
		e™ 3, and AR-P.E																	

TACTICAL SPECIFICATIONS

				4 ×		dist.	R								j S' ₩		
AR Rifles	copes [™] Sei _{Magnification}	ries Objective End Diameter	Clear Objective Diameter	Ocular End Diameter	Reide	Focal Plane	Main Tube Size	Finish	Field of View (Low to High, @ 100 yds.)	Eye Relief	Exit Pupil (Low to High)	Click Value	Elevation Adjustment, Total Capability*	Windage Adjustment, Total Capability*	Parallax/Focus	Length	C4 Wind MOA ^T Weight
4.5-14x42	mm	11111	Street.		1	1.1			1.201.045.02	1.1.1			0° 1° 1	10.20.1	345. 2	0.200%	11. 11
200333	4.5-14x	56 mm	42 mm	39 mm	C4 Wind MOA™ 5.56	RFP	1 in.	Matte	22-7.5 ft.	3.1-3.8 in.	9-3 mm	1/4 MOA	42 MOA	42 MOA	50y to inf	13.0 in.	18.0 oz.
200334	4.5-14x	56 mm	42 mm	39 mm	C4 Wind MOA™ 7.62	RFP	1 in.	Matte	22-7.5 ft.	3.1-3.8 in.	9-3 mm	1/4 MOA	42 MOA	42 MOA	50y to inf	13.0 in.	18.0 oz.
*Example: 50 MC	A is roughly 25 MOA	in any direction from c	center	20			8 34									1.1	1.7.

MSR Rifle	escopes [™] Se	eries			A COLUMN TWO IS NOT				(- trim)	1.							
ltem	Magnification	Objective End Diameter	Clear Objective Diameter	Ocular End Diameter	Reticle	Focal Plane	Main Tube Size	Finish	Field of View (Low to High, @ 100 yds.)	Eye Relief	Exit Pupil (Low to High)	Click Value	Elevation Adjustment, Total Capability*	Windage Adjustment, Total Capability*	Parallax/Focus	Length	Ballistic Plex™ Weight
3-9x40mm	Constant of the					12	1	Services.	and the second			1. 2. 3	C.F. Tell	1.1.1.1		1.1.1	19-14 St.
200137	3-9x	48 mm	40 mm	39 mm	Ballistic Plex™ .223	RFP	1 in.	Matte	33-13 ft.	3.1-3.8 in.	13-5 mm	1/4 MOA	52 MOA	52 MOA		12.2 in.	13.0 oz.
4.5-14x42	mm	10.55				11.2.1	=110	11111	Cintre 2				46 H 19				64
200195	4.5-14x	56 mm	42 mm	39 mm	Ballistic Plex™ .223	RFP	1 in.	Matte	22-7.5 ft.	3.1-3.8 in.	9-3 mm	1/4 MOA	42 MOA	42 MOA	50y to inf	13.0 in.	18.0 oz.

***** +**** +***

ŧ




T.M.P.R	. Series			Mark Street Street	1200	-	NO.	11-15			11/1/19 88	-9.81FE	B. States	Ballistic 3X™	Ballis	stic AR™	3 MC	DA Dot
ltem	Magnification	Clear Objective Diameter	Reticle	Reticle Color(s)	Illumination	Finish	Mount	Field of View (@ 100 yds.)	Close Focus	Eye Relief	Click Value (MOA)	Height Above Rail to Optic Centerline	Elevation Adjustment, Total Capability*	Windage Adjustment, Total Capability*	Parallax/Focus (@ 100 yds.)	Length [†]	Weight	Battery
T.M.P.R. 3	3 ™	1.1		11.03501		21		212.26	210163	- 51.5	2011/03	28.51	STATE HOT	- Series			1.1.1.4	8.5
300224	3x	32mm	Ballistic 3X™	Black; red; green; blue	•	Matte	Picatinny Rail Base, AR-QD Mount	40	10 ft.	2.5 in.	0.5	1.53 in.	80 MOA	80 MOA	ALL ALL	5.6 in.	18.2 oz.	CR123
T.M.P.R. 3	3™ Tactical Kit												10.52.530.5		The second			2423
300228	3x	32mm	Ballistic 3X™	Black; red; green; blue	•	Matte	Picatinny Rail Base, AR-QD Mount	40	10 ft .	2.5 in.	0.5	1.53 in.	80 MOA	80 MOA	TOR SI	5.6 in.	18.2 oz.	CR123
Tactical kit in	ncludes T.M.P.R. 3,	T.M.P.R. Fastfire M3	and T.M.P.R. Laser	Sight														
T.M.P.R. 5	5™																	
300226	5x	32mm	Ballistic AR™	Black; red; green; blue	•	Matte	Picatinny Rail Base, AR-QD Mount	24	25 ft.	2.2 in.	0.25	1.53 in.	50 MOA	50 MOA		6 in.	19.1 oz.	CR123
T.M.P.R.™	' Tactical Kit																	
300229	5x	32mm	Ballistic AR™	Black; red; green; blue		Matte	Picatinny Rail Base, AR-QD Mount	24	25 ft.	2.2 in.	0.25	1.53 in.	50 MOA	50 MOA		6 in.	19.1 oz.	CR123
Tactical kit in	ncludes T.M.P.R. 5,	T.M.P.R. Fastfire M3	and T.M.P.R. Laser	Sight														
T.M.P.R. F	astfire M3™																	
3000238		21x15mm	3 MOA	Red	•	Matte	TMPR Direct Mount			Unlimited	1.0	0.5 in.	115 MOA	86 MOA	Parallax-Free	1.9 in.	1.0 oz.	CR1632
T.M.P.R. I	aser Sight™																	
300221			5 Mil	Red		Matte	TMPR Direct Mount						60 MOA	60 MOA		4.00 in.	12.00 oz.	LR43

*Example: 50 MOA is roughly 25 MOA in any direction from center [†]Length without sunshade or flip-up covers

- 88		-	ia .
-12	-	_	- 10
10 CC			
	1		
1000	-	_	

and the second	10.4000												ALC: NOT ALC: Your	100 B 11111 S			
	1.21.4.5.2.3	P. S. S. Walder					(18) (N										3.
	Det .			2.28									~	\sim	\frown		\frown
					and a state	- 19 M											
	38.	1015 10										(++++++	+·····	•••••••••••••••••••••••••••••••••••••••			
	ine little	and the second			-	and the second s	1.1.1						Ť	Ť			
R Sights Series			9	-								Ball	istic 3X™ Bo	allistic AR TM	Ballistic CQ™	Balli	listic CQ™-1X
m Magnification	Clear Objective Diameter	Reticle	Reticle Color(s)	Illumination	Finish	Mount	Field of View (@ 100 yds.)	Close Focus	Eye Relief	Click Value	Height Above Rail to Optic Centerline	Elevation Adjustment, Total Capability*	Windage Adjustment, Total Capability*	Parallax/Focus (@ 100 yds.)	Length [†]	Woight	Battery
R-1X™	Didmeler	Kelicle	Kelice Color(s)	momination	TINISH	Mouri	(er 100 yds.)	TOCUS	Lye Kellel	Click volue	Cemenne	iolai Capability	iolai Capability	(e 100 yds.)	Lengin.	weigili	builery
00214 1x	20 mm	Ballistic CQ™-1X	Black; red; green	•	Matte	Picatinny Rail Base	75 ft.	18 in.	2.7 in.	1/2 MOA	1.6 in.	120 MOA	120 MOA		4.00 in.	13.20 oz.	AA
R-1X™ Tactical Kit		10 M	14 C														
00219 1x	20 mm	Ballistic CQ™-1X	Black; red; green	· · .	Matte	Picatinny Rail Base	75 ft .	18 in.	2.7 in.	1/2 MOA	1.6 in.	120 MOA	120 MOA		8.00 in.	25.20 oz.	AA
ctical kit includes sight, AR-Tr	ripler™, and AR-Piv	vot Ring™, Quick Detac	h														
R-332™																	
00208 3x	32 mm	Ballistic CQ™	Black; red; green	m • S * 1	Matte	Picatinny Rail Base, AR-QD Mount	32 ft.	9 ft.	2.5 in.	1/2 MOA	1.6 in.	80 MOA	80 MOA		5.30 in.	14.20 oz.	CR2032
00217 3x	32 mm	Ballistic AR™	Black; red; green	· · ·	Matte	Picatinny Rail Base, AR-QD Mount	32 ft.	9 ft.	2.5 in.	1/2 MOA	1.6 in.	80 MOA	80 MOA		5.30 in.	14.20 oz.	CR2032
R-332™ Tactical Kit	1. 1.8.1	1.1.1															
0222 3x	32 mm	Ballistic CQ™	Black; red; green		Matte	Picatinny Rail Base, AR-QD Mount	32 ft.	9 ft.	2.5 in.	1/2 MOA	1.6 in.	80 MOA	80 MOA		5.80 in.	15.70 oz.	CR2032
tical kit includes sight, FastF	ire 2, and ARD	19 22 20															
8-536™																	
0210 5x	36 mm	Ballistic CQ™	Black; red; green	Q	Matte	Picatinny Rail Base, AR-QD Mount	20 ft.	25 ft.	2.5-3.5 in.	1/3 MOA	1.6 in.	70 MOA	70 MOA		5.80 in.	18.75 oz.	CR2032
0218 3x	36 mm	Ballistic AR™	Black; red; green	•	Matte	Picatinny Rail Base, AR-QD Mount	20 ft.	25 ft.	2.5-3.5 in.	1/3 MOA	1.6 in.	70 MOA	70 MOA		5.80 in.	18.75 oz.	CR2032
R-536™ Tactical Kit	No min																
0223 5x	36 mm	Ballistic CQ™	Black; red; green		Matte	Picatinny Rail Base, AR-QD Mount	20 ft.	25 ft.	2.5-3.5 in.	1/3 MOA	1.6 in.	70 MOA	70 MOA		6.25 in.	20.25 oz.	CR2032
ctical kit includes sight, FastF	ire 2, and ARD													97 — J			
R-Tripler™		Contraction of the				Carl West Trans	the set of	1.563					10.04230.010		11.2	112 27	
0213 3× R-Tripler™ Combo Pac	25 mm				Matte		44 ft.	3 ft.	2.5 in.			80 MOA	80 MOA		4.00 in.	6.40 oz.	1 1 1
0216 3x	25 mm				Matte	AR-Pivot Ring™, Quick Detach	44 ft.	3 ft.	2.5 in.		1.6 in.	80 MOA	80 MOA		4.00 in.	12.00 oz.	distant.
		0.10.1			Mulle	AN INFO MING , QUICK DEIDEIT	444 11.	511.	2.3 m.		1.0 III.	CO MOA	00 MOA		4.00 ml.	12.00 02.	and the
ombo package includes sight xample: 50 MOA is roughly 25 MC	and the second states				1.11	it and the second second	10 10 3						A Start	dimension in			025



				of the owner where the owner w											_
FastFire [™] 9	Series	- N		COLUMN TO A			1.20				3 MO.	A Dot	4 MOA Dot	8 MOA Dot	4
ltem	Clear Objective Diameter	Reticle	Reticle Color(s)	Illumination	Finish	Mount	Eye Relief	Click Value	Elevation Adjustment, Total Capability*	Windage Adjustment, Total Capability*	Parallax/Focus	Length	Weight	Battery	
FastFire™ 2		1000					all and the				R. U. M. S		1.	10000	2.2
300232	21x15 mm	4 MOA Dot	Red		Matte	Picatinny Mount	Unlimited		115 MOA	86 MOA	Parallax-free	1.8 in.	1.50 oz.	CR2032	
300233	21x15 mm	4 MOA Dot	Red		Matte		Unlimited		115 MOA	86 MOA	Parallax-free	1.8 in.	0.90 oz.	CR2032	
FastFire™ 3															
300234	21x15 mm	3 MOA Dot	Red	•	Matte	Picatinny Mount	Unlimited	1 MOA	115 MOA	86 MOA	Parallax-free	1.9 in.	1.50 oz.	CR1632	
300235	21x15 mm	3 MOA Dot	Red	•	Matte		Unlimited	1 MOA	115 MOA	86 MOA	Parallax-free	1.9 in.	0.90 oz.	CR1632	
300236	21x15 mm	8 MOA Dot	Red	•	Matte	Picatinny Mount	Unlimited	1 MOA	115 MOA	86 MOA	Parallax-free	1.9 in.	1.50 oz.	CR1632	
300237	21x15 mm	8 MOA Dot	Red	•	Matte		Unlimited	1 MOA	115 MOA	86 MOA	Parallax-free	1.9 in.	0.90 oz.	CR1632	
AR-F3™												Class.			
300215	21x15 mm	3 MOA Dot	Red	•	Matte	Picatinny Rail Base	Unlimited	1 MOA	115 MOA	86 MOA	Parallax-free	2.0 in.	4.60 oz.	CR1632	
*Example: 50 MOA	is roughly 25 MOA from center														31

Burris GEAR

Style up with the latest Burris apparel and give yourself the performance edge with these quality Burris accessories.

VISIT OUR NEW ONLINE STORE TO FIND THE LATEST BURRIS BRANDED ITEMS!

WWW.BURRISOPTICS.COM/GEAR



SCOPE TUBE LEVEL

Item Number: 626006



Fullfield II™, Fullfield E1™, MTAC™ 6.5-20x - Matte, 3 in. Fullfield II™, Fullfield E1™, MTAC™ 4.5-14x - Matte, 3 in.



BURRIS TARGETS

Item Number: 626001

			100	
		100		
	1		1	
1	1			
10		<i>w</i> -		

LENS PEN

Item Number: 626050

OFFICIAL **BURRIS APPAREL**

Visit our online store for all your Burris branded apparel and more!



NECK RELIEF BINOCULAR STRAP

Item Number: 300157

BURRIS SCOPE COVER

ltern	Details
626061	Small 8.5 to 10.5 in. Objective bells to 39 mm
626062	Medium 10.5 to 13 in. Objective bells to 48 mm
626063	Large 13 to 17 in. Objective bells to 61 mm

BURRIS FOREVER WARRANTY™

Every Burris optic is covered by the Burris Forever Warranty[™]. We will repair or replace your Burris optic if it is damaged or defective. The warranty is automatically transferred to future owners.

- No repair or replacement charge
- No questions asked
- No warranty card needed
- No receipt needed



LEGAL INFORMATION

The following are trademarks of Burris Company, Inc.: AR Riflescopes[™], AR Riflescope[™], AR-1X[™], AR-332[™], AR-536[™], AR-F3[™], AR-P.E.P.R.[™], AR-Pivot Ring[™], Quick Detach, AR-Tripler[™], Ballistic CQ[™], Ballistic CQ[™]-1X, Ballistic Mil-Dot, Ballistic Plex E1[™], Ballistic Plex E1[™] FFP, Ballistic Plex E1[™] FFP Varmint, Ballistic Plex E1[™] MV, Ballistic Plex[™], Ballistic AR[™], Ballistic Circle Dof[™], Ballistic Dof[™], Burris[®], C4 Plus[™], C4 Wind MOA[™], Double Dovetail[™], Droptine[™], Ballistic AR[™], Ballistic Circle Dof[™], Ballistic Dof[™], Burris[®], C4 Plus[™], C4 Wind MOA[™], Double Dovetail[™], Droptine[™], Electro-Dot[™], Eliminator[®] III LaserScope[®] Series, FastFire[™] II, FastFire[™] III, FastFire[™], Forever Warranty[™], FourX[™], Fullfield E1[™], Fullfield TAC30[™], G2B Mil-Dot[™], High Country[™], Hilume[™], Horus[®] H591[™], Long-Range MOA, LRS[™], MSR Riflescopes[™], MTAC[™], Oracle[™], SCR[™] Mil, SCR[™] MOA, Signature Rings[™], SkullTac[™], SpeedBead[™], StormCoat[™], T.M.P.R[™], Timberline[™], Veracity[™], WindMap[™], XTR II[™], XTR III[™], XTR Signature Rings[™], Signature HD[™], Xtreme Tactical[™] Bases, Xtreme Tactical[™] Rings, XTS-2575[™].

The following firearm brand and model names are registered trademarks of their respective owners: Benelli Super Black Eagle, Super Black Eagle II, M1, M2, Montefeltro, Ultra Light, Super Nova, R1, ARGO, Legacy, Sport II, Super Sport, Cordoba; Beretta 92, 96, 90-TWO, Cougar, PX4 Storm; Browning Silver Auto, Maxus, Gold; Franchi I-12; Glock; Marlin 336, 444, 1895. Remington 870, 1100, 1187; Sig Sauer P226; Smith & Wesson M&P; Springfield XD; Stoeger 2000, P-350, 3500. Winchester SX3, M94. CZ is a registered trademark of CZ-USA. Franchi is a registered trademark of Franchi S.P.A. Kimber is a registered trademark of Kimber Mfg.,

CUSTOMER SERVICE

REPAIRS

For product support of warranty service go to https://burris.supportsync.com

BALLISTICS SERVICES

Get custom scope work, knob conversions and reticle upgrades. Call 888-440-0244 for a quote and estimated turnaround time, and to order. **ballistics.burrisoptics.com**

PRODUCT MANUALS

Download Burris Optics product manuals at burrisoptics.com/customer-service/ manuals.

FAQS

Find answers to common Burris Optics questions at burrisoptics.com/customer-service/faqs.

REBATES, PROMOTIONS AND NEW PRODUCTS

Sign up to receive emails about rebates, promotions and brand new products. Go to **burrisoptics.com/email-subscription**.

Inc. 10/22, 77/22, 77/17, 77/44, 77/ML, Blackhawk, Mark I, Mark II, Mark III, Mini-14, M77, Redhawk, Ruger, Ruger No. 1, Super Blackhawk Hunter, and Super Redhawk are registered trademarks of Sturm, Ruger & Co., Inc. Marlin is a registered trademark of Remington Arms Company, LLC. Smith & Wesson is a registered trademark of Smith & Wesson Corp. Taurus is a registered trademark of Forjas Tauras S.A.

Tikka is a registered trademark of Sako Ltd., Corp. Torx is a registered trademark of Textron Inc. Leupold is a registered trademark of Leupold & Stevens, Inc. Predator Quest is a registered trademark of Predator Quest, LLC. Realtree Max-1[®] is a registered trademark of Jordan Outdoor Enterprises, Ltd.

Horus[®] H591[™] is a registered trademark of Horus Vision, LLC produced upon license from Horus Vision, LLC and may be covered by pending or issued patents or may have certain limitations. Please visit Horus Vision, LLC's website for more information: www.horusvision.com.

Burris products are protected by one U.S. Patents: burrisoptics.com/patents.

All prices and specifications are subject to change without notice.

© Copyright 2019 Burris Company

2019

HUNT &

TACTICAL

OPTICS



C

BURRIS COMPANY, INC.

331 E. 8TH STREET. GREELEY, CO 80631 P: 888-440-0244 F: 970-356-8702 BURRISOPTICS.COM

© 2019 BURRIS COMPANY ITEM NO. 900008