



APEX XQ38 / LRF XQ38

Thermal Sights





Reticle Catalogue

Notice

The values of the reticles indicated in this catalogue are correct in the following cases:



- when the magnification of the scope is set to minimum
- when "picture in picture" is activated

D50i

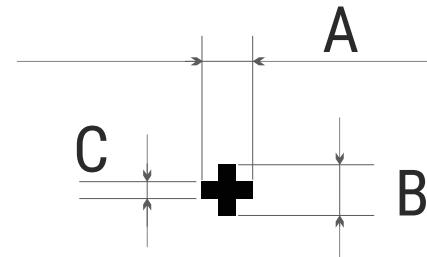



| Reticle parameters | MOA / cm @ 100 m |
|--------------------|------------------|
| Section A | 2.8 / 8 |
| Section B | 2.8 / 8 |
| Section C | 0.9 / 2.7 |

H50i

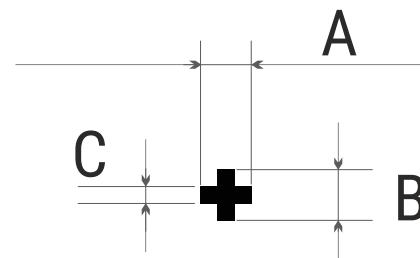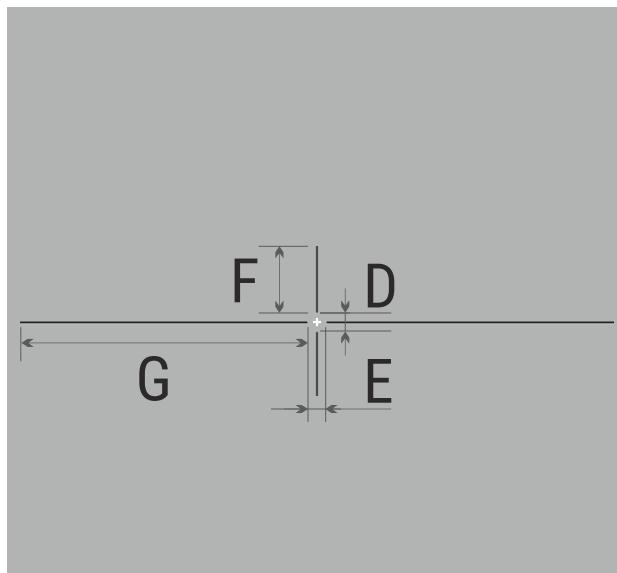



| Reticle parameters | MOA / cm @ 100 m |
|--------------------|------------------|
| Section A | 2.8 / 8 |
| Section B | 2.8 / 8 |
| Section C | 0.9 / 2.7 |
| Section D | 6.4 / 18.8 |
| Section E | 6.4 / 18.8 |
| Section F | 23.9 / 69.7 |
| Section G | 103.1 / 300 |

M50i

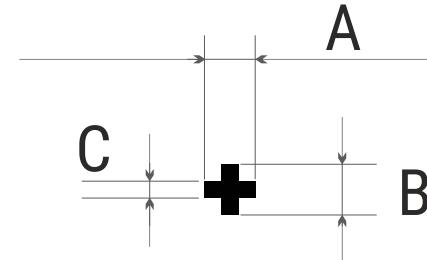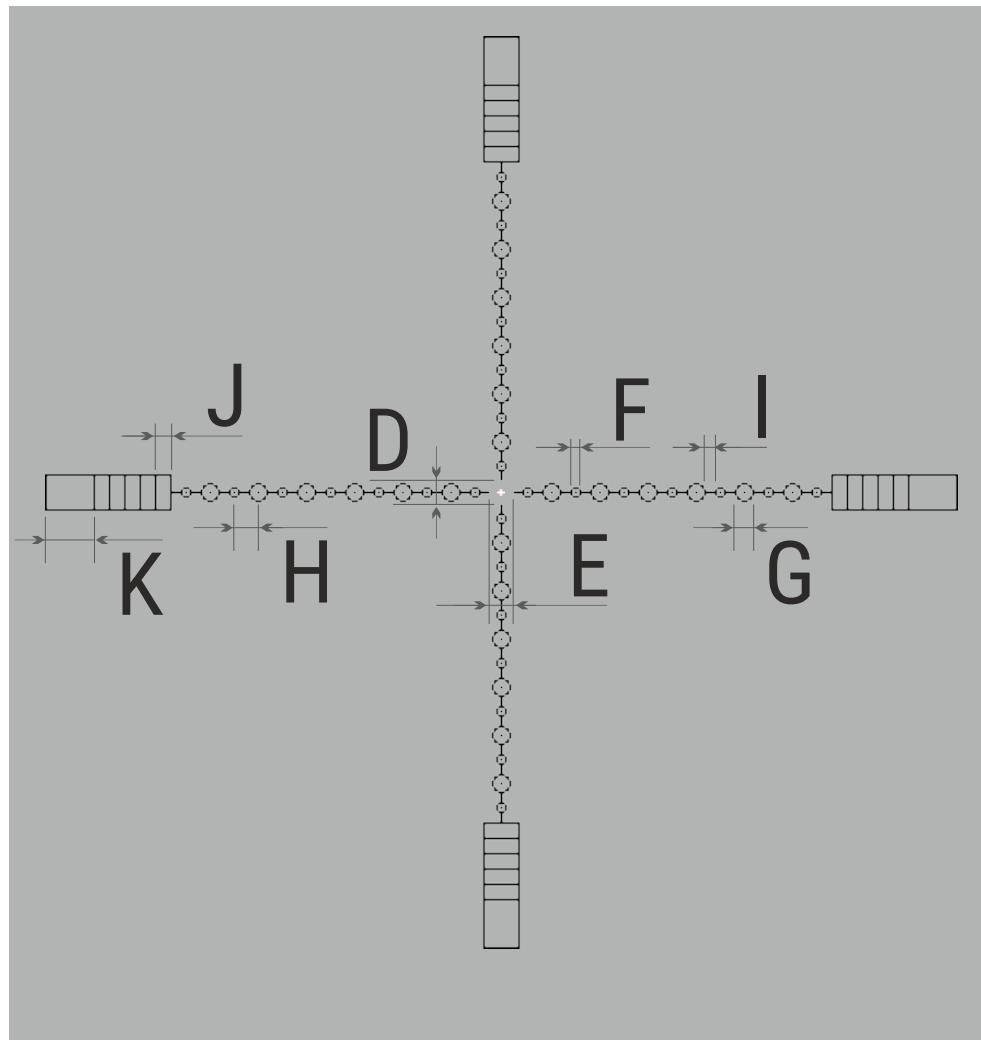



| Reticle parameters | MOA / cm @ 100 m |
|--------------------|------------------|
| Section A | 2.8 / 8 |
| Section B | 2.8 / 8 |
| Section C | 0.9 / 2.7 |
| Section D | 10.1 / 29.5 |
| Section E | 10.1 / 29.5 |
| Section F | 4.6 / 13.4 |
| Section G | 8.3 / 24.1 |
| Section H | 10.1 / 29.5 |
| Section I | 4.6 / 13.4 |
| Section J | 6.4 / 18.8 |
| Section K | 20.3 / 58.9 |

M51i

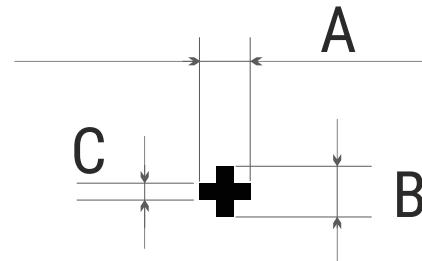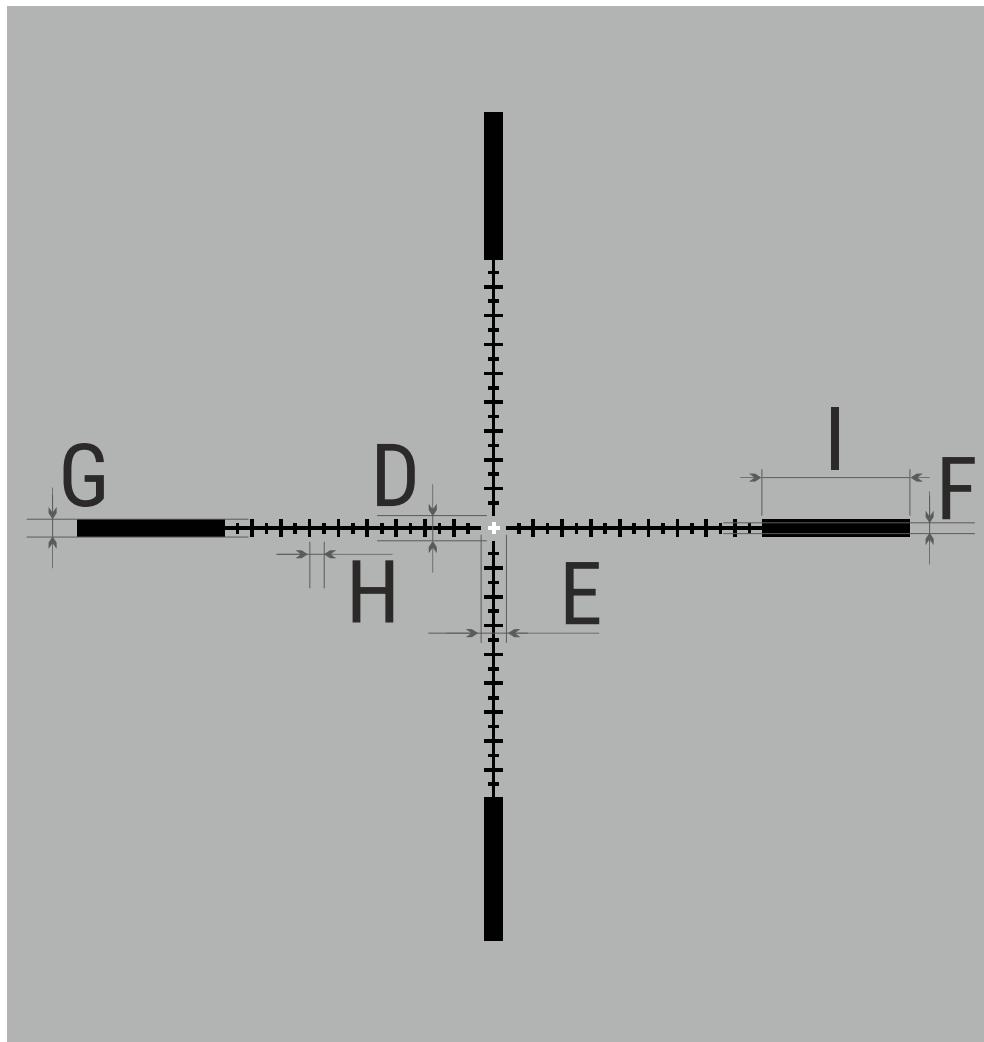



| Reticle parameters | MOA / cm @ 100 m |
|--------------------|------------------|
| Section A | 2.8 / 8 |
| Section B | 2.8 / 8 |
| Section C | 0.9 / 2.7 |
| Section D | 6.4 / 18.8 |
| Section E | 6.4 / 18.8 |
| Section F | 2.8 / 8 |
| Section G | 4.6 / 13.4 |
| Section H | 3.7 / 10.7 |
| Section I | 37.7 / 109.8 |

M54i

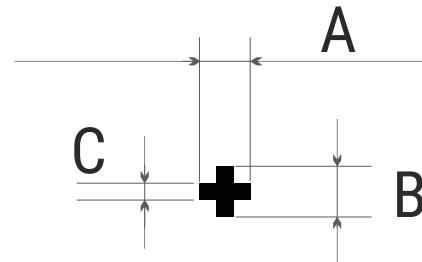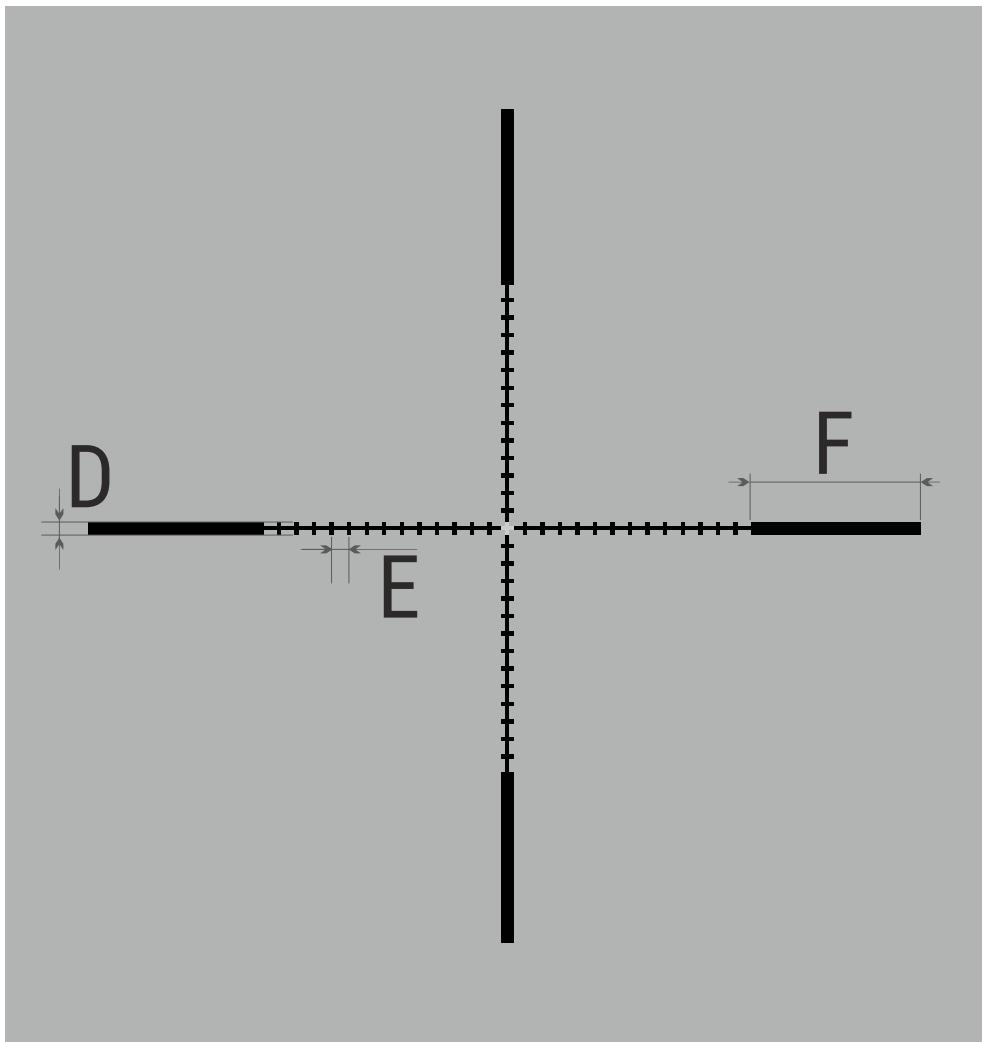



| Reticle parameters | MOA / cm @ 100 m |
|--------------------|------------------|
| Section A | 2.8 / 8 |
| Section B | 2.8 / 8 |
| Section C | 0.9 / 2.7 |
| Section D | 2.8 / 8 |
| Section E | 3.7 / 10.7 |
| Section F | 36.8 / 107.2 |

T50i

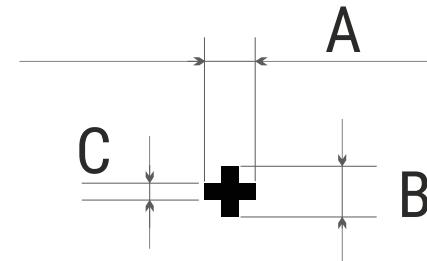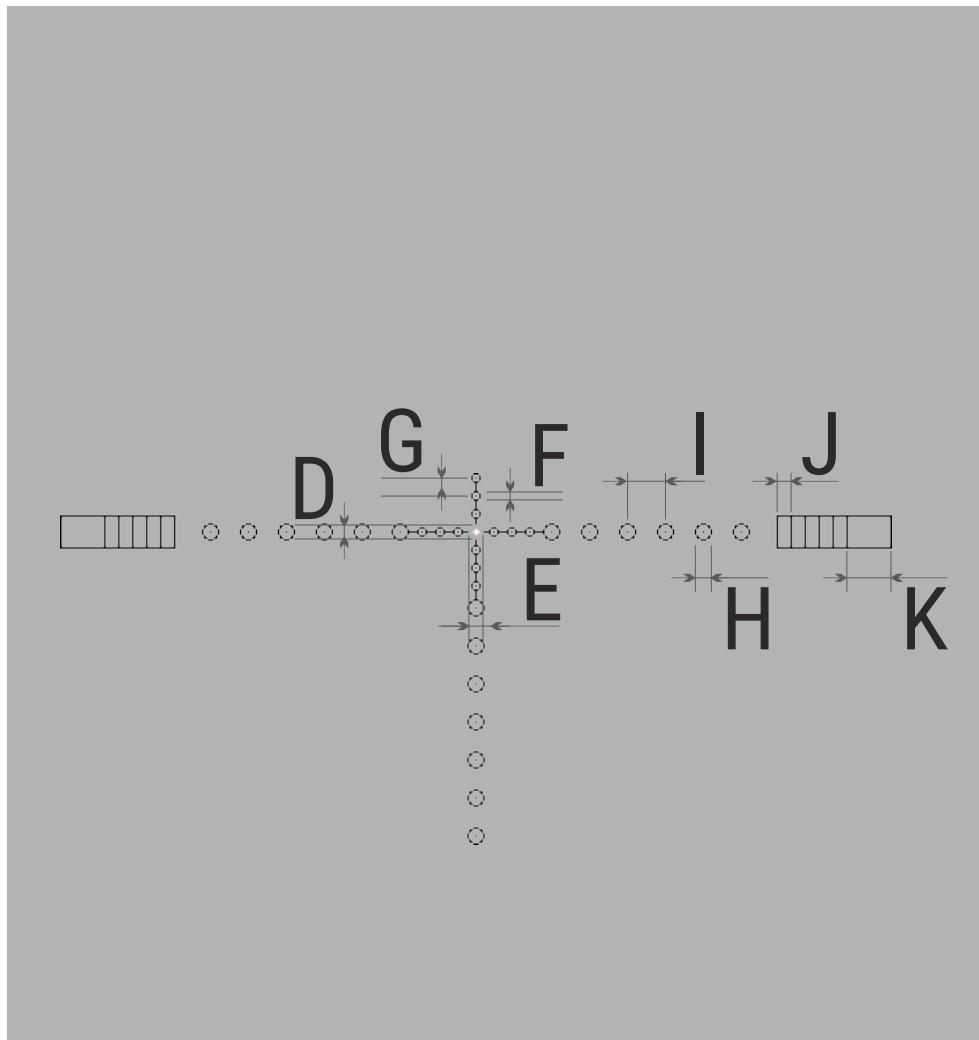



| Reticle parameters | MOA / cm @ 100 m |
|--------------------|------------------|
| Section A | 2.8 / 8 |
| Section B | 2.8 / 8 |
| Section C | 0.9 / 2.7 |
| Section D | 6.4 / 18.8 |
| Section E | 6.4 / 18.8 |
| Section F | 4.6 / 13.4 |
| Section G | 8.3 / 24.1 |
| Section H | 8.3 / 24.1 |
| Section I | 17.5 / 50.9 |
| Section J | 6.4 / 18.8 |
| Section K | 20.3 / 58.9 |

T51AI

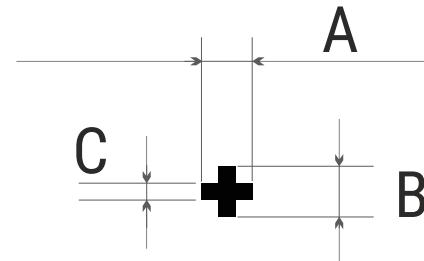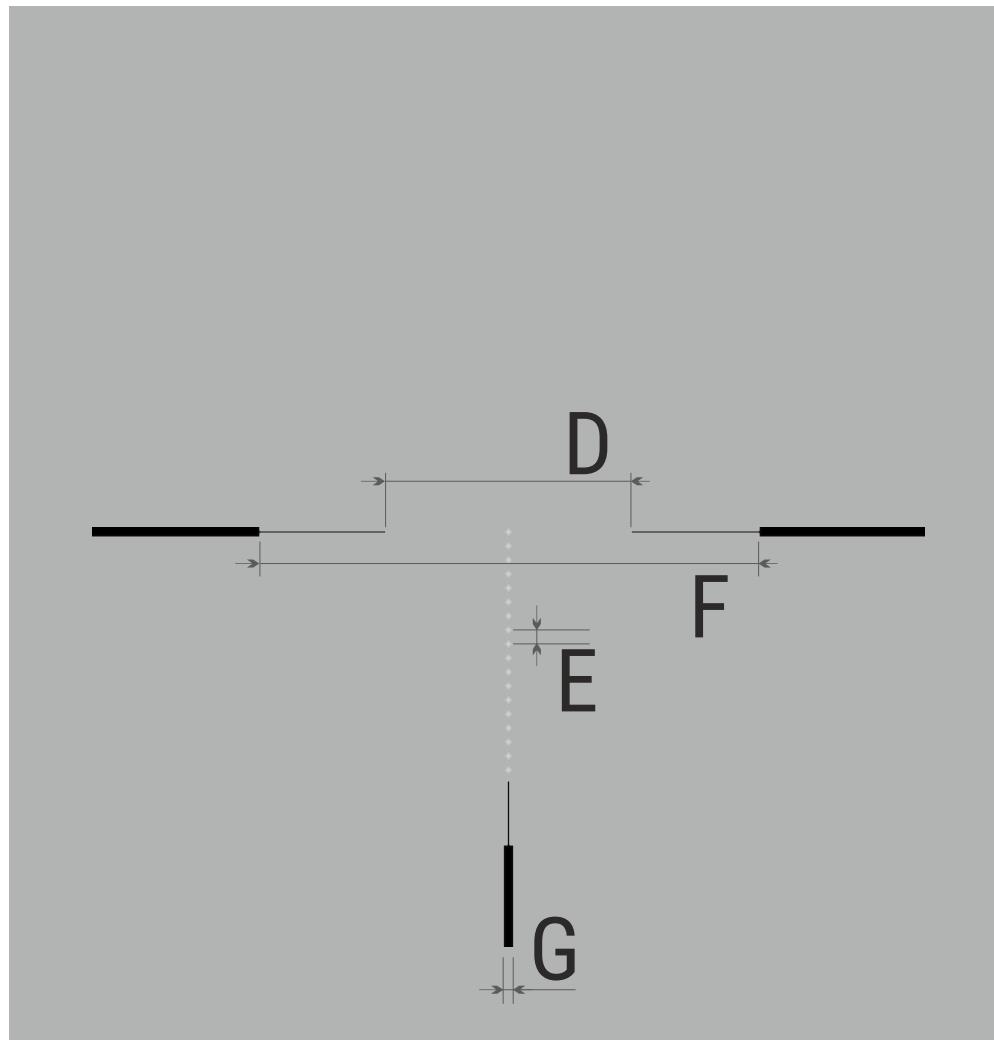



| Reticle parameters | MOA / cm @ 100 m |
|--------------------|------------------|
| Section A | 2.8 / 8 |
| Section B | 2.8 / 8 |
| Section C | 0.9 / 2.7 |
| Section D | 114.2 / 332.2 |
| Section E | 6.4 / 18.8 |
| Section F | 230.1 / 669.7 |
| Section G | 4.6 / 13.4 |

T52i

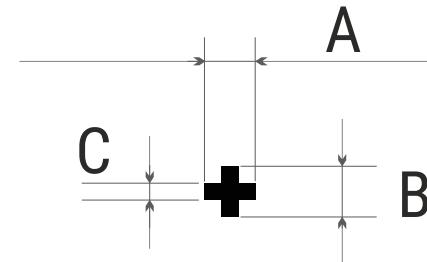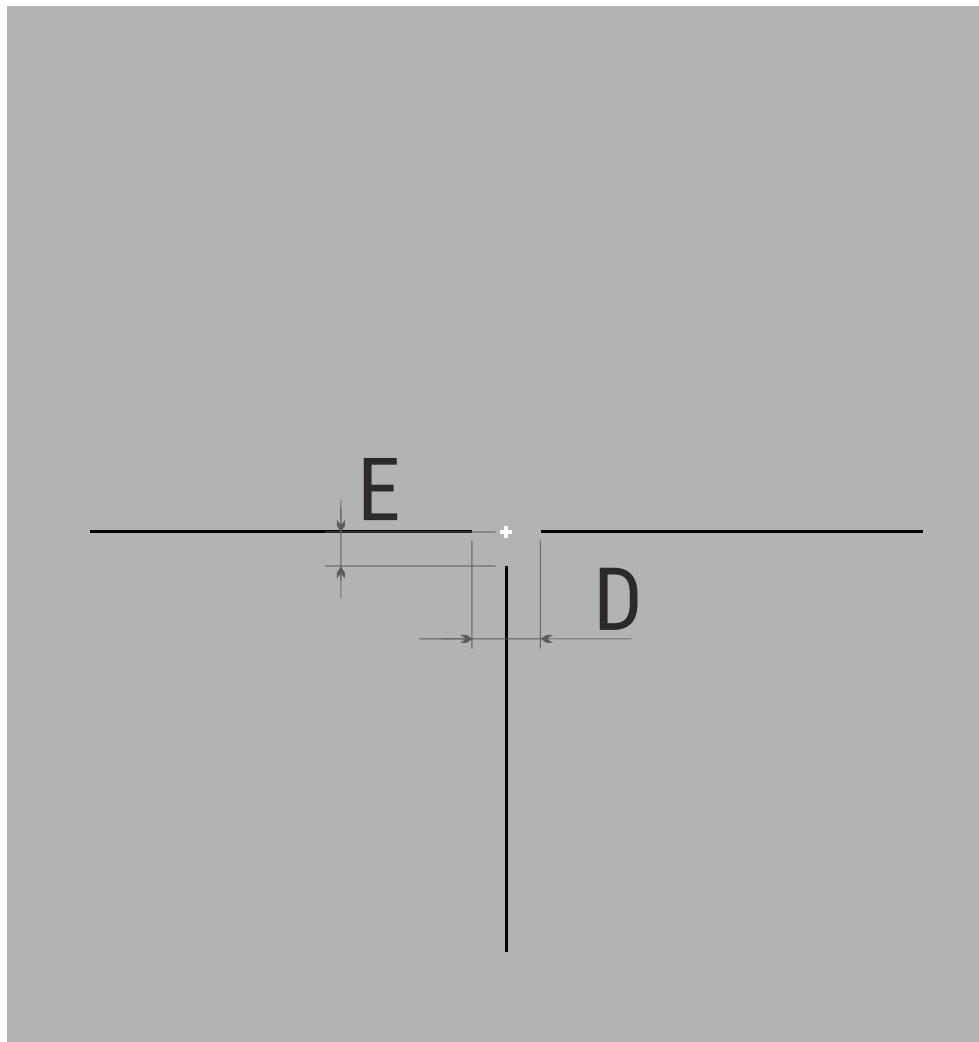



| Reticle parameters | MOA / cm @ 100 m |
|--------------------|------------------|
| Section A | 2.8 / 8 |
| Section B | 2.8 / 8 |
| Section C | 0.9 / 2.7 |
| Section D | 18.4 / 53.6 |
| Section E | 9.2 / 26.8 |

X50i

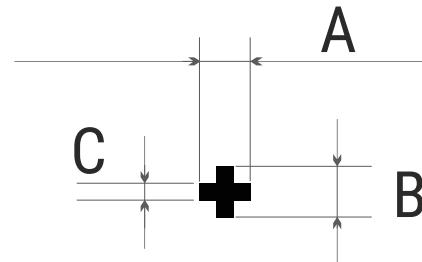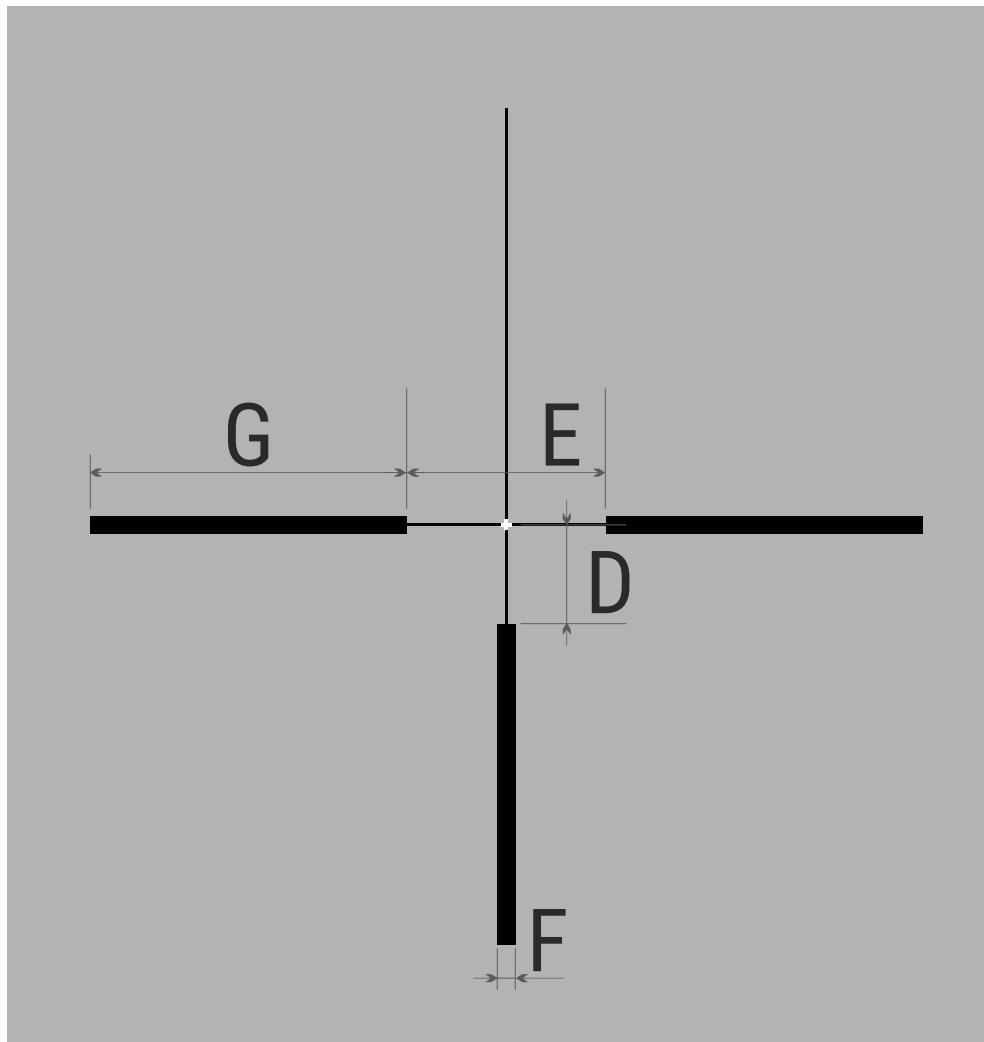



| Reticle parameters | MOA / cm @ 100 m |
|--------------------|------------------|
| Section A | 2.8 / 8 |
| Section B | 2.8 / 8 |
| Section C | 0.9 / 2.7 |
| Section D | 25.8 / 75 |
| Section E | 51.6 / 150 |
| Section F | 4.6 / 13.4 |
| Section G | 81 / 235.7 |

X51i (X51i-150)

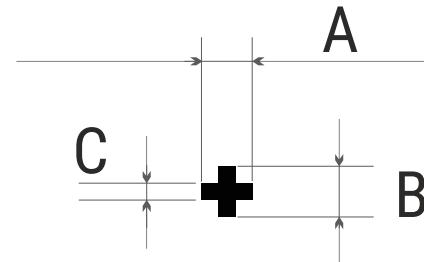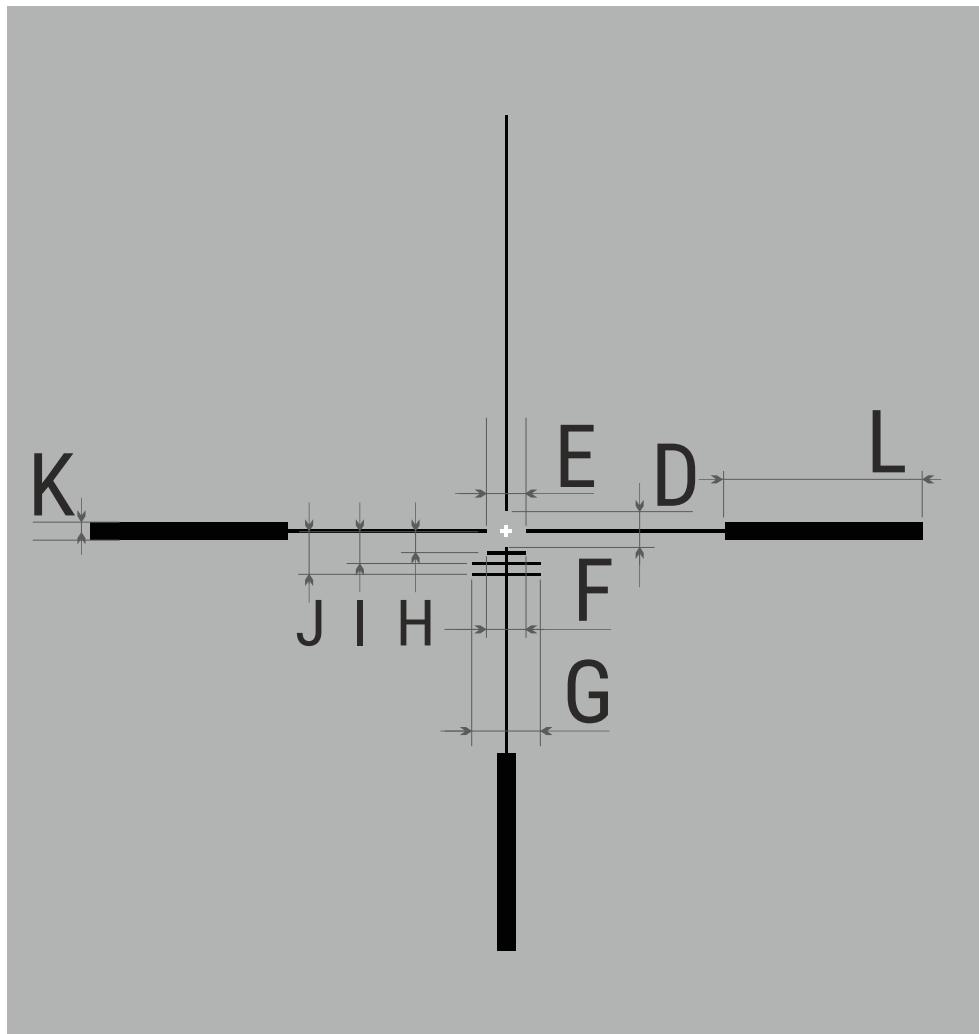



| Reticle parameters | MOA / cm @ 100 m |
|--------------------|------------------|
| Section A | 2.8 / 8 |
| Section B | 2.8 / 8 |
| Section C | 0.9 / 2.7 |
| Section D | 10.1 / 29.5 |
| Section E | 9.2 / 26.8 |
| Section F | 10.1 / 29.5 |
| Section G | 17.5 / 50.9 |
| Section H | 5.5 / 16.1 |
| Section I | 8.3 / 24.1 |
| Section J | 11 / 32.1 |
| Section K | 4.6 / 13.4 |
| Section L | 50.6 / 147.3 |

X52i

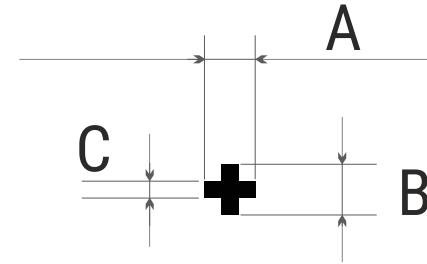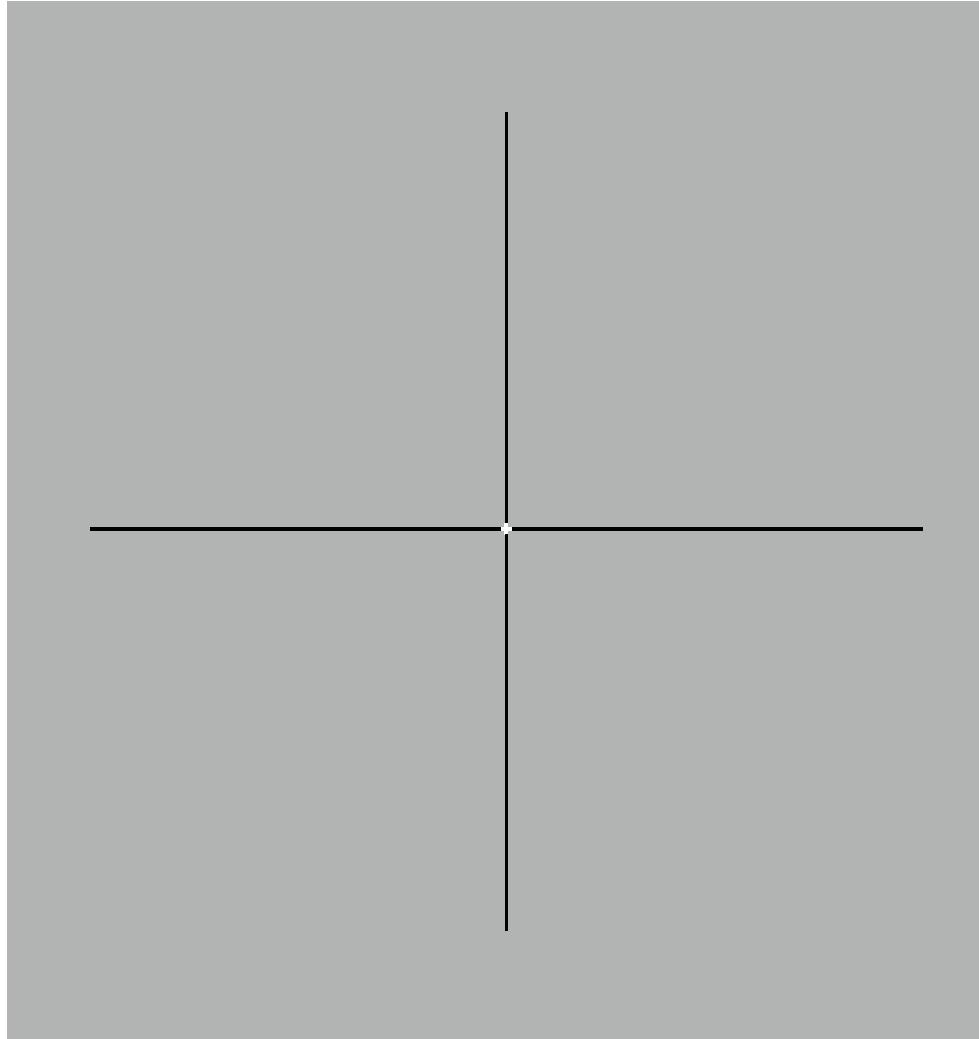



| Reticle parameters | MOA / cm @ 100 m |
|--------------------|------------------|
| Section A | 2.8 / 8 |
| Section B | 2.8 / 8 |
| Section C | 0.9 / 2.7 |

X53i

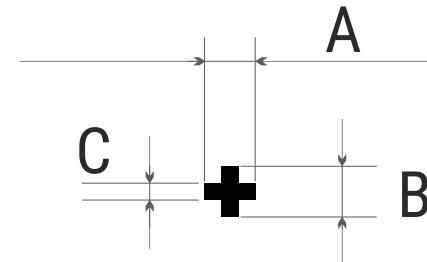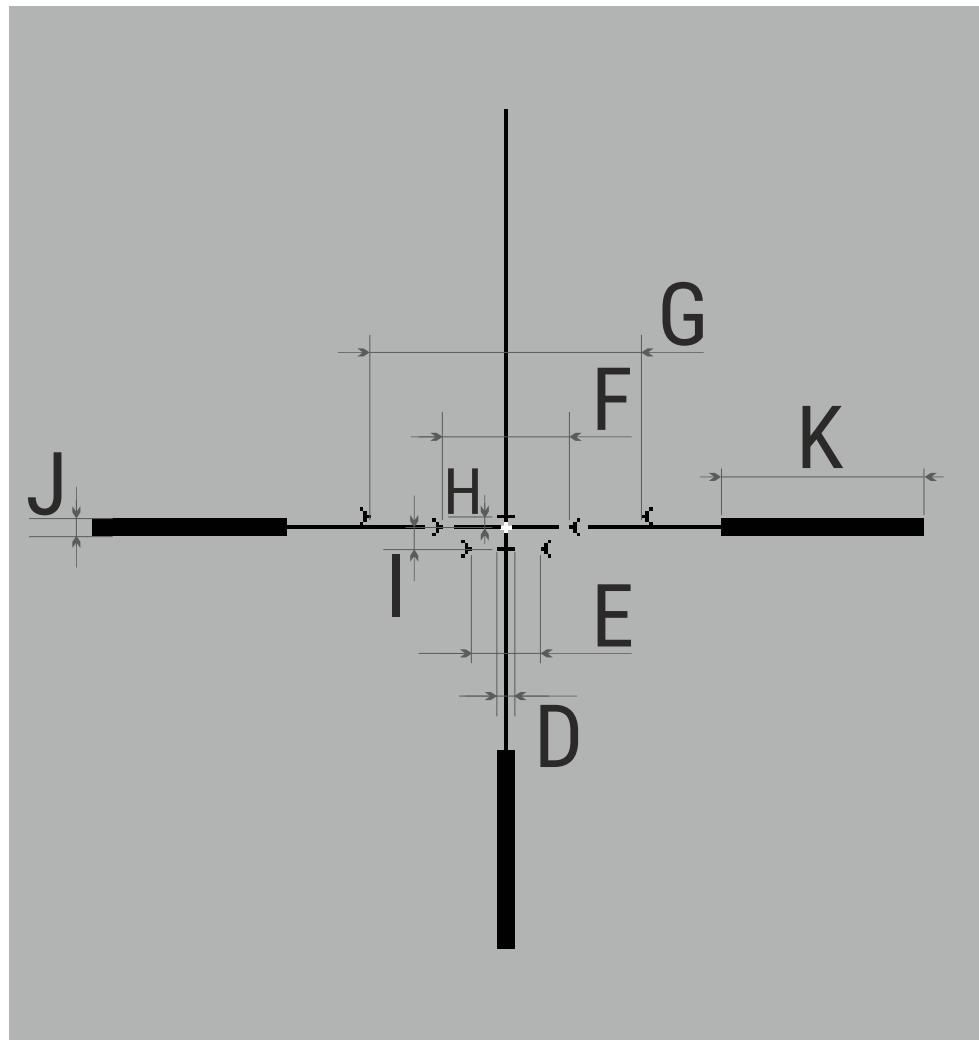

| Reticle parameters | MOA / cm @ 100 m |
|--------------------|------------------|
| Section A | 2.8 / 8 |
| Section B | 2.8 / 8 |
| Section C | 0.9 / 2.7 |
| Section D | 4.6 / 13.4 |
| Section E | 18.4 / 53.6 |
| Section F | 33.1 / 96.4 |
| Section G | 70 / 203.6 |
| Section H | 2.8 / 8.0 |
| Section I | 5.5 / 16.1 |
| Section J | 4.6 / 13.4 |
| Section K | 49.7 / 144.7 |

X54i

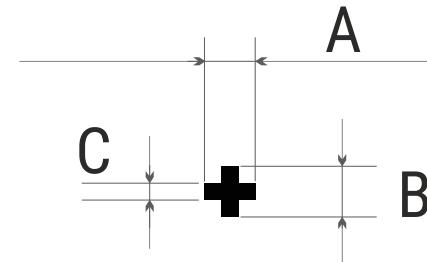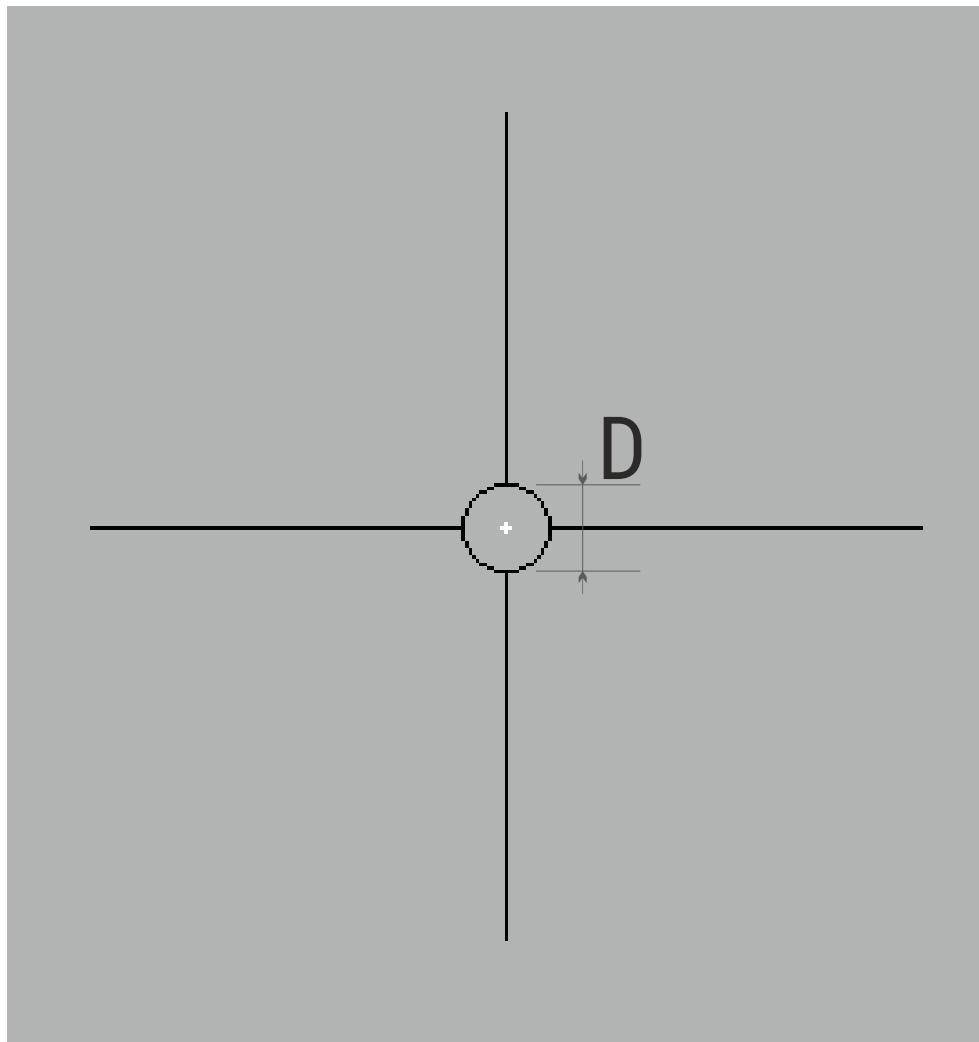

| Reticle parameters | MOA / cm @ 100 m |
|--------------------|------------------|
| Section A | 2.8 / 8 |
| Section B | 2.8 / 8 |
| Section C | 0.9 / 2.7 |
| Section D | 23 / 67 |