



# TRAIL XP50 / XQ 30

Thermal Sights





## Reticle Catalogue

### Notice

The values of the reticles indicated in this catalogue are correct in the following cases:



- when the magnification of the scope is set to minimum
- when "picture in picture" is activated

# D50i

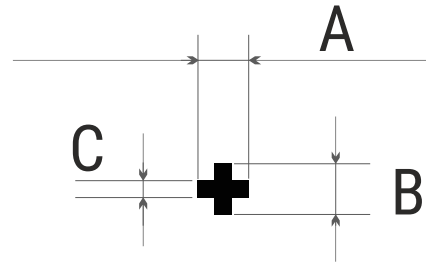



Reticle parameters	MOA / cm @ 100 m
Section A	3.5 / 10.2
Section B	3.5 / 10.2
Section C	1.2 / 3.4

# H50i

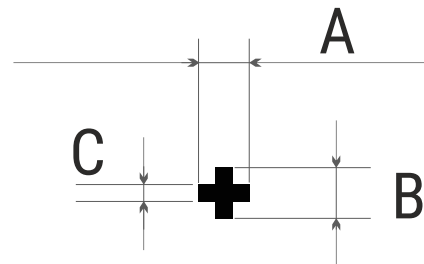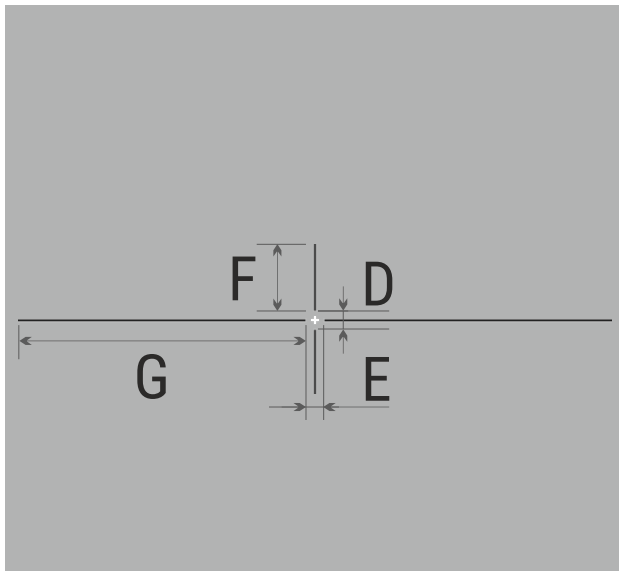



Reticle parameters	MOA / cm @ 100 m
Section A	3.5 / 10.2
Section B	3.5 / 10.2
Section C	1.2 / 3.4
Section D	8.2 / 23.8
Section E	8.2 / 23.8
Section F	30.4 / 88.4
Section G	130.9 / 380.8

# M50i

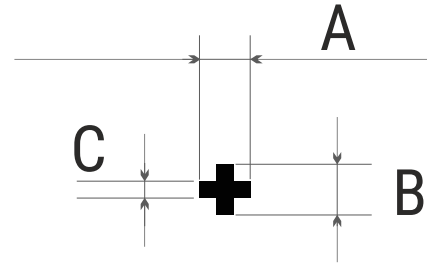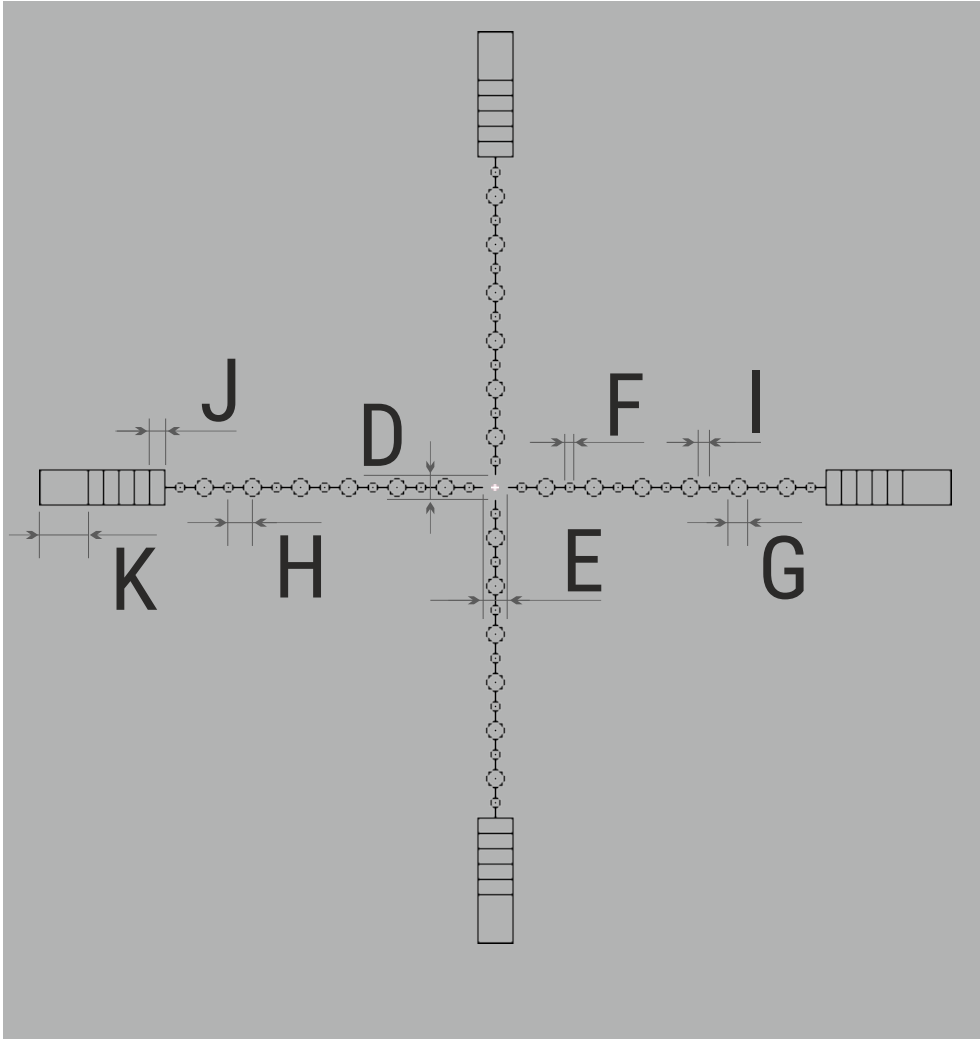



Reticle parameters	MOA / cm @ 100 m
Section A	3.5 / 10.2
Section B	3.5 / 10.2
Section C	1.2 / 3.4
Section D	12.9 / 37.4
Section E	12.9 / 37.4
Section F	5.8 / 17
Section G	10.5 / 30.6
Section H	12.9 / 37.4
Section I	5.8 / 17.0
Section J	7 / 20.4
Section K	24.5 / 71.4

# M51i

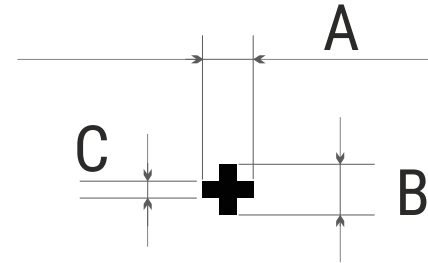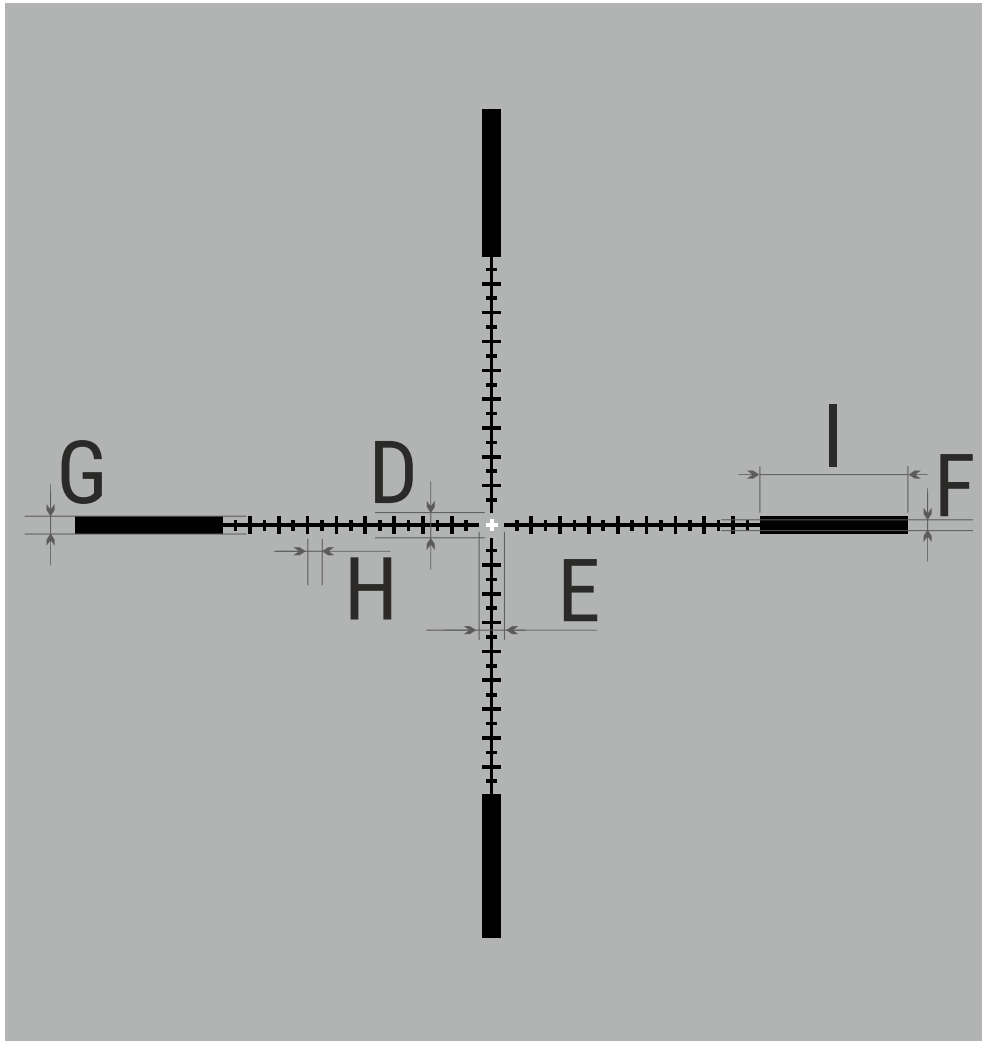



Reticle parameters	MOA / cm @ 100 m
Section A	3.5 / 10.2
Section B	3.5 / 10.2
Section C	1.2 / 3.4
Section D	8.2 / 23.8
Section E	8.2 / 23.8
Section F	3.5 / 10.2
Section G	5.8 / 17
Section H	4.7 / 13.6
Section I	47.9 / 139.4

# M54i

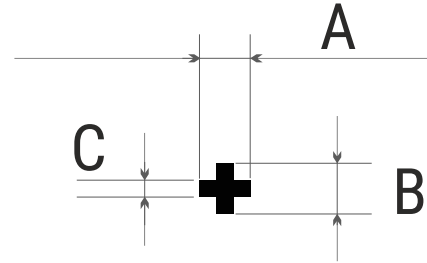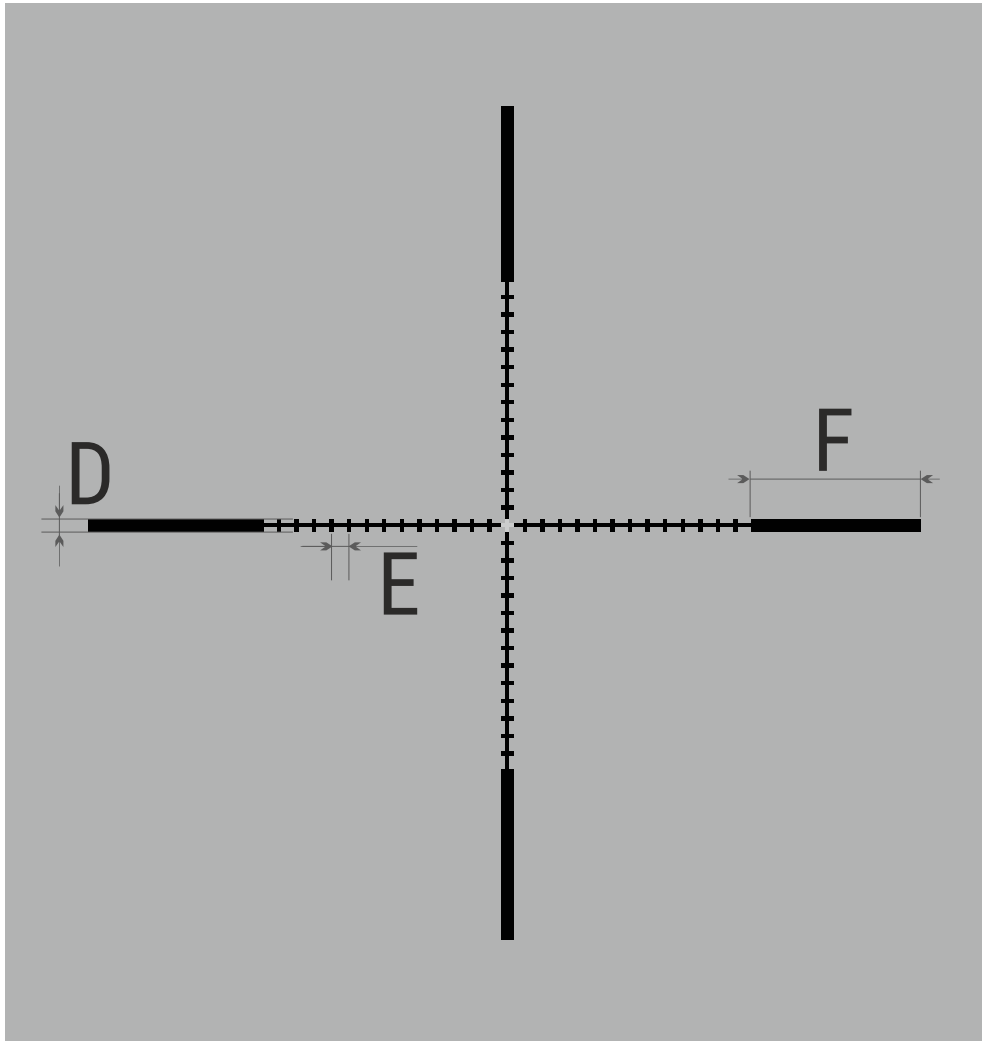



Reticle parameters	MOA / cm @ 100 m
Section A	3.5 / 10.2
Section B	3.5 / 10.2
Section C	1.2 / 3.4
Section D	3.5 / 10.2
Section E	4.7 / 13.6
Section F	46.7 / 136

# T50i

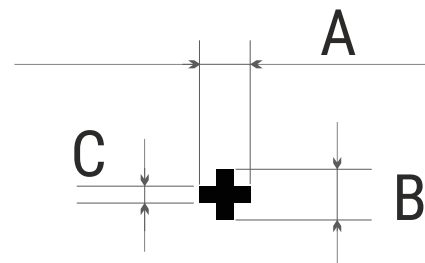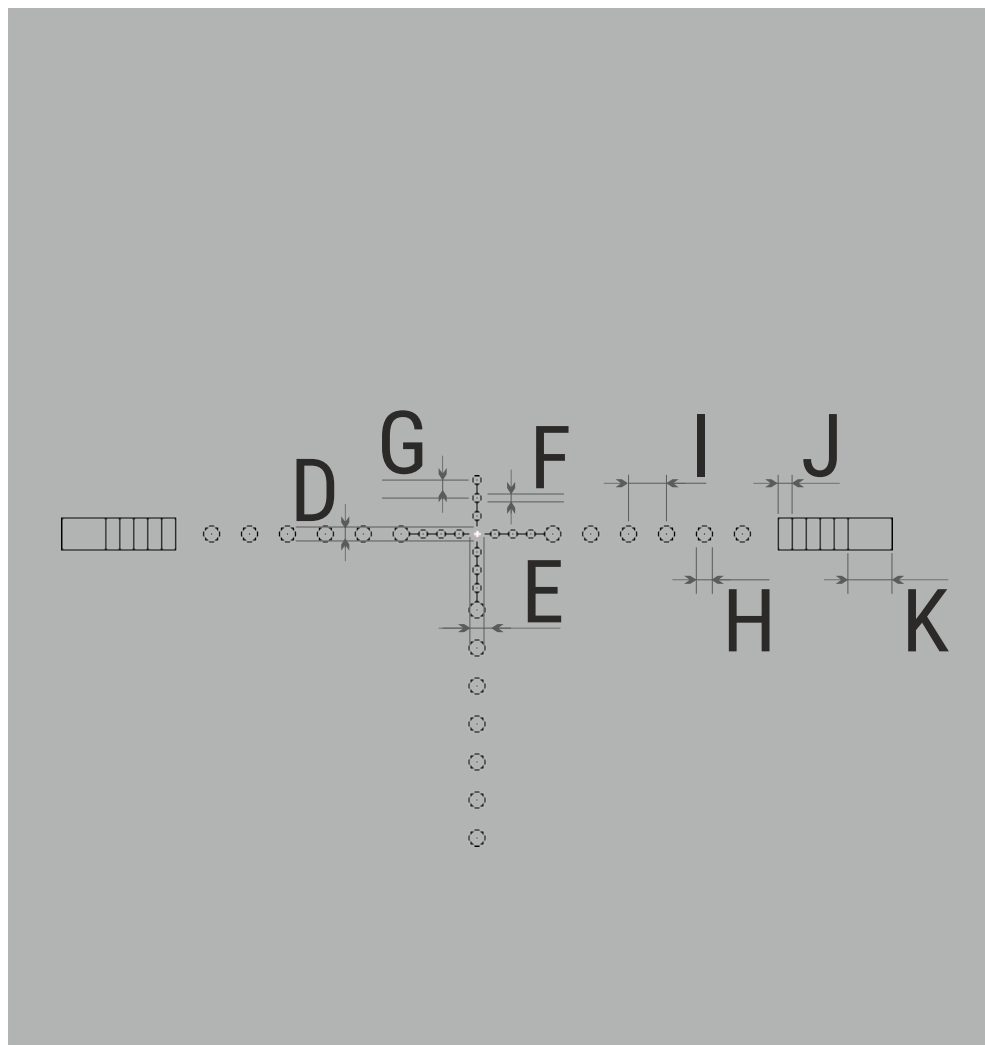



Reticle parameters	MOA / cm @ 100 m
Section A	3.5 / 10.2
Section B	3.5 / 10.2
Section C	1.2 / 3.4
Section D	8.2 / 23.8
Section E	8.2 / 23.8
Section F	5.8 / 17
Section G	10.5 / 30.6
Section H	10.5 / 30.6
Section I	22.2 / 64.6
Section J	7 / 20.4
Section K	24.5 / 71.4

# T51AI

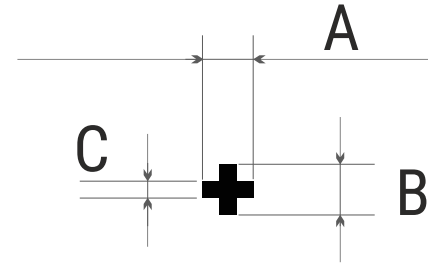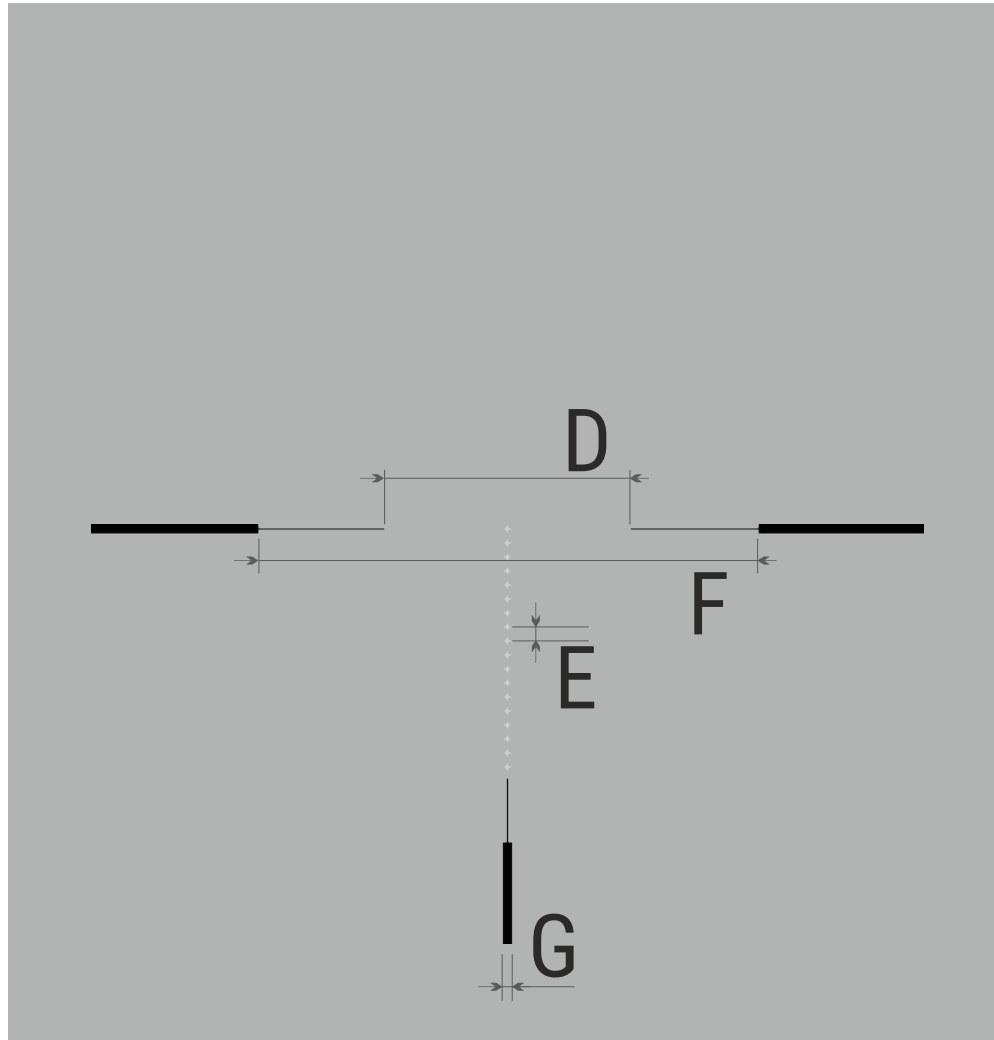

Reticle parameters	MOA / cm @ 100 m
Section A	3.5 / 10.2
Section B	3.5 / 10.2
Section C	1.2 / 3.4
Section D	143.7 / 418.2
Section E	292.1 / 850
Section F	8.2 / 23.8
Section G	5.8 / 17



# T52i

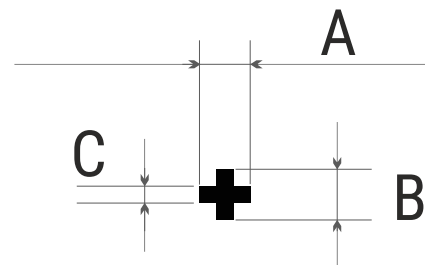

Reticle parameters	MOA / cm @ 100 m
Section A	3.5 / 10.2
Section B	3.5 / 10.2
Section C	1.2 / 3.4
Section D	22.2 / 64.6
Section E	11.7 / 34





# X50i

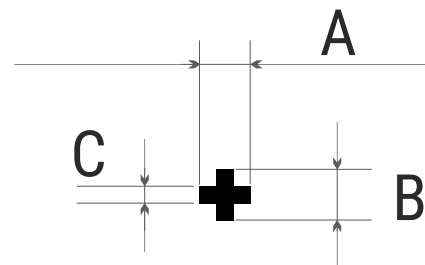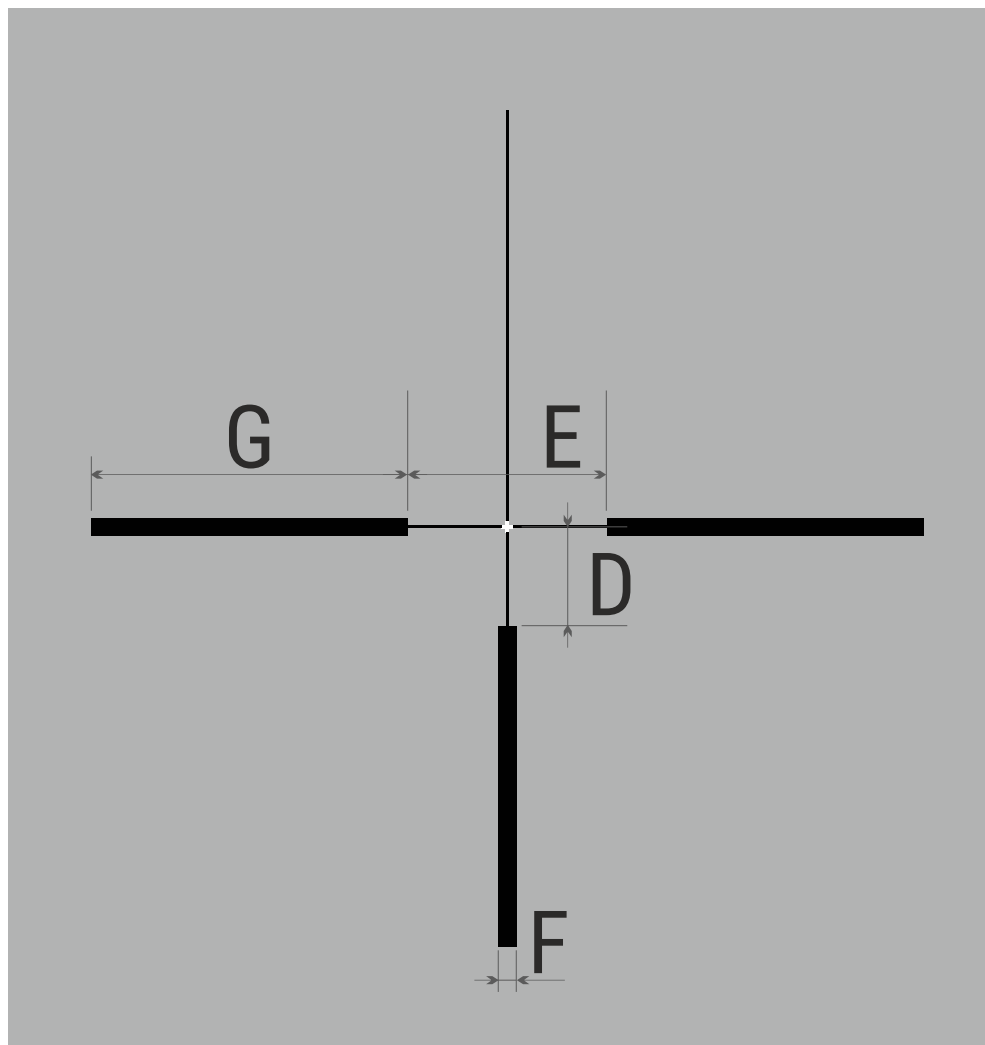



Reticle parameters	MOA / cm @ 100 m
Section A	3.5 / 10.2
Section B	3.5 / 10.2
Section C	1.2 / 3.4
Section D	32.7 / 95.2
Section E	64.3 / 187
Section F	5.8 / 17
Section G	102.8 / 299.2

# X51i (X51i-150)

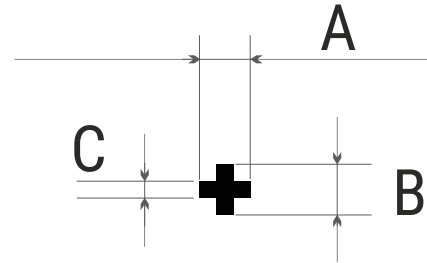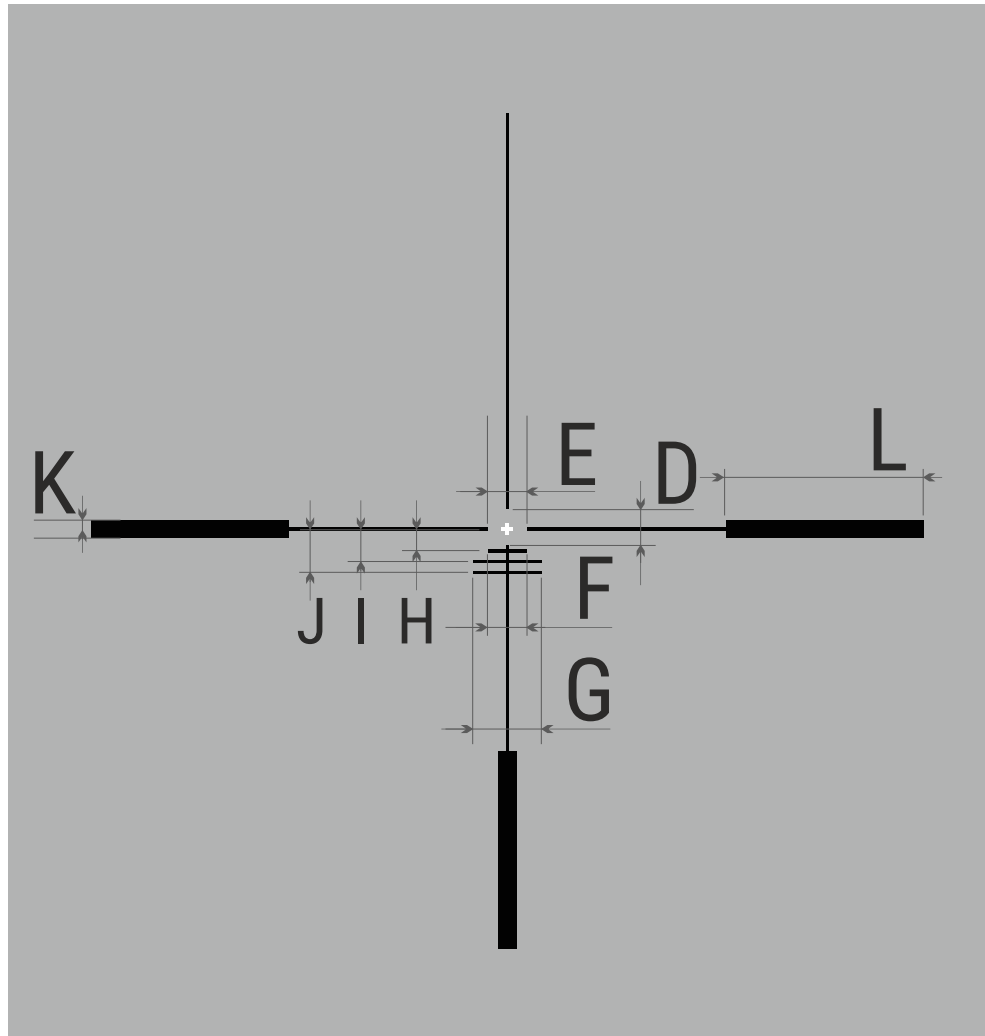



Reticle parameters	MOA / cm @ 100 m
Section A	3.5 / 10.2
Section B	3.5 / 10.2
Section C	1.2 / 3.4
Section D	10.5 / 30.6
Section E	12.9 / 37.4
Section F	12.9 / 37.4
Section G	22.2 / 64.6
Section H	5.8 / 17
Section I	9.3 / 27.2
Section J	12.9 / 37.4
Section K	5.8 / 17
Section L	64.3 / 187

# X52i

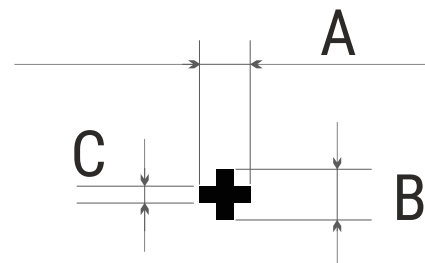



Reticle parameters	MOA / cm @ 100 m
Section A	3.5 / 10.2
Section B	3.5 / 10.2
Section C	1.2 / 3.4

# X53i

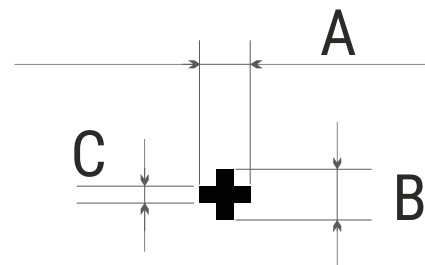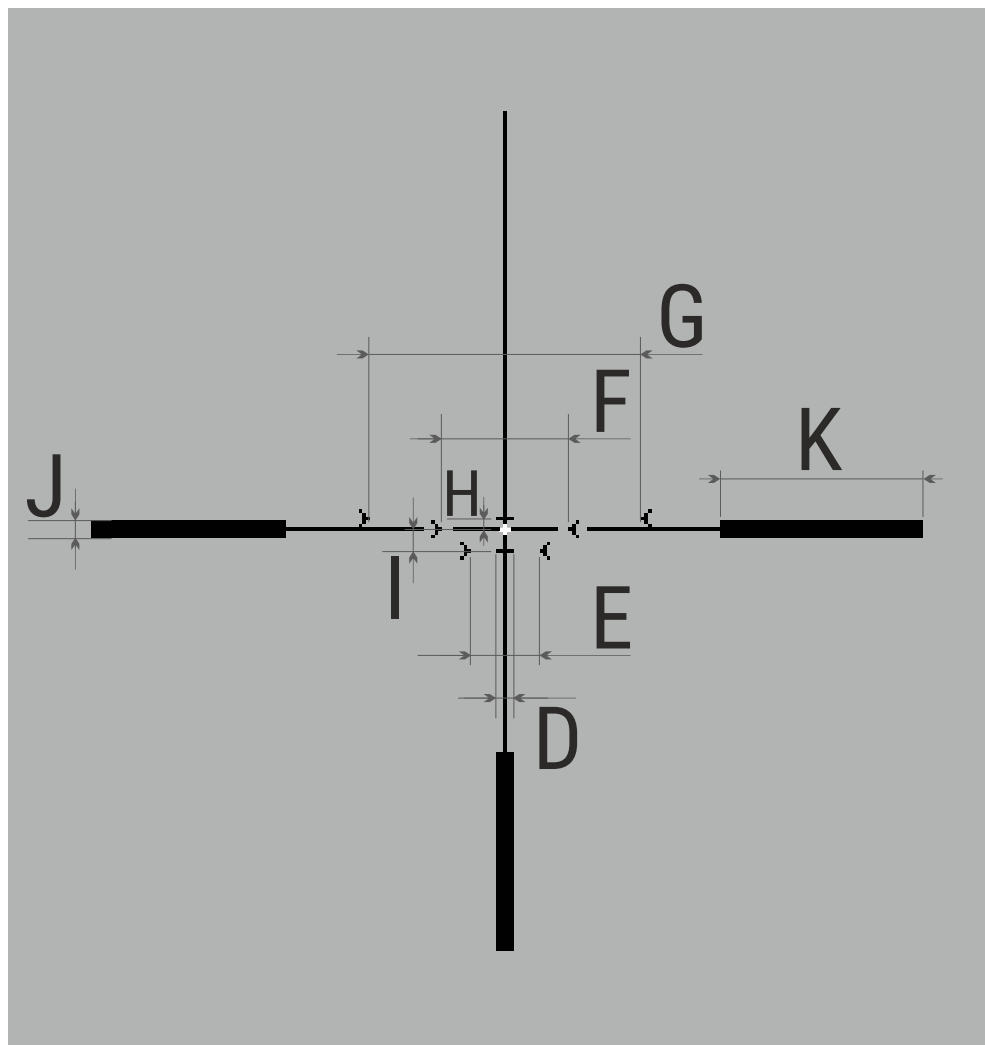

Reticle parameters	MOA / cm @ 100 m
Section A	3.5 / 10.2
Section B	3.5 / 10.2
Section C	1.2 / 3.4
Section D	5.8 / 17
Section E	17.5 / 51
Section F	33.9 / 98.6
Section G	68.9 / 200.6
Section H	3.5 / 10.2
Section I	7 / 20.4
Section J	5.8 / 17
Section K	65.4 / 190.4

# X54i

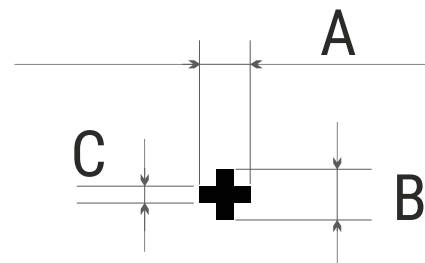

Reticle parameters	MOA / cm @ 100 m
Section A	3.5 / 10.2
Section B	3.5 / 10.2
Section C	1.2 / 3.4
Section D	29.2 / 85