

AS RUGGED—AND AS ACCURATE—AS IT GETS

Add speed and precision to your self-defense, duty weapon, competition, or target pistol with an RMR[®] — an upgrade to your stock iron sights. The Trijicon RMR[®] is designed to be as durable as the legendary Trijicon ACOG[®], while also improving precision and accuracy with any style or caliber of firearm.

The RMR is designed with a patented housing shape that absorbs impacts and diverts stresses away from the lens to increase durability. The RMR Type 2 LED and Adjustable LED models offer redesigned and upgraded electronics that are proven to perform when mounted on slide ride pistols and other small arms. The RMR Dual-Illuminated models offer a battery-free alternative that is just as rugged and reliable.

MODELS



RMR[®] Type 2 LED



RMR[®] Type 2 Adjustable LED



RMR[®] Dual-Illuminated

Trijicon **RMR**®

FEATURES

UNIQUE PATENTED HOUSING SHAPE Forged 7075-T6 aircraft-aluminum-alloy housing shape diverts the force of an impact away from the lens, greatly increasing the durability of the sight.

TRUE-COLOR, MULTI-COATED LENS Creates a wide-band light transmission for minimal change in target area color.

ADJUSTABLE WINDAGE/ELEVATION Easily adjustable without special tools. 1 MOA per click.

RMR[®] DUAL-ILLUMINATED

Tritium-phosphor lamp illuminates reticle in low-light conditions and fiber optics automatically adjust the brightness level and contrast to available light conditions.

RMR[®] TYPE 2 ADJUSTABLE LED

Easy-to-use buttons on the sides of the optic allow the user to adjust the illumination brightness, toggle between manual and automatic modes, and power down the RMR[®] for storage.

VERSATILE SIGHT Multiple primary applications including rifle, pistol, shotgun and carbine, or use as a secondary sight with a magnified optic.

PARALLAX FREE

WATERPROOF TO 20 METERS (66 ft.)

LIMITED LIFETIME WARRANTY

Tritium lamp is warranted to illuminate for 15 years from date of original manufacture (Dual-Illuminated RMR®). Electronics are warranted for 5 years from date of original manufacture (LED & Adjustable LED RMR®).

R4

R2

UPGRADED ELECTRONICS*

Ruggedized battery contacts and electronics ensure performance and survivability in harsh environments.

BATTERY CONSERVATION MODE^{*} Automatically adjusts aiming dot to ambient lighting conditions after 16.5 hours. The small size and rugged design make the Trijicon RMR® adaptable to many firearms platforms, including pistols. Photo to the right shows the RMR milled into a Glock 17 slide with Trijicon Bright & Tough[™] Suppressor Sights.



RXK933

SPECIFICATIONS

SYSTEM	RMR [°] Type 2 LED	RMR [°] Type 2 Adjustable LED	RMR [®] Dual-Illuminated
MAGNIFICATION	1x	1x	1x
SIGHT WINDOW	.87 x .63 in. 22 x 16mm	.87 x .63 in. 22 x 16mm	.87 x .63 in. 22 x 16mm
LENS	Tempered Glass	Tempered Glass	Tempered Glass
ADJUSTMENTS	1 Click = 1 MOA	1 Click = 1 MOA	1 Click = 1 MOA
ADJUSTMENT RANGE (ELEVATION & WINDAGE)	150 MOA Total Travel	150 MOA Total Travel	150 MOA Total Travel
DIMENSIONS (L X W X H)	1.8 x 1.1 x 1.0 in. 46 x 28 x 25mm	1.8 x 1.2 x 1.0 in. 46 x 30 x 25mm	1.8 x 1.2 x 1.0 in. 46 x 30 x 25mm
WEIGHT	1.2 oz. (w/ battery) 34g	1.17 oz. (w/ battery) 33.2g	1.2 oz. 34g
ILLUMINATION SOURCE	LED Powered by a CR2032 Lithium Battery	LED Powered by a CR2032 Lithium Battery	Tritium & Fiber Optics
BATTERY LIFE	2 Years of Typical Use*, 5 Years in Dark Storage	4+ Years of Continuous Use* at Setting 4 of 8	N/A
BRIGHTNESS SETTINGS	Automatic	Automatic and 8 Adjustable Settings	Automatic
AVAILABLE MOUNTING ADAPTERS	Picatinny Rail, Weaver Rail, ACOG [®] Add-On, Riflescope Add- On, Pistol, Double Barrel Rifle	Picatinny Rail, Weaver Rail, ACOG Add-On, Riflescope Add- On, Pistol, Double Barrel Rifle	Picatinny Rail, Weaver Rail, ACOG Add-On, Riflescope Add- On, Pistol, Double Barrel Rifle






38





RMR[®] Type 2 Adjustable LED



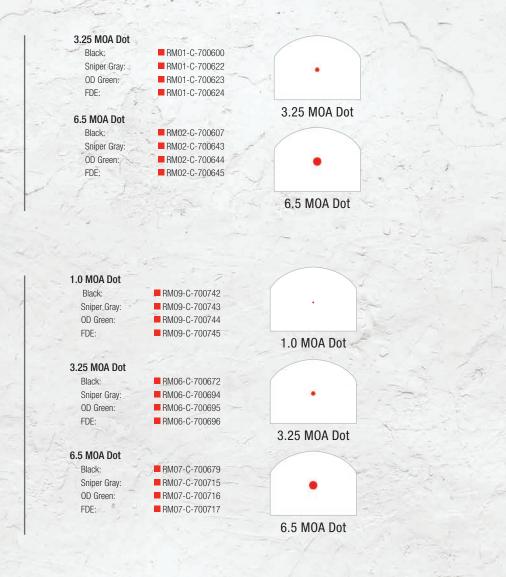

TAB ITAR controlled item. For export restrictions on all products, see page 153. Reticles not shown to scale. For a full view of reticles, please visit our website at trijicon.com.

RMR[®] Dual-Illuminated





