



Trijicon


Credo™ HX

PROVEN ACCURACY WHEN IT COUNTS. AND IT ALWAYS COUNTS.

The Trijicon Credo™ HX was designed with one purpose in mind: brag-worthy hunts. To help you do so with style, it offers rapid target acquisition from dawn to dusk, pinpoint accuracy, and tough-as-nails construction that can more than handle the hazards of a hunt.

Features and Benefits

- A Easy-Focus Eyepiece**
Diopter accommodates the shooter's individual prescription.
- B Re-Positionable Magnification Lever**
Accommodates different shooting positions and rifle configurations.
- C Purpose-Driven Design**
Sleek finish and low-profile controls prevent snagging.
- D Confident Aiming in Any Light**
User-selectable LED brightness settings with an "off" in between each setting to adapt to any environment.
- E Quick & Easy Adjustments**
Crisp, precise, windage/elevation adjusters require no tools and are designed to prevent accidental shift.
- F Ultra Durable for Ensured Reliability**
Ruggedized design engineered to withstand extreme conditions and tested to military standards and protocols.
- G Edge-to-Edge Clarity**
Fully multi-coated, broadband, anti-reflective glass provides excellent light transmission, true detail and color, with zero distortion.
- H "Both-Eyes-Open" Shooting**
Illuminated reticles provide a clear aiming point that draws the shooter's eye for fast engagement.
- I Quick Target Acquisition**
Proven reticle designs for the most discerning hunters, ensuring fast ranging and holdovers.
- J Fast Scanning, Detection and Tracking**
Extra-wide field of view for maximum situational awareness.

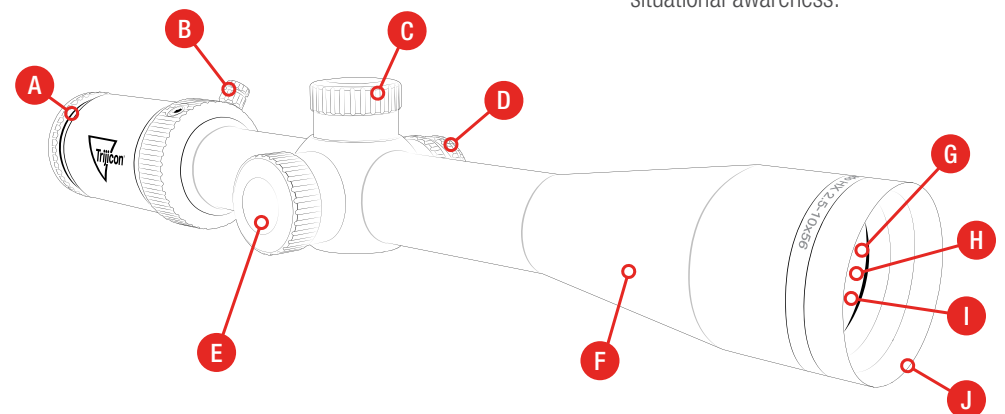




	1-4x24 (CRHX424 Series)	1-6x24 (CRHX624 Series)	1-8x28 (CRHX828 Series)
Eye Relief	2.6 – 3.9 in. 65 – 98mm	3.5 – 3.9 in. 88 – 100mm	3.0 – 4.0 in. 76 – 101mm
Exit Pupil	.69 – .2 in. 17.5 – 5.1mm	.47 – .16 in. 12 – 4.1mm	.46 – .14 in. 11.7 – 3.5mm
Field of View (@ 100 yd.) (@ 100m) (degrees)	95 – 24.2 ft. 31.7 – 8.1m 18.0° – 4.6°	113.4 – 18.8 ft. 37.8 – 6.3m 21.4° – 3.58°	105.8 – 13.2 ft. 35.3 – 4.4m 20° – 2.53°
Focal Plane	Second	First / Second	First
Adjuster Style	Capped	Capped	Exposed Locking
Adjustments	1/4 MOA Per Click	1/4 MOA Per Click	1/4 MOA Per Click
Adjustment Range Total Travel	100 MOA	100 MOA	100 MOA
Parallax Adjustment Range	N/A	N/A	N/A
Finish	Satin	Satin	Satin
Dimensions (L x W x H)	10.5 x 2.7 x 1.9 in.	10.9 x 2.8 x 2.0 in.	10.8 x 3.2 x 2.6 in.
Weight	17.2 oz.	18.2 – 18.9 oz.	25.7 oz.
Illumination Source	LED Powered by a CR2032 Lithium Battery	LED Powered by a CR2032 Lithium Battery	LED Powered by a CR2032 Lithium Battery
Tube Diameter	30mm	30mm	34mm



	2.5-10x56 (CRHX1056 Series)	2.5-15x42 (CRHX1542 Series)	2.5-15x56 (CRHX1556 Series)	4-16x50 (CRHX1650 Series)
Eye Relief	2.8 – 4.0 in. 72 – 102mm	3.4 – 3.9 in. 85 – 100mm	3.3 – 3.9 in. 85 – 98mm	3.1 – 3.8 in. 78 – 96mm
Exit Pupil	.64 – .21 in. 16.2 – 5.4mm	.42 – .11 in. 10.7 – 2.8mm	.46 – .15 in. 11.6 – 3.7mm	0.33 – 0.12 in. 8.5 – 3.1mm
Field of View (@ 100 yd.) (@ 100m) (degrees)	38.3 – 10.2 ft. 12.8 – 3.4m 7.3° – 1.94°	41.2 – 6.9 ft. 13.7 – 2.3m 7.86° – 1.31°	43.1 – 7.4 ft. 14.4 – 2.5m 8.22° – 1.42°	28.5 – 7.1 ft. 9.5 – 2.4m 5.43° – 1.36°
Focal Plane	Second	Second	Second	Second
Adjuster Style	Exposed / Capped	Exposed / Capped	Exposed / Capped	Exposed / Capped
Adjustments	1/4 MOA Per Click	1/4 MOA Per Click	1/4 MOA Per Click	1/4 MOA Per Click
Adjustment Range Total Travel	50 MOA	100 MOA Elevation 80 MOA Windage	60 MOA	70 MOA
Parallax Adjustment Range	N/A	10 yd. to Infinity	10 yd. to Infinity	10 yd. to Infinity
Finish	Satin	Satin	Satin	Satin
Dimensions (L x W x H)	13.8 x 2.7 – 2.9 x 2.6 – 2.8 in.	13.9 x 3.3 x 2.6 in.	14.7 x 3.3 x 2.9 in.	14.5 x 3.1 x 2.1 in.
Weight	25.4 oz.	22.9 oz.	27 oz.	24.7 oz.
Illumination Source	LED Powered by a CR2032 Lithium Battery	LED Powered by a CR2032 Lithium Battery	LED Powered by a CR2032 Lithium Battery	LED Powered by a CR2032 Lithium Battery
Tube Diameter	30mm	30mm	30mm	30mm

1-4x24



MOA Precision Hunter

Standard Duplex

MOA Precision Hunter, 30mm Tube, Low Capped Adjusters

Satin Black: ■ CRHX424-C-2900007 ■ CRHX424-C-2900008

Standard Duplex, 30mm Tube, Low Capped Adjusters

Satin Black: ■ CRHX424-C-2900009 ■ CRHX424-C-2900010

1-6x24 (SFP)



LED Dot BDC Hunter Holds .308

LED Dot BDC Hunter Holds .223

Second Focal Plane (SFP) LED Dot BDC Hunter Holds .308, 30mm Tube, Low Capped Adjusters

Satin Black: ■ CRHX624-C-2900019 ■ CRHX624-C-2900017

Second Focal Plane (SFP) LED Dot BDC Hunter Holds .223, 30mm Tube, Low Capped Adjusters

Satin Black: ■ CRHX624-C-2900020 ■ CRHX624-C-2900018

1-6x24 (FFP)




MOA Segmented Circle

First Focal Plane (FFP) MOA Segmented Circle, 30mm Tube, Low Capped Adjusters

Satin Black: ■ CRHX624-C-2900021 ■ CRHX624-C-2900022

1-8x28




MOA Segmented Circle

First Focal Plane (FFP) MOA Segmented Circle, 34mm Tube, Exposed Locking Adjusters

Satin Black: ■ CRHX828 -C-2900031

2.5-10x56



MOA Precision Hunter

Standard Duplex


MOA Precision Hunter, 30mm Tube, Exposed Elevation Adjuster with Return-to-Zero Feature

Satin Black: ■ CRHX1056-C-2900027 ■ CRHX1056-C-2900028

Standard Duplex, 30mm Tube, Low Capped Adjusters

Satin Black: ■ CRHX1056-C-2900029 ■ CRHX1056-C-2900030

2.5-15x42




MOA Center Dot

MOA Center Dot, 30mm Tube, Exposed Elevation Adjuster with Return-to-Zero Feature

Satin Black: ■ CRHX1542-C-2900033

2.5-15x56




MOA Center Dot

MOA Center Dot, 30mm Tube, Exposed Elevation Adjuster with Return-to-Zero Feature

Satin Black: ■ CRHX1556-C-2900035

4-16x50



MOA Center Dot

Standard Duplex

MOA Center Dot, 30mm Tube, Exposed Elevation Adjuster with Return-to-Zero Feature

Satin Black: ■ CRHX1650-C-2900001 ■ CRHX1650-C-2900002

Standard Duplex, 30mm Tube, Low Capped Adjusters

Satin Black: ■ CRHX1650-C-2900005 ■ CRHX1650-C-2900006