



Trijicon


# AccuPoint®

**BUILT FOR PERFECTIONISTS BY PERFECTIONISTS.**

The Trijicon AccuPoint® is a premium, variable-powered sporting riflescope featuring a battery-free illuminated reticle, superior glass clarity and rugged construction. Designed to stand up to the elements, the AccuPoint maintains the refinement needed for precise windage and elevation adjustments. The multi-layer, coated lenses provide superior light transmission, while the illuminated reticle aids in quick target engagement.

## Features and Benefits

- A Easy-Focus Eyepiece**  
Diopter accommodates the shooter's individual prescription.
- B Confident Aiming in Any Light**  
Battery-free, illuminated reticles are "always on" using Tritium/Fiber Optic to automatically adjust to lighting conditions.
- C Ideal Function & Position**  
Re-positionable magnification lever accommodates different shooting positions and rifle configurations. Available on higher magnification models.
- D Quick & Easy Adjustments**  
Crisp, precise, windage/elevation adjusters require no tools and are designed to prevent accidental shift.
- E Purpose-Driven Design**  
Multiple finishes, knurling types, and adjuster styles to suit a variety of applications.
- F Optimal Flexibility**  
Generous windage and elevation adjustment for maximum total travel.
- G Ultra Durable for Ensured Reliability**  
Ruggedized design engineered to withstand extreme conditions and tested to military standards and protocols.
- H Edge-to-Edge Clarity**  
Fully multi-coated, broadband, anti-reflective glass provides excellent light transmission, true detail and color, with zero distortion.
- I "Both-Eyes-Open" Shooting**  
Illuminated reticles provide a clear aiming point that draws the shooter's eye for fast engagement.
- J Quick Target Acquisition**  
Proven reticle designs for the most discerning hunters, ensuring fast ranging and holdovers.

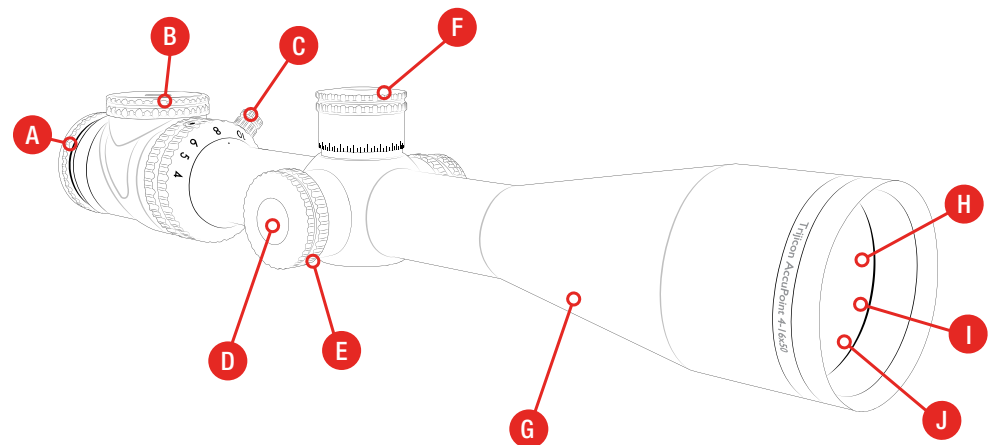



	1-4x24 (TR24 Series)	1-6x24 (TR25 Series)	2.5-10x56 (TR22 Series)
<b>Eye Relief</b>	2.0 – 3.5 in. 52 – 88mm	2.8 – 5.0 in. 71 – 127mm	2.8 – 4.6 in. 71 – 117mm
<b>Exit Pupil</b>	0.69 – 0.20 in. 17.5 – 5.1mm	0.47 – 0.16 in. 12 – 4.1mm	0.64 – 0.22 in. 16.3 – 5.6mm
<b>Field of View (@ 100 yd.) (@ 100m) (degrees)</b>	97.5 – 24.2 ft. 32.5 – 8.1m 18.0° – 4.6°	117.5 – 18.8 ft. 39.2 – 6.3m 21.4° – 3.6°	37.6 – 10.1 ft. 12.5 – 3.4m 7.2° – 1.9°
<b>Focal Plane</b>	Second	Second	Second
<b>Adjustments</b>	1/4 MOA Per Click	1/4 MOA Per Click 0.1 MIL Per Click	1/4 MOA Per Click
<b>Adjustment Range Total Travel</b>	90 MOA	110 MOA / 32.6 MIL	60 MOA
<b>Parallax Adjustment Range</b>	N/A	N/A	N/A
<b>Finish</b>	Matte	Matte	Matte
<b>Fiber Adjustment Range</b>	Fiber Strip	Fiber Dial	Fiber Strip
<b>Dimensions (L x W x H)</b>	10.3 x 2.0 x 2.0 in.	11.0 x 2.0 x 2.0 in.	13.8 x 2.6 x 2.6 in.
<b>Weight</b>	14.4 oz.	19.2 oz.	20.7 oz.
<b>Illumination Source</b>	Fiber Optics & Tritium	Fiber Optics & Tritium	Fiber Optics & Tritium
<b>Tube Diameter</b>	30mm	30mm	30mm



	2.5-12.5x42 (TR26 Series)	3-9x40 (TR20 Series)	3-18x50 (TR34 Series)	4-16x50 (TR31 Series)
<b>Eye Relief</b>	2.2 – 3.8 in. 56 – 97mm	2.2 – 3.8 in. 56 – 97mm	3.4 – 4.0 in. 87 – 101mm	3.1 – 3.8 in. 78 – 96mm
<b>Exit Pupil</b>	0.42 – 0.13 in. 10.6 – 3.3mm	0.52 – 0.17 in. 13.3 – 4.4mm	0.45 – 0.11 in. 11.4 – 2.8mm	0.33 – 0.12 in. 8.5 – 3.1mm
<b>Field of View (@ 100 yd.) (@ 100m) (degrees)</b>	41.3 – 8.3 ft. 13.8 – 2.8m 7.8° – 1.6°	33.8 – 11.3 ft. 11.3 – 3.8m 6.5° – 2.2°	34.7 – 5.8 ft. 11.6 – 1.9m 6.62° – 1.11°	28.5 – 7.1 ft. 9.5 – 2.4m 5.43° – 1.36°
<b>Focal Plane</b>	Second	Second	Second	Second
<b>Adjustments</b>	1/4 MOA Per Click 0.1 MIL Per Click	1/4 MOA Per Click	1/4 MOA Per Click	1/4 MOA Per Click 0.1 MRAD Per Click
<b>Adjustment Range Total Travel</b>	90 MOA / 26.1 MIL	40 MOA / 11.6 MIL	60 MOA	70 MOA (C) / 70 MOA (C) 100 MOA (E) / 70 MOA (C) 29 MRAD (E) / 20.1 MRAD (C)
<b>Parallax Adjustment Range</b>	10 yds. to Infinity	N/A	N/A	10 yds. to Infinity
<b>Finish</b>	Matte	Matte	Satin	Matte / Satin
<b>Fiber Adjustment Range</b>	Fiber Dial	Fiber Strip	Fiber Dial	Fiber Dial
<b>Dimensions (L x W x H)</b>	13.8 x 2.4 x 2.3 in.	12.4 x 1.9 x 1.9 in.	14.81 x 2.87 x 2.76 in.	14.4 x 2.9 x 2.4 in.
<b>Weight</b>	22.4 oz.	13.4 oz.	27.1 oz.	25.9 - 26.8 oz.
<b>Illumination Source</b>	Fiber Optics & Tritium	Fiber Optics & Tritium	Fiber Optics & Tritium	Fiber Optics & Tritium
<b>Tube Diameter</b>	30mm	1 in.	30mm	30mm

(E) = Exposed Adjusters (C) = Capped Adjusters

# Specifications



»NEW



»NEW

	4-24x50 (TR32 Series)	5-20x50 (TR33 Series)
<b>Eye Relief</b>	3.1 – 3.8 in. 78 – 96mm	3.1 – 3.8 in. 78 – 96mm
<b>Exit Pupil</b>	0.33 – 0.08 in. 8.5 – 2.1mm	0.3 – 0.10 in. 7.8 – 2.5mm
<b>Field of View (@ 100 yd.) (@ 100m) (degrees)</b>	28.5 – 4.7 ft. 9.5 – 1.6m 5.43° – 0.91°	22.8 – 5.7 ft. 7.6 – 1.9m 4.35° – 1.09°
<b>Focal Plane</b>	Second	Second
<b>Adjustments</b>	1/4 MOA Per Click	1/4 MOA Per Click 0.1 MRAD Per Click
<b>Adjustment Range Total Travel</b>	100 MOA Elevation 70 MOA Windage	100 MOA / 29 MRAD Elevation 70 MOA / 20.4 MRAD Windage
<b>Parallax Adjustment Range</b>	10 yds. to Infinity	10 yds. to Infinity
<b>Finish</b>	Satin	Matte / Satin
<b>Fiber Adjustment Range</b>	Fiber Dial	Fiber Dial
<b>Dimensions (L x W x H)</b>	14.4 x 2.9 x 2.4 in.	14.4 x 2.9 x 2.4 in.
<b>Weight</b>	26.8 oz.	26.8 - 26.9 oz.
<b>Illumination Source</b>	Fiber Optics & Tritium	Fiber Optics & Tritium
<b>Tube Diameter</b>	30mm	30mm

## 1-4x24



BAC  
Triangle Post



German #4



Standard  
Duplex

### BAC, Triangle Post Reticle, 30mm Tube, Capped Adjusters

Matte Black: ■ TR24G ■ TR24 ■ TR24R

### German #4 Crosshair, 30mm Tube, Capped Adjusters

Matte Black: ■ TR24-3G ■ TR24-3

### Standard Duplex Crosshair, 30mm Tube, Capped Adjusters

Matte Black: ■ TR24-C-200071 ■ TR24-C-200070

## 1-6x24




Standard  
Duplex



German #4




Circle Cross



MOA Dot



BAC  
Triangle Post



MIL Dot

### Standard Duplex Crosshair, 30mm Tube, Capped Adjusters

Matte Black: ■ TR25-C-200080

### German #4 Crosshair, 30mm Tube, Capped Adjusters

Matte Black: ■ TR25-C-200083

### Circle-Cross Crosshair, 30mm Tube, Capped Adjusters

Matte Black: ■ TR25-C-200086

### MOA-Dot Crosshair, 30mm Tube, Capped Adjusters

Matte Black: ■ TR25-C-200089


### BAC, Triangle Post Reticle, 30mm Tube, Capped Adjusters

Matte Black: ■ TR25-C-200092 ■ TR25-C-200091 ■ TR25-C-200090

### MIL-Dot Crosshair, 30mm Tube, Capped Adjusters

Matte Black: ■ TR25-C-200095

## 2.5-10x56

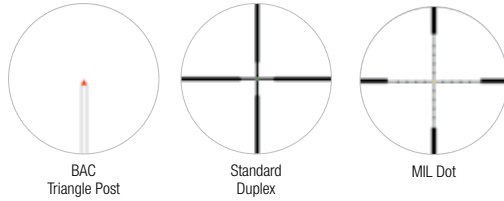

### BAC, Triangle Post Reticle, 30mm Tube, Capped Adjusters

Matte Black: ■ TR22G ■ TR22 ■ TR22R


### Standard Duplex Crosshair, 30mm Tube, Capped Adjusters

Matte Black: ■ TR22-1G ■ TR22-1

### MIL-Dot Crosshair, 30mm Tube, Capped Adjusters

Matte Black: ■ TR22-2G ■ TR22-2

## 2.5-12.5x42

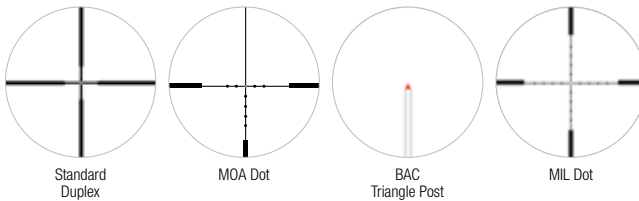

### Standard Duplex Crosshair with Green Dot, 30mm Tube, Capped Adjusters

Matte Black: ■ TR26-C-200098

### MOA-Dot Crosshair with Green Dot, 30mm Tube, Capped Adjusters

Matte Black: ■ TR26-C-200104


### BAC, Triangle Post Reticle, 30mm Tube, Capped Adjusters

Matte Black: ■ TR26-C-200107 ■ TR26-C-200106 ■ TR26-C-200105

### MIL-Dot Crosshair with Green Dot, 30mm Tube, Capped Adjusters

Matte Black: ■ TR26-C-200110

## 3-9x40

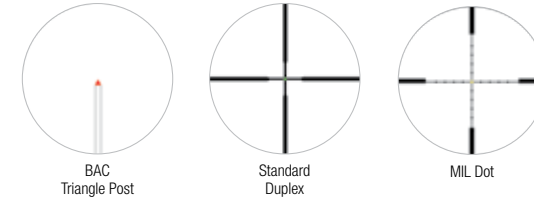

### BAC, Triangle Post Reticle, 1 in. Tube, Capped Adjusters

Matte Black: ■ TR20G ■ TR20 ■ TR20R


### Standard Duplex Crosshair, 1 in. Tube, Capped Adjusters

Matte Black: ■ TR20-1G ■ TR20-1

### MIL-Dot Crosshair, 1 in. Tube, Capped Adjusters

Matte Black: ■ TR20-2G ■ TR20-2

## 3-18x50




**>>NEW**

### MOA Ranging Reticle, 30mm Tube, Exposed Elevation with Return to Zero Feature

Satin Black: ■ TR34-C-200158

## 4-16x50

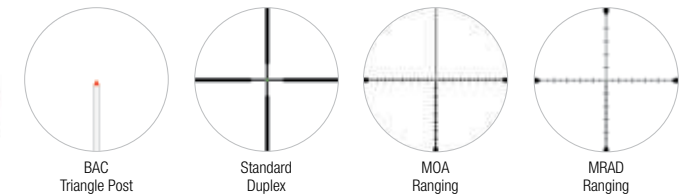

**>>NEW**

### BAC, Triangle Post Reticle, 30mm Tube, Low Capped Adjusters

Satin Black: ■ TR31-C-200145 ■ TR31-C-200143

### Standard Duplex Crosshair, 30mm Tube, Low Capped Adjusters

Satin Black: ■ TR31-C-200146

### MOA Ranging Crosshair, 30mm Tube, Exposed Elevation Adjuster with Return-to-Zero Feature

Satin Black: ■ TR31-C-200147

### MRAD Ranging Crosshair, 30mm Tube, Exposed Elevation Adjuster with Return-to-Zero Feature


Matte Black: ■ TR31-C-200148



# 4-24x50



»NEW



MOA Ranging

## MOA Ranging Crosshair, 30mm Tube, Exposed Elevation Adjuster with Return-to-Zero Feature

Satin Black: ■ TR32-C-200157

# 5-20x50



»NEW




BAC Triangle Post




Standard Duplex



MIL Dot



MRAD Ranging



MOA Ranging

## BAC, Triangle Post Reticle, 30mm Tube, Exposed Adjusters with Return to Zero Elevation Feature

Satin Black: ■ TR33-C-200154 ■ TR33-C-200152

## Standard Duplex Crosshair, 30mm Tube, Exposed Adjusters

Matte Black: ■ TR23-1G

## Standard Duplex Crosshair, 30mm Tube, Exposed Adjusters with Return to Zero Elevation Feature

Satin Black: ■ TR33-C-200155

## MIL-Dot Crosshair, 30mm Tube, Exposed Adjusters

Matte Black: ■ TR23-2G

## MRAD Ranging Crosshair, 30mm Tube, Exposed Adjusters with Return-to-Zero Elevation Feature

Matte Black: ■ TR33-C-200149

## MOA Ranging Crosshair, 30mm Tube, Exposed Adjusters with Return-to-Zero Elevation Feature

Satin Black: ■ TR33-C-200151

