



Trijicon


Credo[™]

BREAK A SWEAT WITHOUT BREAKING YOUR OPTIC.

What we've learned from decades of deployment with America's greatest fighting forces, we've put back into our technology for the Trijicon Credo[™] tactical riflescope. It delivers an incredibly clear sight picture, green or red illuminated reticles, superior target acquisition, and rugged durability.

Features and Benefits

- A Easy-Focus Eyepiece**
Diopter accommodates the shooter's individual prescription.
- B Re-Positionable Magnification Lever***
Accommodates different shooting positions and rifle configurations.
- C Confident Aiming in Any Light**
User-selectable LED brightness settings with an "off" in between each setting to adapt to any environment.
- D Quick & Easy Adjustments**
Crisp, precise, windage/elevation adjusters require no tools and are designed to prevent accidental shift.
- E Purpose-Driven Design**
Matte finish and easy-grip controls for fast, intuitive adjustments.
- F Ultra Durable for Ensured Reliability**
Ruggedized design engineered to withstand extreme conditions and tested to military standards and protocols.
- G Edge-to-Edge Clarity**
Fully multi-coated, broadband, anti-reflective glass provides excellent light transmission, true detail and color, with zero distortion.
- H "Both-Eyes-Open" Shooting**
Illuminated reticles provide a clear aiming point that draws the shooter's eye for fast engagement.
- I Rapid Target Acquisition**
Choose from a variety of specially engineered reticle designs for fast ranging and holdovers.
- J Fast Scanning, Detection, and Tracking**
Extra-wide field of view for maximum situational awareness.

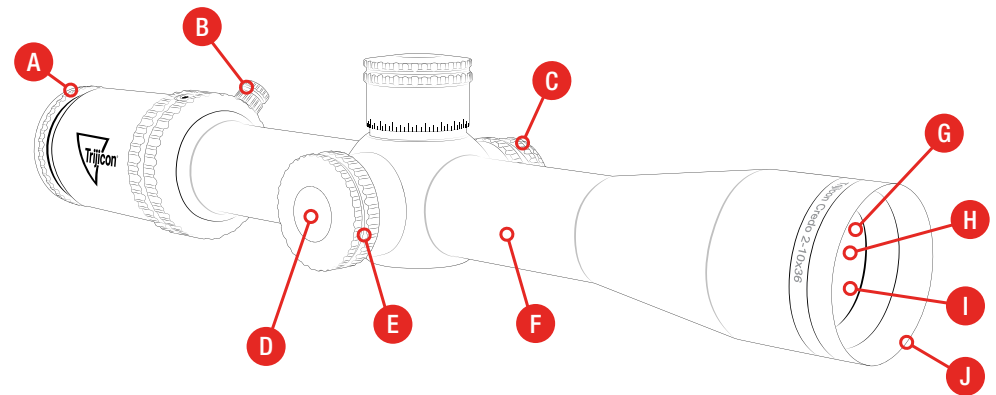

**Available for most models*



	1-4x24 (CR424 Series)	1-6x24 (CR624 Series)	1-8x28 (CR828 Series)
Eye Relief	2.6 – 3.9 in. 65 – 98mm	3.5 – 3.9 in. 88 – 100mm	3.0 – 4.0 in. 76 – 101mm
Exit Pupil	.69 – .2 in. 17.5 – 5.1mm	.47 – .16 in. 12.0 – 4.1mm	.46 – .14 in. 11.7 – 3.5mm
Field of View (@ 100 yd.) (@ 100m) (degrees)	95 – 24.2 ft. 31.7 – 8.1m 18.0° – 4.6°	113.4 – 18.8 ft. 37.8 – 6.3m 21.4° – 3.58°	105.8 – 13.2 ft. 35.3 – 4.4m 20° – 2.53°
Focal Plane	Second	First / Second	First
Adjuster Style	Capped	Capped	Exposed Locking
Adjustments	0.1 MRAD Per Click	0.1 MRAD Per Click	0.1 MRAD Per Click
Adjustment Range Total Travel	29 MRAD	29 MRAD	29.1 MRAD
Parallax Adjustment Range	N/A	N/A	N/A
Finish	Matte	Matte	Matte
Dimensions (L x W x H)	10.5 x 2.7 x 1.9 in.	11.0 x 2.0 x 2.0 in.	10.8 x 3.2 x 2.6 in.
Weight	17.1 oz.	18.2 – 18.9 oz.	25.6 oz.
Illumination Source	LED Powered by a CR2032 Lithium Battery	LED Powered by a CR2032 Lithium Battery	LED Powered by a CR2032 Lithium Battery
Tube Diameter	30mm	30mm	34mm




	2-10x36 (CR1036 Series)	2.5-10x56 (CR1056 Series)	2.5-15x42 (CR1542 Series)	2.5-15x56 (CR1556 Series)
Eye Relief	3.4 – 3.9 in. 87 – 99mm	2.8 – 4.0 in. 72 – 102mm	3.4 – 3.9 in. 85 – 100mm	3.3 – 3.9 in. 85 – 99mm
Exit Pupil	.41 – .13 in. 10.5 – 3.4mm	.64 – .21 in. 16.2 – 5.4mm	.42 – .11 in. 10.7 – 2.8mm	.46 – .15 in. 11.6 – 3.7mm
Field of View (@ 100 yd.) (@ 100m) (degrees)	50.0 – 10.1 ft. 16.7 – 3.4m 9.53° – 1.92°	38.3 – 10.2 ft. 12.8 – 3.4m 7.3° – 1.94°	41.2 – 6.9 ft. 13.7 – 2.3m 7.86° – 1.31°	43.1 – 7.4 ft. 14.4 – 2.5m 8.22° – 1.42°
Focal Plane	First	Second	Second	Second
Adjuster Style	Exposed / Capped	Exposed / Capped	Exposed / Capped	Exposed / Capped
Adjustments	1/4 MOA / 0.1 MRAD Per Click	1/4 MOA Per Click	1/4 MOA Per Click	1/4 MOA Per Click
Adjustment Range Total Travel	90 MOA / 26.2 MRAD	50 MOA	100 MOA Elevation 80 MOA Windage	60 MOA
Parallax Adjustment Range	N/A	N/A	10 yds. to Infinity	10 yds. to Infinity
Finish	Matte	Matte	Matte	Matte
Dimensions (L x W x H)	13.1 x 3.24 x 2.6 in.	13.8 x 2.9 x 2.6 in.	13.9 x 3.3 x 2.6 in.	14.7 x 3.2 x 2.8 in.
Weight	23 oz.	25.3 oz.	22.9 oz.	27 oz.
Illumination Source	LED Powered by a CR2032 Lithium Battery	LED Powered by a CR2032 Lithium Battery	LED Powered by a CR2032 Lithium Battery	LED Powered by a CR2032 Lithium Battery
Tube Diameter	30mm	30mm	30mm	30mm



	3-9x40 (CR940 Series)	4-16x50 (CR1650 Series)
Eye Relief	3.5 – 3.7 in. 90 – 93mm	3.1 – 3.8 in. 78 – 96mm
Exit Pupil	0.52 – 0.17 in. 13.3 – 4.4mm	0.33 – 0.12 in. 8.5 – 3.1mm
Field of View (@ 100 yd.) (@ 100m) (degrees)	35.5 – 11.8 ft. 11.8 – 3.9m 6.75° – 2.25°	28.5 – 7.1 ft. 9.5 – 2.4m 5.43° – 1.36°
Focal Plane	Second	Second
Adjuster Style	Capped	Exposed / Capped
Adjustments	1/4 MOA Per Click	1/4 MOA Per Click / 0.1 MRAD
Adjustment Range Total Travel	60 MOA	70 MOA
Parallax Adjustment Range	N/A	10 yds. to Infinity
Finish	Matte	Matte
Dimensions (L x W x H)	12.3 x 2.5 x 2.2 in.	14.5 x 3.3 x 2.4 in.
Weight	17.02 oz.	25.5 oz.
Illumination Source	LED Powered by a CR2032 Lithium Battery	LED Powered by a CR2032 Lithium Battery
Tube Diameter	1 in.	30mm

1-4x24



MRAD Ranging, 30mm Tube, Low Capped Adjusters

Matte Black: ■ CR424-C-2900011 ■ CR424-C-2900012

BDC Segmented Circle .223 / 55gr, 30mm Tube, Low Capped Adjusters

Matte Black: ■ CR424-C-2900013 ■ CR424-C-2900014


1-6x24 (SFP)



Second Focal Plan (SFP) BDC Segmented Circle .223 / 55gr, 30mm Tube, Low Capped Adjusters

Matte Black: ■ CR624-C-2900015 ■ CR624-C-2900016

1-6x24 (FFP)



First Focal Plane (FFP) MRAD Segmented Circle, 30mm Tube, Low Capped Adjusters

Matte Black: ■ CR624-C-2900023 ■ CR624-C-2900024


1-8x28



First Focal Plane (FFP) MRAD Segmented Circle, 34mm Tube, Exposed Locking Adjusters

Matte Black: ■ CR828-C-2900032

2-10x36




First Focal Plane (FFP) Rifle Scope MOA Precision Tree, 30mm Tube, Exposed Elevation Adjuster with Return-to-Zero Feature

Matte Black: ■ CR1036-C-2900037

First Focal Plane (FFP) MRAD Precision Tree, 30mm Tube, Exposed Elevation Adjuster with Return-to-Zero Feature

Matte Black: ■ CR1036-C-2900038


2.5-10x56



MRAD Ranging, 30mm Tube, Exposed Elevation Adjuster with Return-to-Zero Feature

Matte Black: ■ CR1056-C-2900025 ■ CR1056-C-2900026


2.5-15x42



MRAD Center Dot, 30mm Tube, Exposed Elevation Adjuster with Return-to-Zero Feature

Matte Black: ■ CR1542-C-2900034


2.5-15x56



MRAD Center Dot, 30mm Tube, Exposed Elevation Adjuster with Return-to-Zero Feature

Matte Black: ■ CR1556-C-2900036

3-9x40

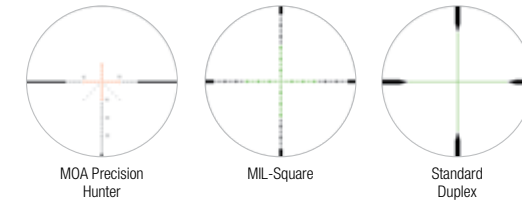

MOA Precision Hunter, 1 in. Tube, Low Capped Adjusters

Matte Black: ■ CR940-C-2900039 ■ CR940-C-2900040

MIL-Square, 1 in. Tube, Low Capped Adjusters

Matte Black: ■ CR940-C-2900041 ■ CR940-C-2900042

Standard Duplex, 1 in. Tube, Low Capped Adjusters

Matte Black: ■ CR940-C-2900043 ■ CR940-C-2900044

4-16x50



MRAD Center Dot, 30mm Tube, Exposed Elevation Adjuster with Return-to-Zero Feature

Matte Black: ■ CR1650-C-2900003 ■ CR1650-C-2900004