



Trijicon


# Tenmile™ HX

**HERE'S TO CARRYING OUT MORE THAN YOU CARRY IN.**

When you need to dial in long-range shots in the toughest environments, trust the Trijicon Tenmile™ HX rifle scope. Equipped with illuminated precision hunting reticles, outstanding glass, and rugged construction, the Tenmile HX stands up to anything nature throws at you.

## Features and Benefits

- A Easy-Focus Eyepiece**  
Diopter accommodates the shooter's individual prescription.
- B Re-positionable Magnification Lever**  
Accommodates different shooting positions and rifle configurations.
- C Optimal Flexibility**  
Generous windage and elevation adjustment for maximum total travel.
- D Confident Aiming in Any Light**  
User-selectable LED brightness settings with an "off" in between each setting to adapt to any environment.
- E Quick & Easy Adjustments**  
Crisp, precise, windage/elevation adjusters require no tools and are designed to prevent accidental shift.
- F Purpose-Driven Design**  
Sleek finish and low-profile controls prevent snagging.
- G Increased Adjuster Range**  
30mm tube offers increased durability and adjuster range.
- H Ultra Durable for Ensured Reliability**  
Ruggedized design engineered to withstand extreme conditions and tested to military standards and protocols.
- I Edge-to-Edge Clarity**  
Fully multi-coated, broadband, anti-reflective glass provides excellent light transmission, true detail, and color with zero distortion.
- J "Both-Eyes-Open" Shooting**  
Illuminated reticles provide a clear aiming point that draws the shooter's eye for fast engagement.
- K Pinpoint Aiming in Any Condition**  
Precise milling and holdover reticles available in first or second focal plane for ensured accuracy.

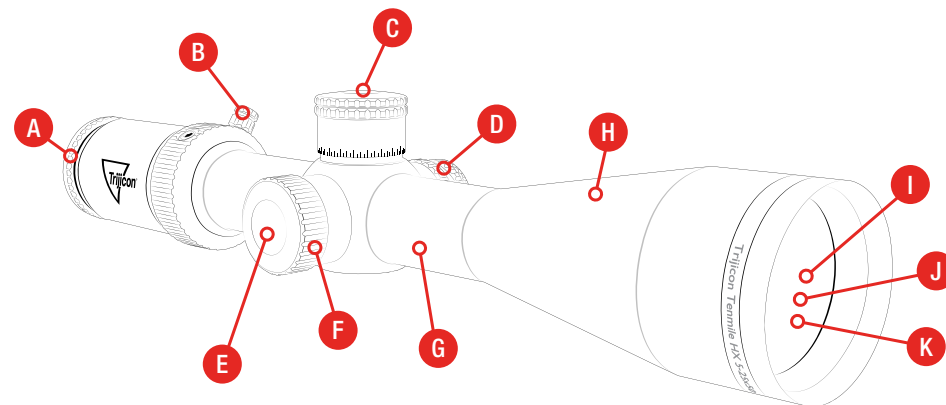




	3-18x44 (TMHX1844 Series)	3-18x50 (TMHX1850 Series)
<b>Eye Relief</b>	3.4 – 3.9 in. 87 – 100mm	3.4 – 4.0 in. 87 – 101mm
<b>Exit Pupil</b>	0.45 – 0.09 in. 11.4 – 2.4mm	0.45 – 0.11 in. 11.4 – 2.8mm
<b>Field of View (@ 100 yd.) (@ 100m) (degrees)</b>	35.3 – 5.9 ft. 11.8 – 2.0m 6.73° – 1.12°	34.7 – 5.8 ft. 11.6 – 1.9m 6.62° – 1.11°
<b>Focal Plane</b>	First	Second
<b>Adjuster Style</b>	Exposed / Capped	Capped
<b>Adjustments</b>	1/4 MOA Per Click	0.1 MRAD Per Click
<b>Adjustment Range Total Travel</b>	60 MOA	17 MRAD
<b>Parallax Adjustment Range</b>	15 yds. to Infinity	15 yds. to Infinity
<b>Finish</b>	Satin	Satin
<b>Dimensions (L x W x H)</b>	15.02 x 3.26 x 2.4 in.	14.87 x 3.26 x 2.59 in.
<b>Weight</b>	24.4 oz.	25.7 oz.
<b>Illumination Source</b>	LED Powered by CR2032 Lithium Battery	LED Powered by CR2032 Lithium Battery
<b>Tube Diameter</b>	30mm	30mm

	5-25x50 (TMHX2550 Series)	6-24x50 (TMHX2450 Series)
<b>Eye Relief</b>	2.9 – 3.9 in. 73 – 99mm	3.1 – 3.8 in. 79 – 96mm
<b>Exit Pupil</b>	0.39 – 0.08 in. 10.0 – 2.0mm	0.29 – 0.08 in. 7.5 – 2.1mm
<b>Field of View (@ 100 yd.) (@ 100m) (degrees)</b>	20.1 – 4.0 ft. 6.7 – 1.3m 3.83° – 0.77°	19.0 – 4.7 ft. 6.3 – 1.6m 3.62° – 0.91°
<b>Focal Plane</b>	Second	Second
<b>Adjuster Style</b>	Exposed / Capped	Capped
<b>Adjustments</b>	1/4 MOA Per Click	1/4 MOA Per Click
<b>Adjustment Range Total Travel</b>	50 MOA Elevation 40 MOA Windage	70 MOA
<b>Parallax Adjustment Range</b>	25 yds. to Infinity	10 yds. to Infinity
<b>Finish</b>	Satin	Satin
<b>Dimensions (L x W x H)</b>	13.5 x 3.3 x 2.8 in.	14.45 x 3.05 x 2.14 in.
<b>Weight</b>	25.6 oz.	24.9 oz.
<b>Illumination Source</b>	LED Powered by CR2032 Lithium Battery	LED Powered by CR2032 Lithium Battery
<b>Tube Diameter</b>	30mm	30mm

## 3-18x44




MOA  
Precision Tree

First Focal Plane (FFP) MOA Precision Tree, 30mm Tube, Exposed Elevation Adjuster with Return-to-Zero Feature

Satin Black:  TMHX1844-C-3000001

## 3-18x50




MRAD  
Center Dot

MRAD Center Dot, 30mm Tube, Exposed Elevation Adjuster with Return-to-Zero Feature

Satin Black:  TMHX1850-C-3000009

## 5-25x50




MOA  
Center Dot

MOA Center Dot, 30mm Tube, Exposed Elevation Adjuster with Return-to-Zero Feature



Satin Black:  TMHX2550-C-3000010

## 6-24x50



LED Dot  
MOA Ranging

LED Dot MOA Ranging LED Dot, 30mm Tube, Low Capped Adjusters

Satin Black:  TMHX2450-C-3000003  TMHX2450-C-3000004

